

# FS(V)N(Y)3E / FSNM1



 Set FREE VRF Systems

## SET FREE

COMMERCIAL PREMISES AND OFFICES:  
UP TO 12 INDOOR UNITS

### Functions

- ✓ **UP TO 12 INDOOR UNITS**
- ✓ **INDEPENDENT CONTROL**
- ✓ Indoor units from 0.6 (switched) to **10HP**
- ✓ Low sound level: **49 dB** (size 4)
- ✓ Drop between indoor units of **15m**: ability to use over 4 levels
- ✓ Connection ratio from 50 to **130%**
- ✓ **INTELLIGENT DEMAND MANAGEMENT**  
(Avoids peaks in consumption) and stores the **last 15 events before fault** (quick troubleshooting).



COP  
**4.24**

EER  
**4.12**



### Design

- ✓ All of the Hitachi indoor units are compatible.

### Category leader



-20%  
weight

-40%  
volume

Compared to a  
conventional model

### SYSTEM FREE INDOORS



CASSETTE



FLOOR-MOUNTED



CEILING SUSPENDED



DUCTED



WALL-MOUNTED

# FS(V)N(Y)3E / FSNM1

## VRF Mini / Side flow 2-pipe




### COMPATIBLE WITH SMALL UNITS

Can connect with new 0.6HP

## Installation


The Set Free FS(V)N(Y)3E / FSNM1 includes a distinct characteristic which makes it possible to implement complex networks (VRF type “network architecture”).

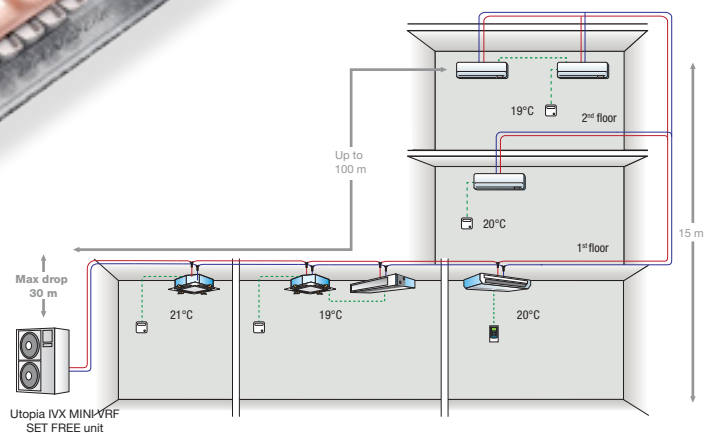

## Ease of installation



### COMPACT AND EFFICIENT

The floor area required for the Set Free FS(V)N(Y)3E / FSNM1 outdoor unit range varies according to the model and is only between 0.35m<sup>2</sup> and 0.43m<sup>2</sup>. Thin profile (between 37cm and 39cm), its volume is reduced by approximately 40% compared to conventional models. Consequently, the installation only requires a little space:



The performance of SET FREE FS(V)N(Y)3E units is unmatched in m<sup>2</sup>: up to 65% more power output for the same surface area.

## Wide range

	HP	4	5	6	8	10	12
 <b>SET FREE FS(V)N(Y)3E</b> (page 176)		1/3	1/3	1/3			
 <b>SET FREE FSNM1</b> (page 177)					3	3	3

1: 1 phase  
3: 3 phase

# Outdoor Units

## SET FREE FSNM1 Side Flow

		RAS 8FSNM1	RAS 10FSNM1	RAS 12FSNM1
Power supply		415V / 3Ph / 50Hz	415V / 3Ph / 50Hz	415V / 3Ph / 50Hz
Nominal Cooling Capacity (min - max) <sup>(1)</sup>	<i>kW</i>	22.4	28.0	33.5
Nominal Heating Capacity (min - max) <sup>(2)</sup>	<i>kW</i>	25.0	31.5	37.5
Minimum - Maximum Indoor Units		1 - 10*	1 - 10*	1 - 10*
Minimum - Maximum connected capacity		50% - 130%	50% - 130%	50% - 130%
Nominal Load Efficiency EER / COP <sup>(3)</sup>		3.56 / 4.24	3.21 / 4.04	3.13 / 3.79
Energy Class (Cool/Heat)		A / A	A / A	B / A
Noise level cooling (sound pressure) (night mode) <sup>(4)</sup>	<i>dB(A)</i>	53 (tbc)	56 (tbc)	59 (tbc)
Noise level heating (sound pressure) <sup>(4)</sup>	<i>dB(A)</i>	55	58	61
Noise level (sound power) <sup>(5)</sup>	<i>dB(A)</i>	71	74	77
Air flow (Cooling / Heating)	<i>m<sup>3</sup>/h</i>	7260	9000	9780
Dimensions (H x W x D)	<i>mm</i>	1650 x 1100 x 390	1650 x 1100 x 390	1650 x 1100 x 390
Weight	<i>kg</i>	170	170	173
Piping diameter (Liquid / Gas)	<i>Inch</i>	3/8 / 3/4	1/2 / 7/8	1/2 / 1 1/8
	<i>mm</i>	9.52 / 19.05	12.70 / 22.20	12.70 / 28.60
Total Piping Length / Height Difference	<i>m</i>	250 / 40	250 / 40	250 / 40
Max Piping Length (outdoor to indoor)	<i>m</i>	100	100	100
Current Quantity of Refrigerant	<i>kg</i>	5.0	5.5	6.5
Chargeless / Additional Refrigerant Charge	<i>m / g/m</i>	calculate	calculate	calculate
Recommended fuse size	<i>A</i>	16	20	25
Starting current	<i>A</i>	8	8	8
Running current (cooling / heating)	<i>A</i>	9.4 / 8.8	12.4 / 11.7	15.8 / 14.7
Working Range (cooling / heating)	<i>°C</i>	-5°C~46(db)°C / -20°C~-15(wb)°C		
Refrigerant / GWP		R410a / 1975	R410a / 1975	R410a / 1975
Compressor type		Scroll	Scroll	Scroll

\* Restrictions apply, see Technical Catalogue

(1) Nominal Cooling: Internal temperature 27°C db (19°C wb) - Ambient 35°C

(2) Nominal Heating: Internal temperature 20°C - Ambient 7°C db (6°C wb)

(3) Nominal load efficiency (Cooling 35°C/27°C, Heating 7°C/20°C)

(4) Sound pressure level is measured at 1.0m from the unit front surface and 1.5m from floor level (Measured in an anechoic chamber)

(5) Sound power level is the A-weighted sound power level [dB(A)] measured at standard rated conditions for the "cooling" mode operation in accordance to EN12102.

# Set Free FSNM1

20% lighter, 40% smaller  
and up to 65% more power output  
than similar units with the same surface area.