



YORK Commercial & Industrial HVAC 2020



The power behind **your mission**





A more comfortable,
safe and sustainable world

Take advantage of a broader range of capabilities

Johnson Controls provides a wide spectrum of innovative products, expert installation and services, and systems integration to help improve operational and energy outcomes and power its customers' mission worldwide.



HVAC EQUIPMENT

Draw on the most comprehensive HVAC portfolio for commercial and residential buildings of all types, ages and sizes to enhance sustainability, energy use and the indoor environment.

- Chillers: Air-Cooled, Water-Cooled, Heat Pumps and Absorption; Cloud connected chillers
- Condensers and condensing units
- Dedicated outdoor air systems (DOAS)
- Duct-free mini-split systems
- Indoor packaged equipment and Rooftop units
- Variable refrigerant flow (VRF) systems

SECURITY

Help protect and enhance working and living environments today and tomorrow with integrated, customer-specific solutions from the world's leading security company.

- 24/7 remote monitoring
- Access control
- Advanced video surveillance systems and content analytics
- Intrusion detection
- Managed services

CONTROLS

Equip facilities with intelligent HVAC controls to keep occupants comfortable, run equipment efficiently and optimize operating budgets.

- Actuators
- Control panels
- Control sensors
- Current sensors and transducers
- Thermostats
- Valves
- Variable speed drives

FIRE, LIFE-SAFETY & HAZARD PROTECTION

Help keep people and assets safe with comprehensive solutions, design, installation, service and monitoring from a world leading fire and life-safety systems provider.

- Fire alarm systems
- Fire sprinkler systems
- Fire suppression systems (stationary and mobile)
- Mass notification systems
- Special hazard solutions

OPTIMIZATION & RETROFIT SERVICES

Make the most of existing building and financial assets through cost-effective upgrades, central plant strategies, and financing solutions.

- Central chiller plant optimization
- Clean energy assessments
- Energy performance contracts
- Energy retrofits
- Equipment financing
- Healthcare environment optimization
- Public/private partnerships
- Technology refresh services
- Turnkey upgrades and retrofits
- Chiller Rental Solutions

LIGHTING CONTROLS & RETROFIT

Save energy, minimize costs and meet organizational goals with a range of services, from business remodels, to new construction lighting design, to municipal street lights.

- Lighting retrofits
- Street and roadway lighting
- Turnkey lighting upgrades

ENERGY STORAGE

Rely on our innovative distributed energy storage products to better manage energy use, cut costs and ensure electrical back-up for a building, campus or enterprise.

- In-building distributed energy storage system
- Modular distributed energy storage system

RETAIL SOLUTIONS

Gain real-time insights into retail facilities, inventories, employees & customers to achieve maximum business performance in a digitally driven shopping world.

- Loss Prevention
- Inventory Intelligence
- Traffic Insights

OPERATIONAL INTELLIGENCE & LOSS PREVENTION

Helps minimize costs, maximize operational performance and enhance return on investment in security programs with business intelligence solutions.

- Information management solutions
- Real-time location systems (RTLS) for asset management
- Video and traffic analytics

BUILDING SERVICES & PARTS

Tap into resources of the industry's largest service network for HVAC, security and life-safety system installation and product support. More than 12,000 technicians working out of nearly 500 local offices can provide 24x7x365 proactive monitoring, remote and on-site service and repair, and replacement parts.

- Aftermarket parts
- Building remote monitoring
- Building system and HVAC repair
- Planned and preventive maintenance
- Predictive and diagnostic services
- Security and life-safety system repair

BUILDING AUTOMATION SYSTEMS

Connect commercial HVAC, lighting, security and protection systems on one platform. Vital data and insights improve efficiency, productivity, and occupants' comfort and safety.

- Metasys building automation system
- Metasys Enterprise Optimization applications
- Metasys Room Automation Solution
- Hotels Guest Room Management Solution

AIR SYSTEMS

Use efficient air flow building-wide to create healthy, comfortable and visually appealing environments that increase work productivity and occupant satisfaction.

- Air handling units
- Air measuring
- Chilled beams
- Dampers
- EcoAdvance™ HVAC load reduction (HLR) module
- Energy recovery ventilators
- Fan and blower
- Fans
- Filtration
- Grilles and diffusers
- Heating coils and cooling coils
- Louvers
- Under floor air distribution
- Unit ventilators
- Variable air volume (VAV) terminals
- Variable speed drives

BUILDING WIDE SYSTEMS INTEGRATION





Construct a smarter building by converging building, business/IT and specialty systems on an intelligent infrastructure. Let us streamline the process to measurably improve initial and lifecycle costs, enhance function, ensure connectivity and create an innovative, optimized, sustainable environment.

Reference sites

Our commitment to sustainability and energy efficiency dates back to 1885, with Warren Johnson's invention of the first electric room thermostat. Since then our focus has always been to increase a building's efficiency and operational performance.

The following sites represent building solutions we have developed for our customers based on wide-ranging cross industrial experience in HVAC&R equipment, controls, fire and security systems, and services for commercial and industrial buildings.





1
First building in Austria to be awarded a Green Building Certificate
Johnson Controls Metasys Building Automation System helps UNIQA Towers in Vienna achieve a Green Building Certificate for energy efficiency.

3
Cisco. UK
Smart+Connected Communities installation designed to save energy costs and improves performance.

5
THI GROUP
Solutions for the hospitality industry.

7
IBM Headquarters
Adding value and conserving energy from the inside out.

2
The Gregor Mendel Institute
State-of-the-art technologies for world-class research.

4
Fiserv (Europe) Ltd
Utilising latest developments in chiller's technology delivers energy savings and ongoing cost reductions for Fiserv.

6
British Embassy. Berlin
Full Lifecycle Solution for British Government's first Private Finance Initiative outside the UK.

8
Cologne Convention Center
The centrifugal chillers and the building automation system are indispensable in creating and managing an optimal indoor environment.



Catalogue content

Chillers & Heat Pumps

AMICHI-S SERIES Air cooled DC Inverter reversible heat pump	12
AMICHI SERIES Modular air cooled scroll chiller / heat pump	14
YCME / YHME Modular air cooled twin screw chiller / heat pump	18
YLAA Air-cooled scroll compressor chiller	22
YLPB Air cooled heat pump scroll compressor	26
YVAA Air-cooled VSD screw chiller	30
YVFA Air-cooled VSD screw chiller with integrated Free-cooling	36
YMWA / YMRA Water-cooled cooling only, remote condenser and heat pump scroll compressor chiller	42
YCSE / YCRE Style C Water-cooled or remote air-cooled screw compressor chiller	44
YCWL / YCRL Water-cooled or remote air-cooled scroll compressor chiller	46
YLCS Remote Air-Cooled and Heat Pump screw compressor	52
YVWH Premium-Efficiency VSD water-cooled screw chiller NEW	54
YVWA Water-cooled VSD screw chiller	58
YZ Magnetic bearing centrifugal chiller	62
YMC ² Water-cooled magnetic centrifugal chiller	66
YK Water-cooled centrifugal chiller	68
YORK Absorption chillers and heat pumps	70
The 2-step cycle in YORK Absorption chillers	72
YHAU CL/CH Single effect hot water driven absorption chiller	74
YHAU CL/CH DXS Single effect double lift hot water driven absorption chiller	76
WFC SC Single stage hot water absorption chiller	79
Central Plant Optimization 10	80
Smart Connected Chillers Services	82
Heat Pump Solutions	84
HVAC Fundamentals	88
Ecodesign Label Regulation	94

Air Handling Systems & Terminal Devices

YMA Custom air handling units	104
YMB / YPS Modular Air Handling Units	106
YBV "Plug and Play" Air Handling Units	110
YFCN Fan Coil Unit with centrifugal fan	114
YFCN-ECM Inverter Fan Coil Unit with centrifugal fan	116
LASER & LOW BODY Fan Coil Units	124
LASER ECM & LOW BODY ECM Inverter Fan Coil Units	132
YHPL High static pressure blower / YHPL-ECM Inverter high static pressure blower NEW	134
RFHP-O High static pressure blower / RFHPO-ECM Inverter high static pressure blower NEW	140
YEFB High static pressure blower / YEFB-ECM Inverter high static pressure blower NEW	144
YKEY and YKEY900 Hydro Cassette / YKEY-ECM and YKEY900-ECM Inverter Cassette NEW	150
YHK Hydro Cassette / YHK-ECM Inverter Hydro Cassette	156
YHVP Hydro High Wall / YHVP-ECM Inverter Hydro High Wall	162
RVP-C Series Circular VAV Terminal Boxes NEW	166
RVP-P Series Rectangular VAV Terminal Boxes NEW	168
YEPR Heat Recovery Units	172
YORK YC-P Series Close Control Air Conditioners	176
YORK YC-G Series Close Control Air Conditioners	186
YORK YC-R Series Close Control Air Conditioners	188
Factory fitted controls	190

Rooftop Equipment

ACTIVA Rooftop ARC-ARG-ARH-ARD 017 to 040 AB / BB	198
ACTIVA Rooftop ARC-ARG-ARH-ARD 045 to 090 BB	202
Large ACTIVA Rooftop ARC-ARH 100 to 175 AB	208
VITALITY Split Rooftop VIRSAC-VIRSAH 20 to 90 AB	214

Comprehensive Solutions

Verasys Configurable building controls system for smarter buildings	222
Metasys Building Automation and Control Systems	224
Lifecycle Services	226

* AHRI CERTIFICATION PROGRAM

YORK chillers have been tested and certified by Air-Conditioning, Heating and Refrigeration Institute (AHRI) in accordance with the latest edition of AHRI Standard 551/591 (S-I). Under this Certification Program, chillers are regularly tested in strict compliance with this Standard. This provides an independent, third-party verification of chiller performance. Refer to the AHRI site at: http://www.ahrinet.org/water_chilling+packages+using+vap+or+compression+cycle+water_cooled.aspx for complete Program Scope, Inclusions, and Exclusions as some options listed herein fall outside the scope of the AHRI certification program. For verification of certification, go to the AHRI Directory at www.ahridirectory.org.



Chillers & Heat Pumps

Scroll Compressor Chillers and Heat Pumps

Screw Compressor Chillers Air-Cooled & Water-Cooled

Centrifugal Compressor Chillers Water-Cooled

Absorption Chillers and Heat Pumps

Central Plant Optimisation 10

AMICHI-S Series

Air cooled Scroll DC Inverter reversible heat pump

YVAG 012 to 018

A complete range from 11.2 kW up to 17.8 kW



Perfect Comfort in a Wide Operating Range

Wide operating envelope with lower sound levels


With the wide operating range, **YORK AMICHI-S** is perfect for all climates. It does not matter if the ambient temperature in summer is 48°C or if in winter is -20°C, as the unit will maintain the efficiency in stable operation, to provide users with the most comfortable air conditioning experience. With the heating outlet water temperatures up to 52°C, the unit is perfect for radiant panels.

Easy Installation & Operation

Modular concept

The small packaged **YORK AMICHI-S** heat pump comes as standards with a hydronic loop circulating pump, water flow switch, safety valve, fill valve and wye-strainer, saving space in the room and making installations easy and fast. The pumps can provide up to 150kPa available static pressure.

The units are designed for modular installations (up to 4 module combinations among all the models) to meet the needs of different residential and light commercial building demands. This permits installed capacities from 11.2-72 kW.



High Efficiency

Providing the lowest possible operating costs

Our new **YORK AMICHI-S** is designed for real world efficiency. Part load performances meet the highest efficiency values and delivers performance beyond typical heat pump efficiency levels in cooling and heating. The new reversible heat pumps exceed the requirements for the Ecodesign regulations for Heat Pumps through an optimized combination of YORK efficiency-enhancing technologies.

YORK AMICHI-S uses high efficiency DC inverter compressor together with advanced variable frequency drive technology which ensures stable operation across the entire operating range. Compressor frequency range goes from 15 ~ 120%, to quickly and efficiently meet the needs of residential load changes. **YORK AMICHI-S** units not only uses a high efficiency DC inverter compressor, but also dual fans equipped with high efficiency, low noise DC inverter motor which adjusts the air flow to exactly match the capacity in a more accurate and efficient way.


Low Sound Optimized

Thanks to the **YORK AMICHI-S** component design, the unit sound emissions are as low as 54 dB(A) Sound Pressure at full load, reducing to as low as 40 dB(A) at part load operation.

YORK AMICHI-S also has Silent Mode available, which reduces the sound level emissions by 5 dB(A) below full load levels.

Exactly control at real time

YORK AMICHI-S unit comes with RS485 interface, through the Modbus protocol, together with easy access and user-friendly real-time control. New control solution has been developed for a quick and easy installation in a domestic application.

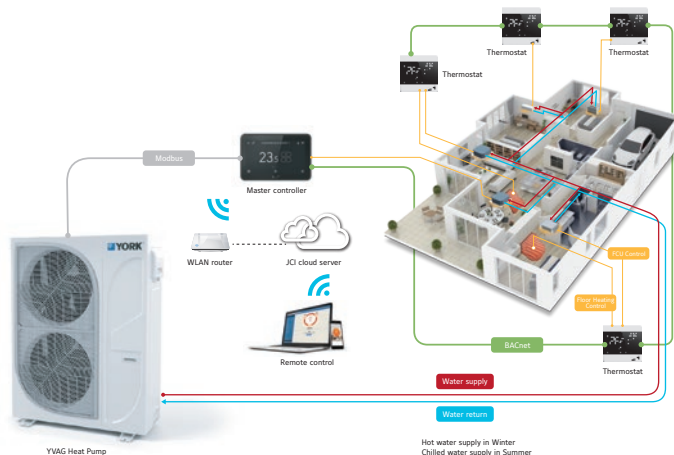

Air cooled Scroll DC Inverter reversible heat pump

YVAG 012 to 018



Technical features

Model			YVAG012	YVAG014	YVAG016	YVAG018
Performance	Nominal Cooling Capacity	kW	11.18	14.26	15.95	17.8
	Cooling Power Input	kW	4.01	5.28	5.74	6.95
	EER		2.79	2.70	2.78	2.56
	SEER		4.05	4.32	4.52	4.42
	$\eta_{s,c}$		159	170	178	174
	Nominal Heating Capacity	kW	10.94	13.11	15.41	18.46
	Heating Power Input	kW	3.65	4.28	4.68	6.28
	COP		3	3.06	3.29	2.94
	SCOP		3.51	3.58	4.07	3.94
	$\eta_{s,h}$		136	139	158	153
Refrigerant	Sound Power Level	dB(A)	68	70	70	74
	Refrigerant charge R410A	kg	2.8	3.3	4.0	4.0
Compressor	Type		Scroll DC Inverter			
	Quantity	#	1	1	1	1
Air side heat exchanger	Fan motor type		Brushless DC Fan Motor			
	Fans quantity	#	2	2	2	2
	Airflow	m³/h	2500 ~ 6600	2500 ~ 6600	2500 ~ 6600	2500 ~ 6600
	Working ambient temperature cooling mode		-5 ~ 48°C			
	Working ambient temperature heating mode		-20 ~ 25°C			
Water side heat exchanger	Type		Brazen Plate Heat Exchanger			
	Pump Type		Multiple-stage centrifugal pump			
	Nominal water flow	m³/h	1.9	2.4	2.7	3.1
	Unit external head	kPa	150	130	120	110
	Working range water leaving temp. cooling		5 ~ 15°C			
	Working range water leaving temp. heating		30 ~ 52°C			
Dimensions & Weight	Height	mm	995			
	Width	mm	360			
	Depth	mm	1320			
	Operating weight	kg	126	128	141	141
Electrical	Power supply	V/ph/Hz	230V/1ph/50Hz			

Net values at Eurovent nominal conditions:


Cooling capacities in kW given for 12/7°C water leaving temperature Δt 5°C and 35°C ambient temperature.

Heating capacities in kW given for 40/45°C water leaving temperature and 7°C ambient temperature.

Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.

Dimensions and hydraulic connections

YVAG 012 to 018

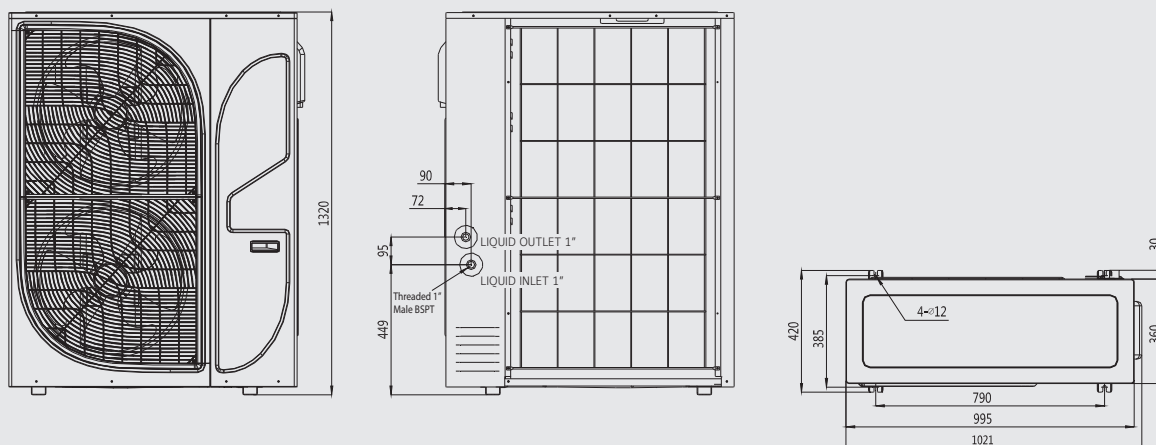

All dimensions in mm. Drawings not in scale.



Manufacturer reserves the rights to change specifications without prior notice.

AMICHI Series

Air cooled Scroll DC Inverter chiller and heat pump

YMAA 045 to 260 / YMPA 045 to 260

A complete range from 44 kW up to 254 kW



Exceeding Efficiency Standards

The YORK AMICHI Series Air-cooled DC Inverter Scroll Chiller and Heat Pump have been designed to meet tomorrow's efficiency standards today. Delivering performance beyond typical chiller and heat pump efficiency levels, the YORK AMICHI Series meets or exceeds stringent regulatory requirements (see chart, below) through an optimized combination of YORK efficiency enhancing technologies.


ECODESIGN REGULATIONS CATEGORY:	EFFICIENCY METRIC:	TOMORROW'S STANDARDS MET TODAY:
Comfort Heating	SCOP/ηsh	AMICHI Heat Pump: Sept. 2017 Compliant (Tier 2)
Comfort Cooling	SEER/ηsc	AMICHI Chiller: Jan. 2021 Compliant (Tier 2)
Process Cooling (Med. Temp.)	SEPR	AMICHI Chiller: July 2018 Compliant (Tier 2)
Process Cooling (High Temp.)	SEPR	AMICHI Chiller: Jan. 2021 Compliant (Tier 2)

Performance Without Compromise

The YORK AMICHI Series is a no-compromise solution for a variety of climates and locations. It can maintain efficiency in a variety of conditions without kits or add-ons (down to -18°C ambient in cooling mode and -15°C ambient in heating mode). With the smallest footprint across the widest capacity range on the market, the YORK AMICHI Series is also the perfect solution for high performance in smaller spaces. Our systems offer two levels of sound performance. If requirements call for sound attenuation beyond our standard low-noise levels, an optional Ultra Quiet Kit can further reduce sound power by 6 dBA, providing one of the quietest units available.

Greater design flexibility

- 9 package models or modular combinations
- Controls can be parent/child controller if application requires
- Maximum of 32 units below 130 kW
- Maximum of 16 units above 130 kW

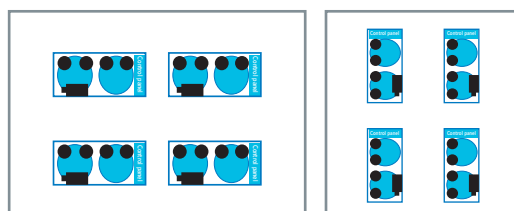

Air cooled Scroll DC Inverter chiller and heat pump

YMAA 045 to 260 / YMPA 045 to 260



Technical features

Model			YMAA / YMPA								
			45	65	80	100	130	160	200	230	260
Performance	Cooling capacity c/o units	kW	44	60	78	99	122	159	188	221	254
	EER		2.86	2.79	3.11	3.00	2.95	3.12	3.04	3.08	3.06
	SEER		4.38	4.50	4.43	4.24	4.42	4.24	4.28	4.17	4.34
	ηs,c		172	177	174	167	174	167	168	164	171
	Cooling capacity h/p units	kW	44	60	78	99	122	159	188	221	254
	Heating capacity h/p units	kW	50	61	87	99	132	161	191	231	256
	COP		2.85	2.85	3.06	2.98	2.75	3.08	3.03	3.04	3.03
	SCOP		3.42	3.40	3.38	3.39	3.43	3.56	3.55	3.38	3.40
	ηs,h		133	132	131	132	133	138	138	131	132
	Sound power level STD / LN (cooling)	dB(A)	79/75	83/78	82/78	84/79	85/81	87/82	88/83	88/83	89/84
Refrigerant	Refrigerant circuits	#	1	1	2	2	2	3	3	4	4
	Refrigerant charge (R410A)	kg	9.5	12.3	17.6	20.5	22.8	29.5	32	43.3	46
Compressor	Type		DC Scroll Inverter + Scroll								
	Capacity steps	%	Stepless (Inverter)								
	Quantity		2	2	3	3	4	5	6	7	8
Air side heat exchanger	Fan motor type		EC motor								
	Fans quantity		1	1	2	2	2	3	3	4	4
	Working ambient temp. cooling mode		-18 ~ 48℃								
	Working ambient temp. heat. mode		-15 ~ 25℃								
Water side heat exchanger	Type		Plate Heat Exchanger								
	Unit water volume (w/o pump kit)	l	9	10	11	14	15	27	29	32	34
	Pump Type		Fixed / Variable Speed Drive Pump					Variable Speed Drive Pump			
	Nominal water flow	l/s	2.1	2.9	3.7	4.7	5.8	7.4	9.1	10.5	11.9
	Pressure drop (cooling)	kPa	32	25	27	30	36	25	32	41	38
	Working range water leaving temp. cooling		-8 ~ 20℃								
	Working range water leaving temp. heating		25 ~ 55℃								
Dimensions & Weight	Height (w/o pump kit)	mm	2440					2500			
	Width (w/o pump kit)	mm	1200					3050			
	Depth (w/o pump kit)	mm	1500			2240					
	Operating weight (w/o pump kit)	kg	575	598	875	901	979	1922	2003	2235	2316

YMAA: Cooling only units models. YMPA: Air to water heat pump models.

Net values at Eurovent nominal conditions:

Cooling capacities in kW given for 7°C water leaving temperature Δt 5°C and 35°C ambient temperature

Heating capacities in kW given for 45°C water leaving temperature and 7°C ambient temperature

SEER and SCOP calculated according to EN14511 and EN14825


ηs calculated according to Ecodesign regulation for chillers comfort cooling and heating (813/2013, 2016/2281)

Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects

Advanced Control Made Easy


To help maximize efficiency and keep you in control, the YORK AMICHI Series comes standard with integrated Smart Equipment. This technology allows the equipment to connect seamlessly to building controls like our world-class Verasys system, where smart-enabled equipment can self-identify and interoperate.

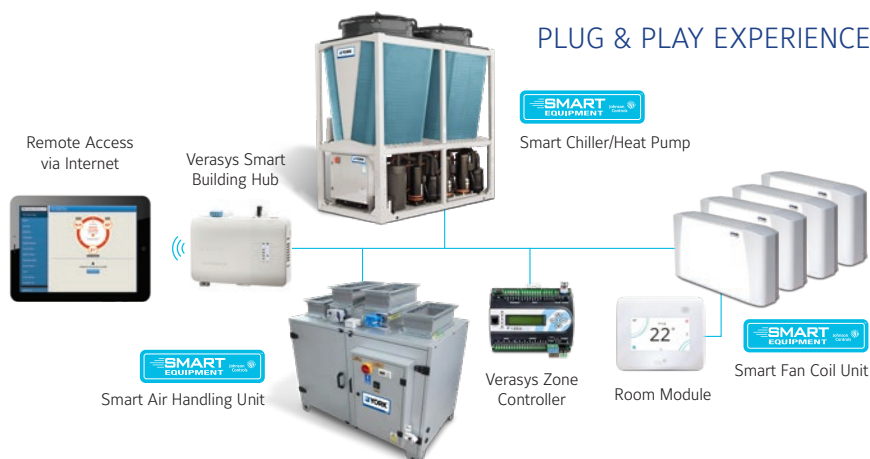

Manufacturer reserves the rights to change specifications without prior notice.


Dimensions and hydraulic connections

YMAA-YMPA 045 and 065 Single unit

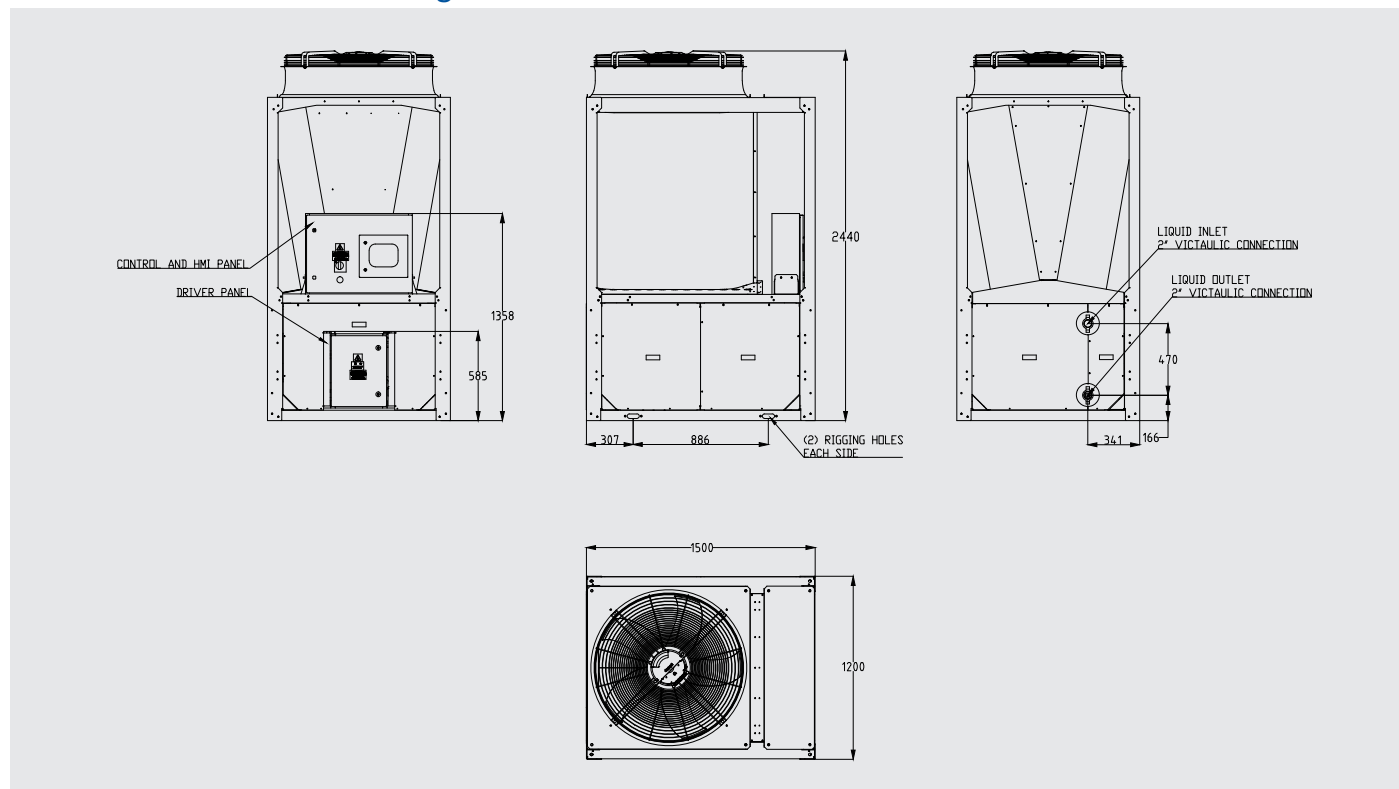

All dimensions in mm. Drawings not in scale.

YMAA-YMPA 080 to 130 Single unit

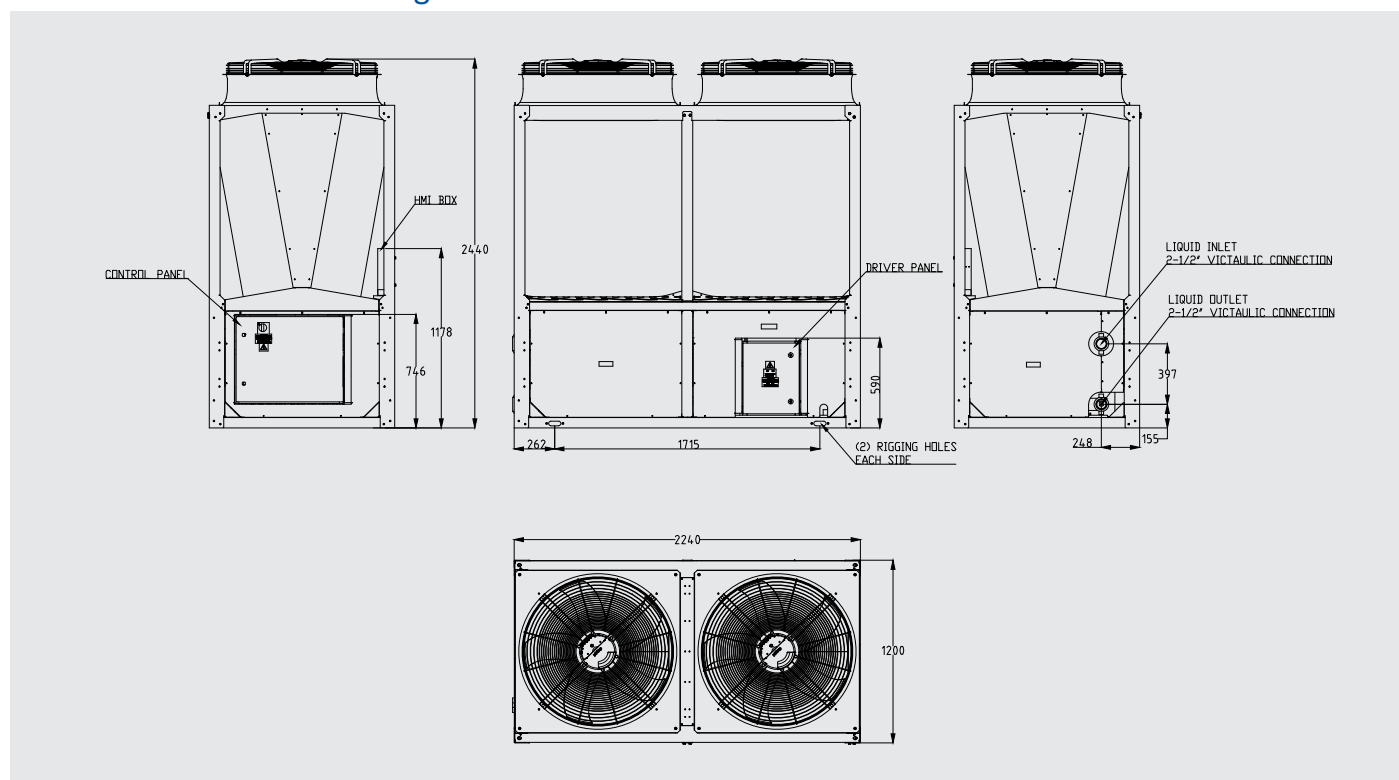


All dimensions in mm. Drawings not in scale.

YMAA 045 to 260 / YMPA 045 to 260




YMAA-YMPA 160 and 200 Single unit

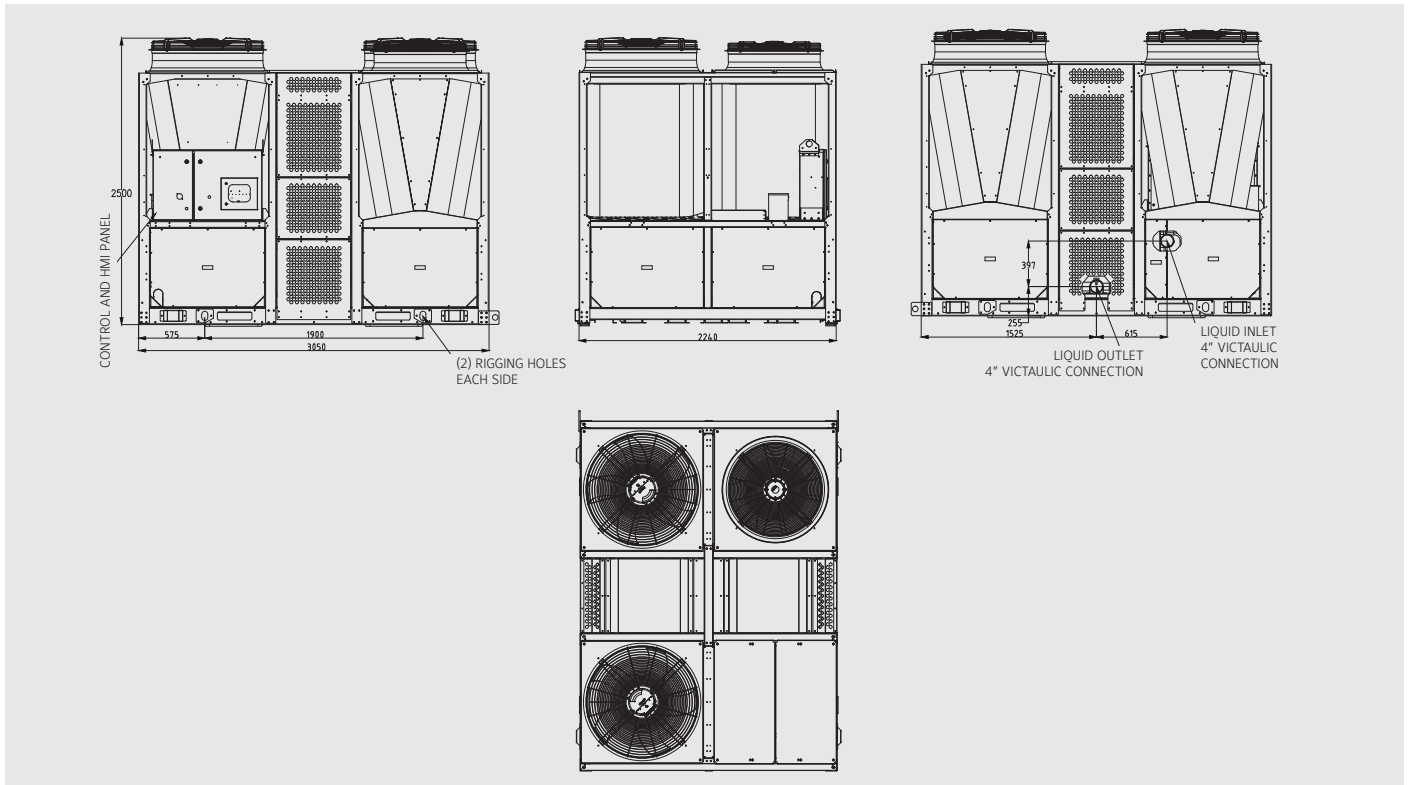

All dimensions in mm. Drawings not in scale.

YMAA-YMPA 230 and 260 Single unit

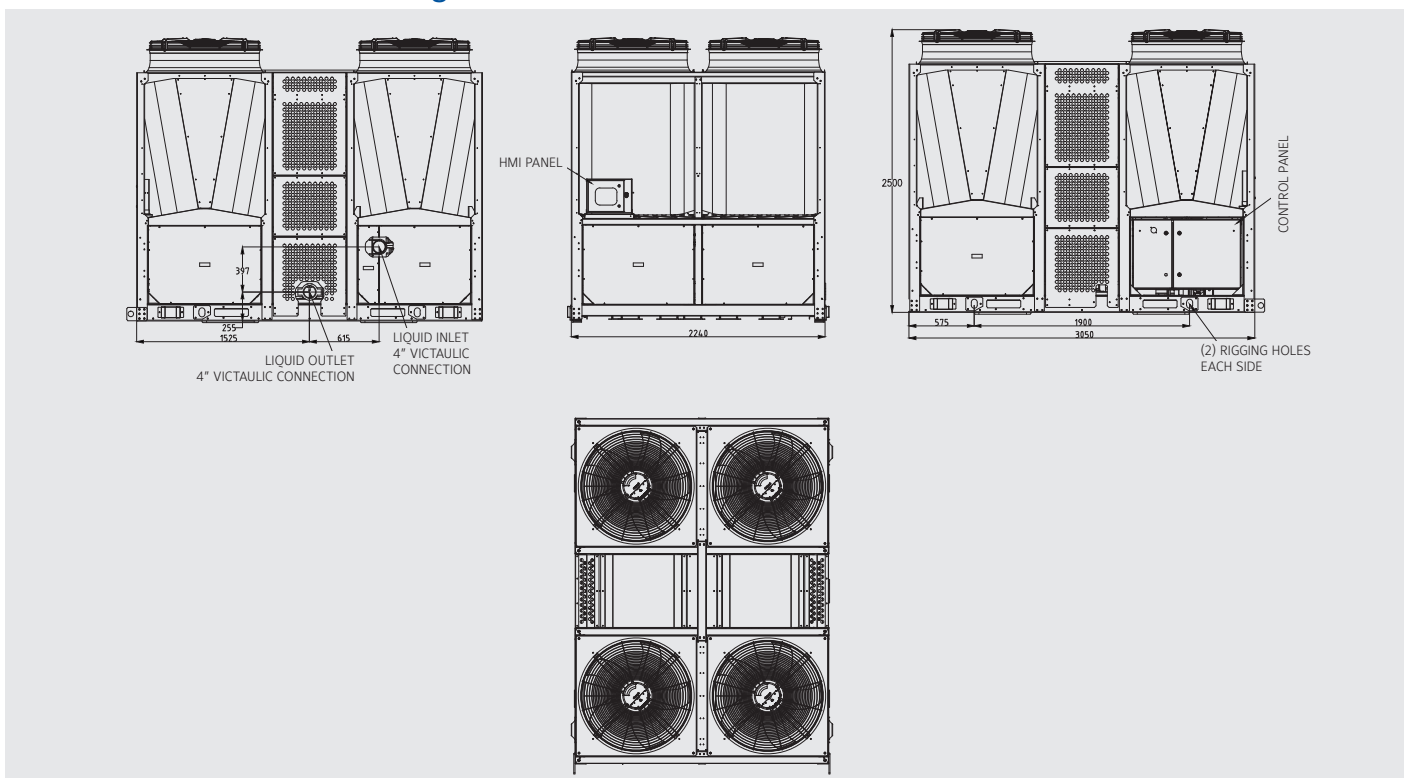


All dimensions in mm. Drawings not in scale.

YCME / YHME Series 2

Modular screw chillers and heat pumps

YCME/YHME 0162HE to 0222HE
A complete range from 160 kW up to 224 kW



Modular concept

Provide flexibility

Up to 8 modules in one water system brings important benefits.

Achieve reliability

Full redundancy – Safety first. Should a module fail, the remaining modules maintain operational continuity.

Example of module configurations




Fully configurable units

Increase the versatility


Up to 60 different options and accessories make our chiller as unique as the project needs.

Some of the most interesting are:

Sound attenuation
compressor enclosure



Dual pump option



Heat recovery option



Modular screw chillers and heat pumps

YCME/YHME 0162HE to 0222HE



YCME Air-cooled Chiller Performance Data

Individual modules		YCME0162HE	YCME0182HE	YCME0202HE	YCME0222HE
Cooling capacity	kW	159.6	179.6	204.5	224.4
Total power input	kW	51.32	57.75	65.34	71.01
SEER		4.11	4.13	4.12	4.12
η_s, c		161	162	162	162
Sound power level	dB(A)	96	97	98	99
Dimensions (H x W x D)	mm	2450 x 1955 x 2290		2450 x 1955 x 3230	
Operating weight	kg	1300	1340	1590	1680
Chilled Water Outlet (std, options Low / High)	°C	+5°C ~ +15°C, with Options -10°C ~ +5°C / +15°C ~ +30°C			
Ambient Air Temperature	°C	-15°C ~ +46°C			
Electrical Power Supply		3N - 400V 50Hz			

YHME Air-cooled Heat Pump Performance Data

Individual modules		YHME0162HE	YHME0182HE	YHME0202HE	YHME0222HE
Cooling capacity	kW	149.7	169.6	194.6	209.5
Total power input	kW	51.09	57.88	65.97	70.3
Heating capacity	kW	145.4	145.4	185.5	185.5
Total power input	kW	51.56	51.56	65.32	65.32
SCOP		Meet Ecodesign requirements			
η_s, h		Meet Ecodesign requirements			
Sound power level	dB(A)	96	97	98	99
Dimensions (H x W x D)	mm	2450 x 1955 x 2290		2450 x 1955 x 3230	
Operating weight	kg	1400	1420	1680	1760
Chilled Water Outlet (std, options Low / High)	°C	+5°C ~ +15°C, with Options -10°C ~ +5°C / +15°C ~ +30°C			
Heated Water Outlet	°C	+35°C ~ +55°C			
Ambient Air Temperature (Cool / Heat)	°C	-15°C ~ 46°C / -9.5 (DB), -10 (WB) ~ +21 (DB), +15.5 (WB)			
Electrical Power Supply		3N - 400V 50Hz			

Net values at Eurovent nominal conditions:

Cooling capacities in kW given for 7°C water leaving temperature Δt 5°C and 35°C ambient temperature.

Heating capacities in kW given for 45°C water leaving temperature and 7°C ambient temperature.

Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.

Sound Pressure: measured at 1.5m height, and at 1m distance from the control panel.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.



Widest operating range at highest efficiency

YCME/YHME Cooling operating range

Chilled water outlet temperature: -10°C to +30°C


Ambient temperature: -15°C to +46°C

YHME Heating operating range

Hot water outlet temperature: +35°C to +55°C

Ambient temperature: -10°C (WB) to +15.5°C (WB)


Two operating modes selectable at commissioning allow the installation's performance to focus on either high efficiency or high accuracy outlet water temperature.

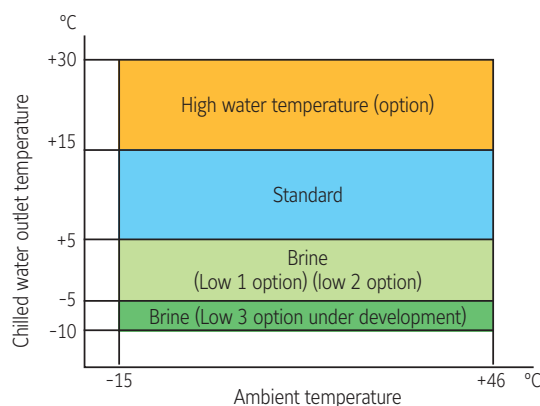

Manufacturer reserves the rights to change specifications without prior notice.

Dimensions and hydraulic connections

YCME/YHME 0162-0182

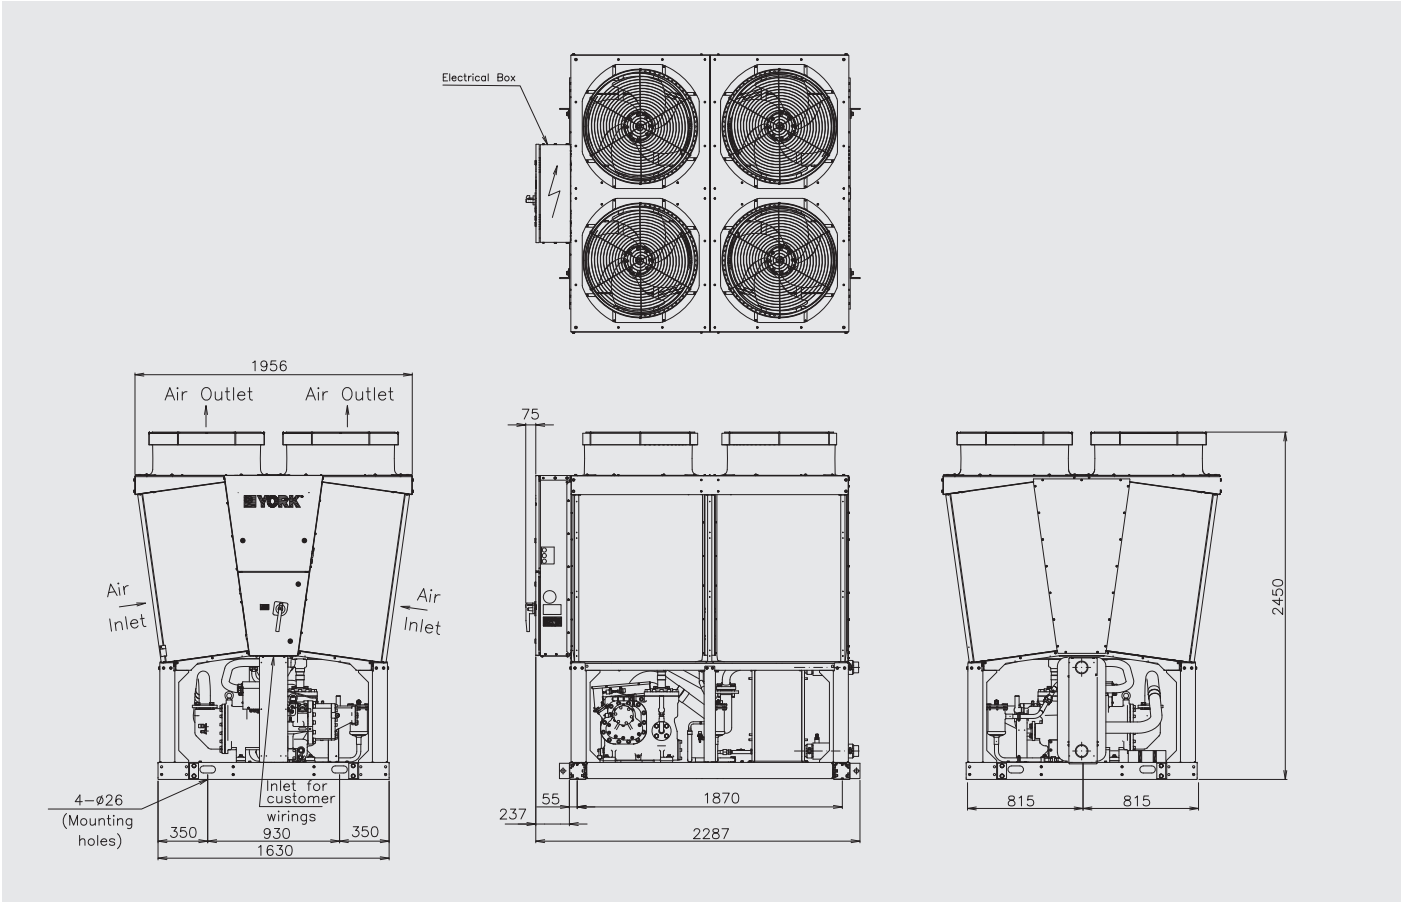


All dimensions in mm. Drawings not in scale.

Size	Hydraulic connections
YCME/YHME 0162-0182	2" 1/2 Victaulic Ø 76.1 mm

YCME/YHME 0162HE to 0222HE



YCME/YHME 0202-0222

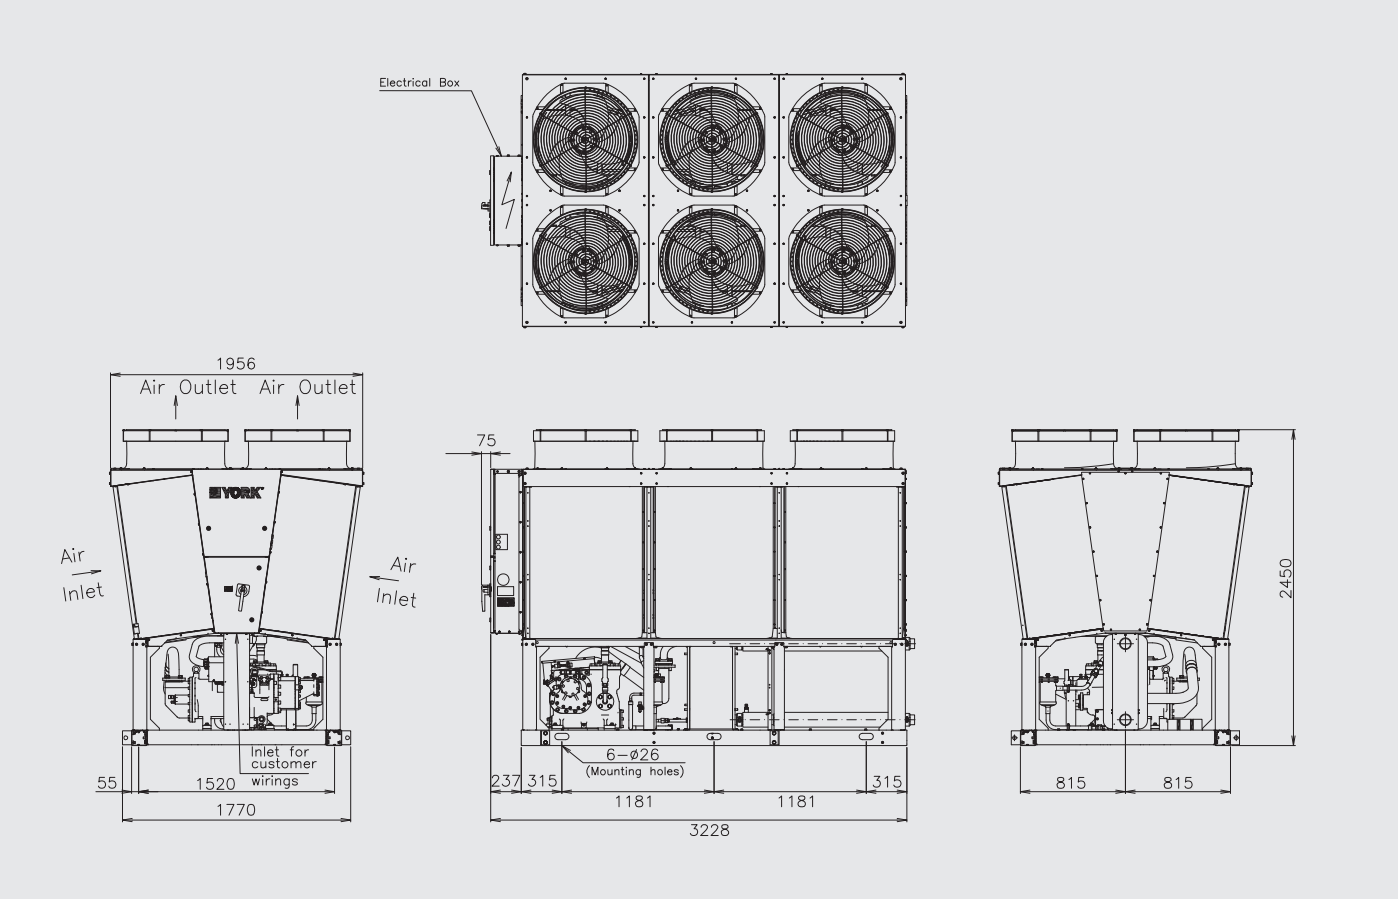

All dimensions in mm. Drawings not in scale.

Size	Hydraulic connections
YCME/YHME 0202-0222	2" 1/2 Victaulic Ø 76.1 mm

YLAA

Air-cooled scroll compressor chiller

Cooling capacities from 198 kW to 524 kW



Features


The **YORK YLAA TEMPO** air-cooled chiller is an environmental leader.

Utilising scroll type compressors and microchannel condenser coil technology the **YLAA** delivers premium efficiency for all air conditioning applications.


YLAA chillers are a self-contained cooling solution that is light-weight and compact for convenient installation on the ground or on building rooftops.

Options / Accessories

- Soft start
- Power Factor Correction Capacitors
- Low ambient kit
- BMS Interfacing options
- Dual pressure relief valves
- Victaulic coupling
- Flow switch
- Heat recovery option
- Enclosure options
- Sound attenuation options
- Anti-vibration mounts options
- Hydrokits with single and dual pump
- Epoxy Post-coated Dipped Microchannel Coils
- VSD Fans

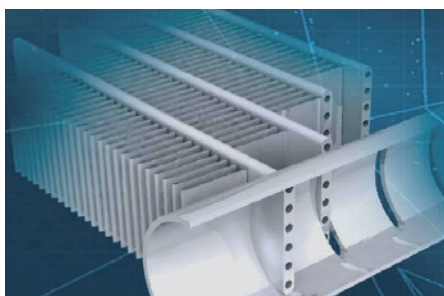


The TEMPO delivers energy efficiency levels that surpasses Eurovent A Class requirements. Aluminium microchannel condenser coil technology is one reason for this premium efficiencies.

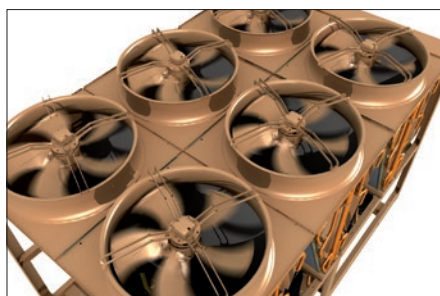

Ultra quiet operation can be obtained through optional dual or low speed fans and a compressor accousitic enclosure.

A single point power connection and optional, factory packaged water pumps, water filter and flow switch provide fast and easy installation.

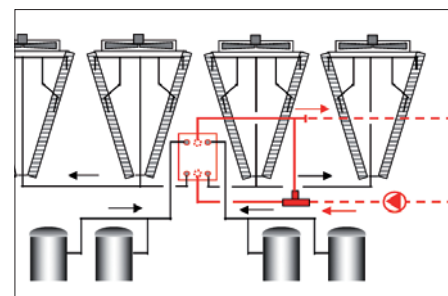

An optional heat recovery feature can be added to provide hot water to 50°C; which is useful for facility heating or hot water preheating.

Air-cooled scroll compressor chiller

YLAA 0195 to 0517



Nominal capacity

YLAA	0195	0221	0262	0286	0301	0350	0392	0442 *	0457 *	0517
Cooling capacity (kW)	198	211	244	273	297	348	380	431	457	524
EER	3.13	3.20	3.03	2.60	2.97	2.97	2.93	2.91	2.89	2.89
SEER	4.23	4.17	4.05	3.86	4.02	3.90	4.27	4.35	4.02	4.14
$\eta_{s,c}$	166	164	159	151	158	153	168	171	170	163
Sound power level dB(A)	87	87	87	89	90	91	91	94	95	92

Net values at Eurovent nominal conditions:

Cooling capacities in kW given for 7°C water leaving temperature Δt 5°C and 35°C ambient temperature

Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.

(*) Low noise version fits Ultra Quiet Fans and compressor acoustic enclosures

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects


Technical data

YLAA			0195	0221	0262	0286	0301	0350	0392	0442	0457	0517
Dimensions	Length	mm	2911				3690				4807	
	Width	mm	2242								2254	
	Height	mm	2508									
Operating weight kg			1706	1721	1852	1853	2170	2339	2508	3343	3481	3615

YLAA Pump Kit

- Two option levels – basic and full featured – for maximum flexibility
- More impeller size options for better match to customer requirements

- New, smaller pump motors suitable for primary-secondary systems

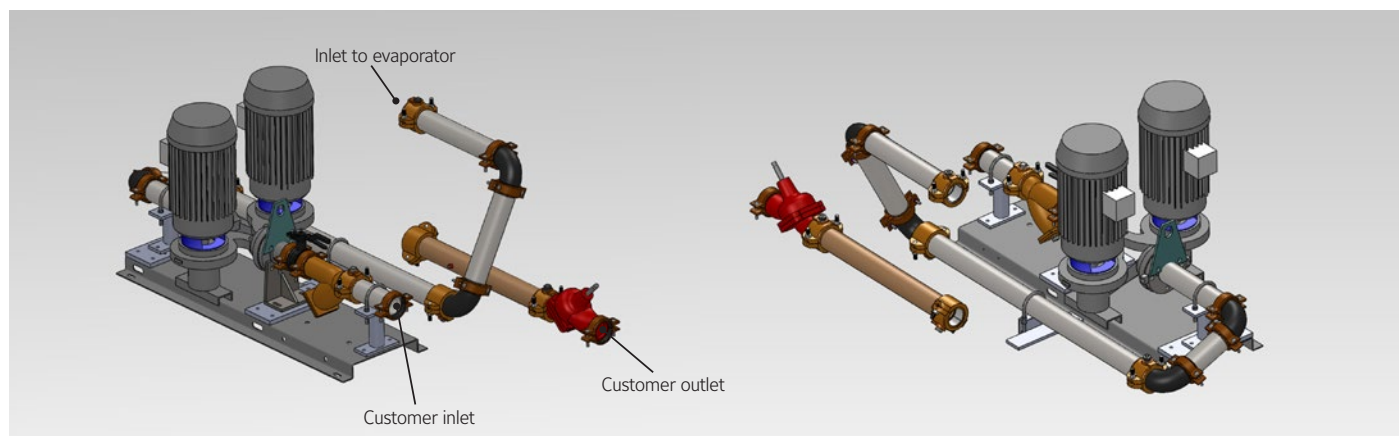

YORK YLAA Scroll with Low GWP R454B

Cooling capacity: 190–530 kW

GWP: 467 (AR5)

- 75% lower than R410A
- 30% lower than R32

Expected performances (TBC)


- 1.5% reduction in capacity vs R410A
- 2-3% improvement in FL COP vs R410A
- 1-2% reduction in PL SEER vs R410A



Manufacturer reserves the rights to change specifications without prior notice.


Dimensions and hydraulic connections

YLAA 0195, 0221 & 0262

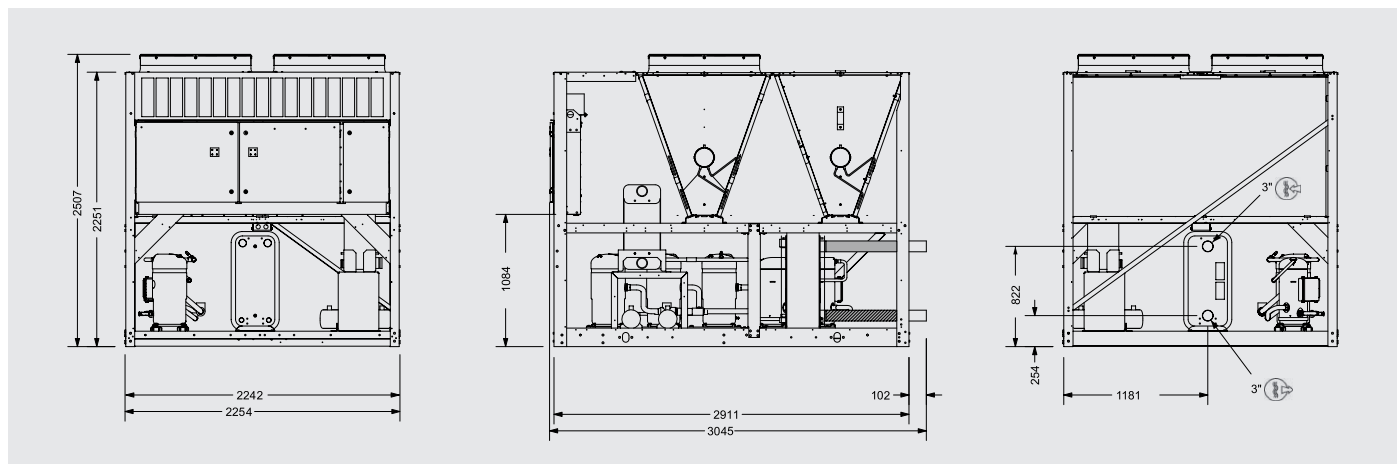

All dimensions in mm. Drawings not in scale.

YLAA 0301 & 0392

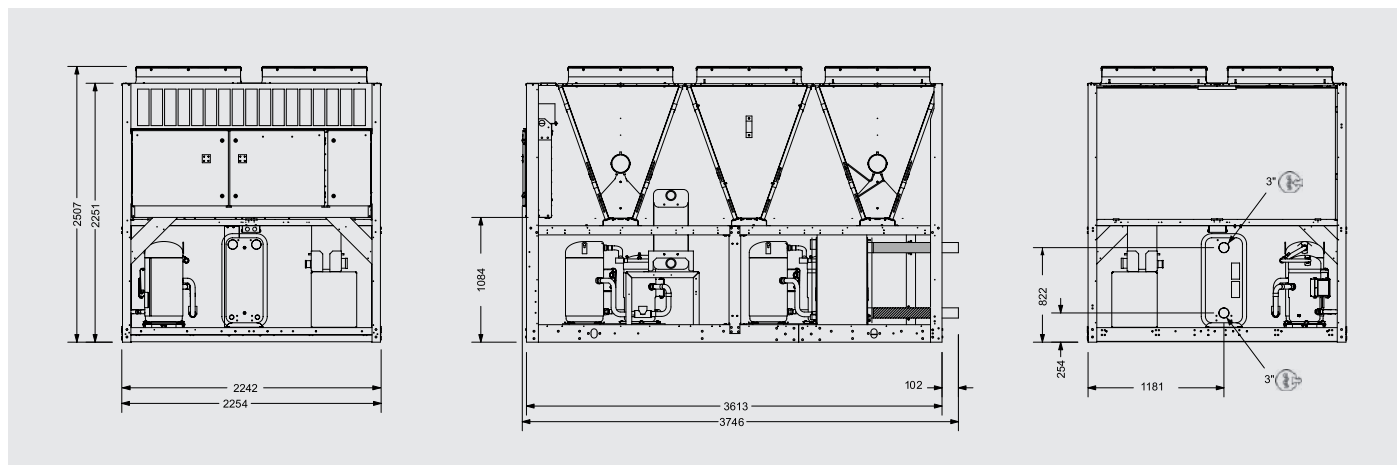


All dimensions in mm. Drawings not in scale.

YLAA 0195 to 0517




YLAA 0442

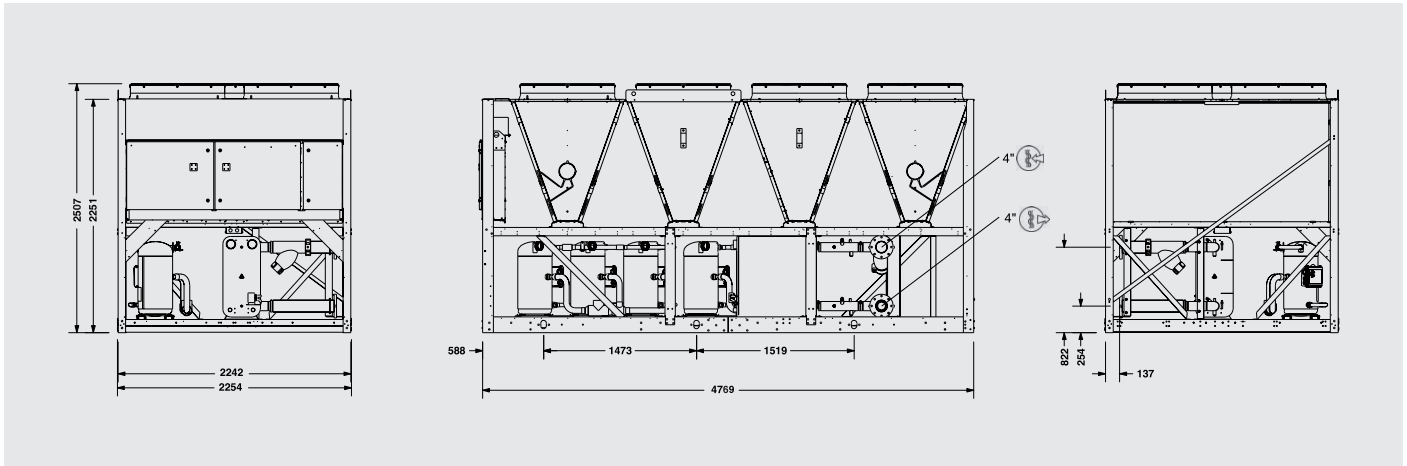

All dimensions in mm. Drawings not in scale.

YLAA 0457 & 0517

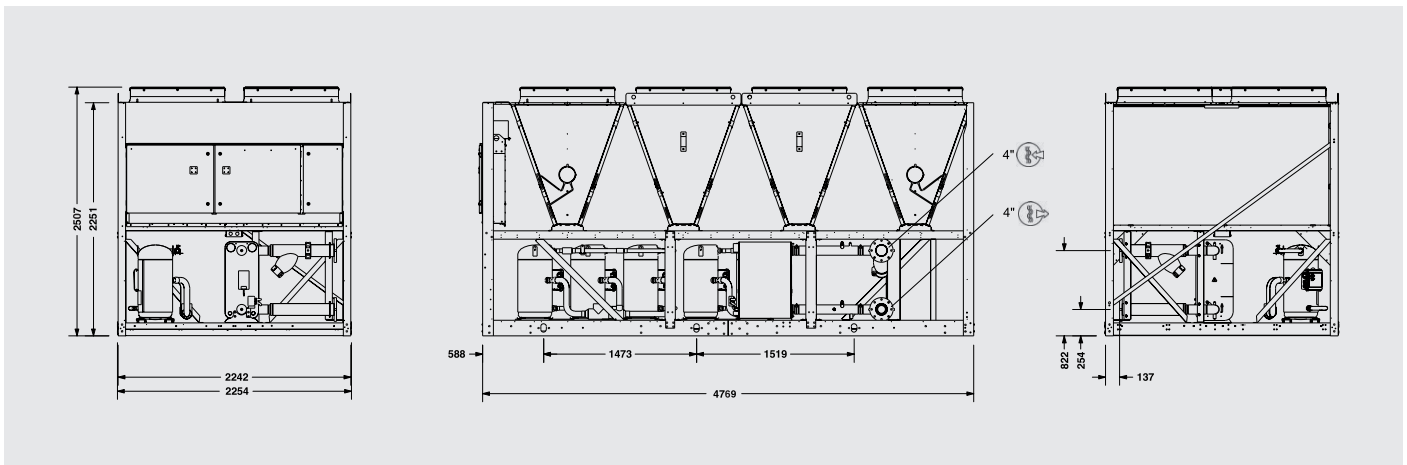

All dimensions in mm. Drawings not in scale.

YLPB

Heat pump scroll compressor

Cooling capacities from 335 kW to 629 kW

Heating capacities from 345 kW to 655 kW



Features

The **YLPB** heat pump delivers premium energy efficiency, it is easy to install, quiet to run, and it is supported by a knowledgeable service force.

Efficiency

One of the highest part load cooling efficiency unit in the market, improved defrost cycle, extended operating envelope. Maximize heating efficiency and renewable energy use with the **YLPB** heat pump.

Sound

Designed for quiet operation at full and part load conditions.

Ease of installation

Quick and easy to install, compact design. Smart Equipment and Verasys ready.

Reliability

The **YLPB** is our third generation of fully factory tested scroll heat pumps, and thanks to our extensive service solutions, support and minimal maintenance are assured.

Options / Accessories

- Soft start
- Power Factor Correction Capacitors
- BMS Interfacing options
- Dual pressure relief valves
- Victaulic coupling
- Flow switch
- Desuperheater
- Enclosure options
- Sound attenuation options
- Anti-vibration mounts options
- VSD Single and Dual Pump Kits



Multiple scroll design enables sound reduction during part load operation by simply turning off unnecessary compressors

Heat pump scroll compressor

YLPB 0345 to 0650



Nominal capacity

YLPB	0345	0430	0525	0575	0650
Cooling capacity (kW)	335	413	478	558	629
EER	3.00	2.93	2.90	2.95	3.06
Heating capacity (kW)	345	429	515	577	655
COP	3.07	3.07	3.03	2.99	3.01
SCOP	3.25	3.25	3.25	3.25	3.25
η_s , h	127	127	127	127	127
Sound Power Level (dBA)	96	95	97	98	99

Net values at Eurovent nominal conditions:

Cooling capacities in kW given for 7°C water leaving temperature Δt 5°C and 35°C ambient temperature

Heating capacities in kW given for 45°C water leaving temperature and 7°C ambient temperature

SCOP calculated according to EN14511 and EN14825

η_s calculated according to Ecodesign regulation for heating (813/2013)


Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.


Technical data

YLPB	0345	0430	0525	0575	0650
Dimensions	Length	mm	4721	5839	6958
	Width	mm	2242		
	Height	mm	2391		
Operating weight kg	3793	4043	4210	4747	5495

High Efficiency Cooling Mode

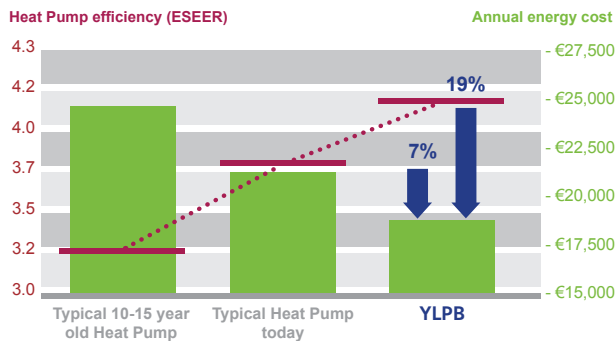


Additional Energy Savings in Heating Mode

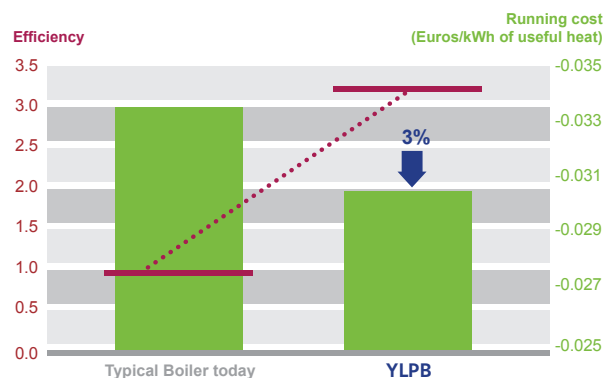

Energy Rate: Electricity 0.1 EUR / kWh; Gas 0.03 EUR / kWh


Carbon footprint in Heating Mode

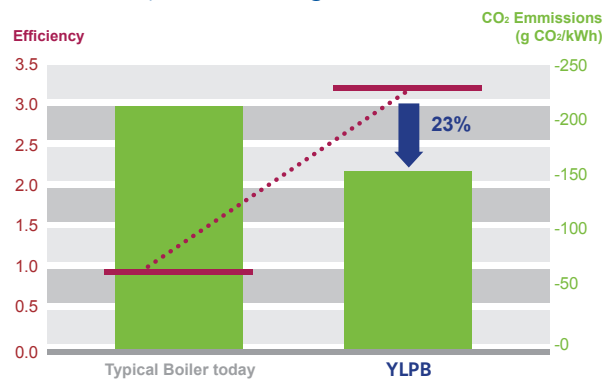

Manufacturer reserves the rights to change specifications without prior notice.


Dimensions and hydraulic connections

YLPB 0345 & 0430

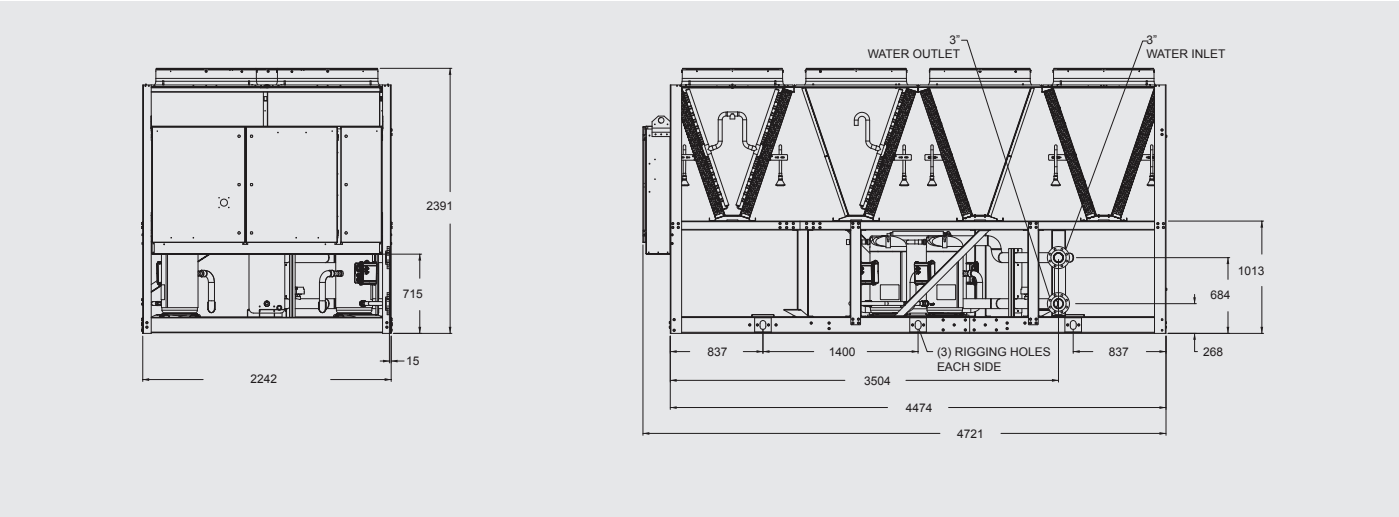

All dimensions in mm. Drawings not in scale.

YLPB 0525

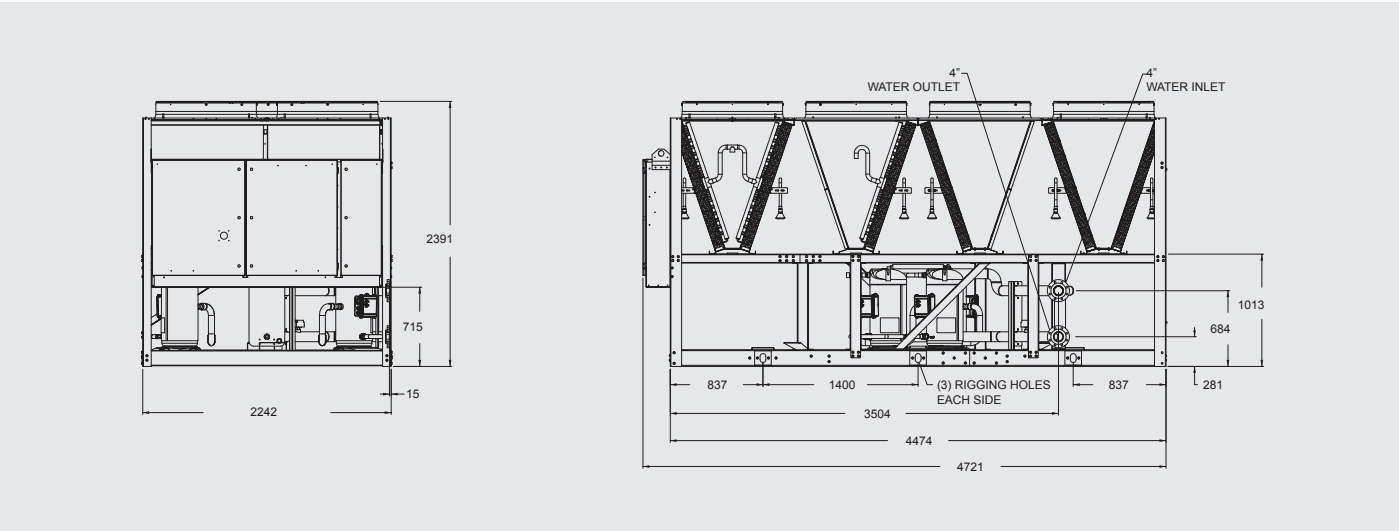


All dimensions in mm. Drawings not in scale.

YLPB 0345 to 0650




YLPB 0575

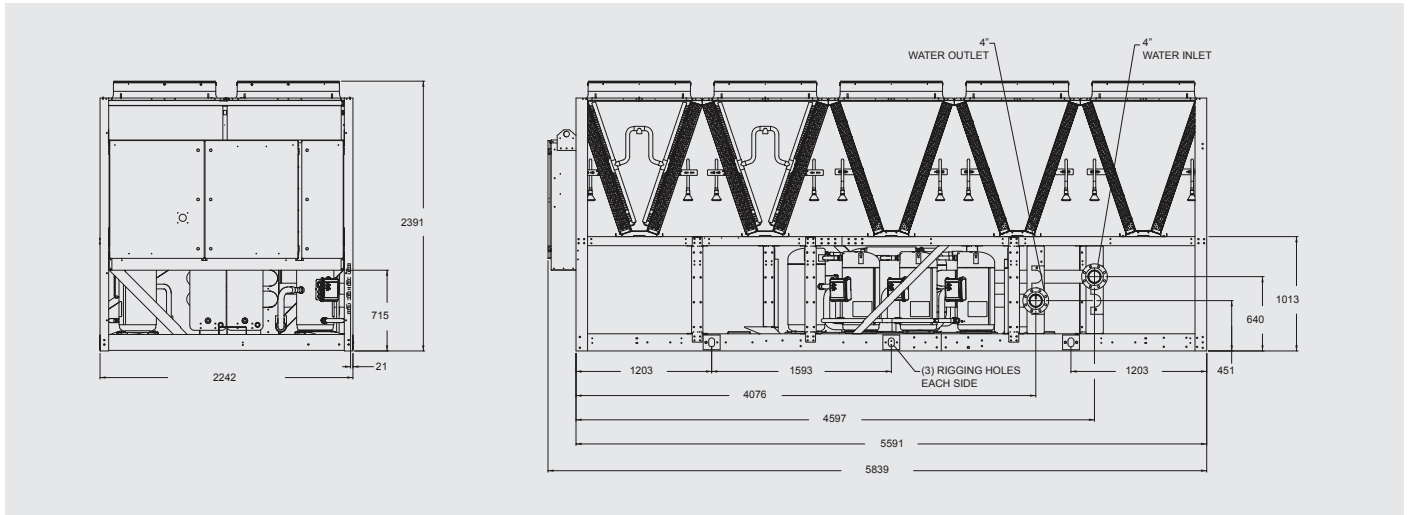

All dimensions in mm. Drawings not in scale.

YLPB 0650

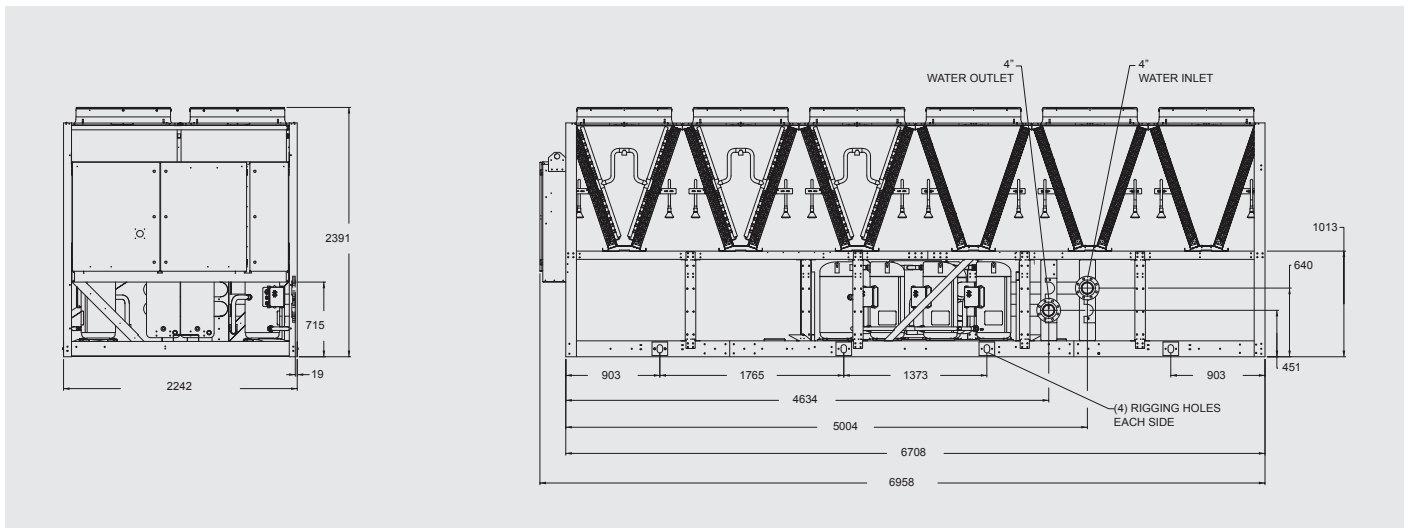

All dimensions in mm. Drawings not in scale.

YVAA

Air-cooled VSD screw chiller

Cooling capacities from 569 kW to 1654 kW



Note: this picture is showing aesthetics enclosures, contact your York office for additional information



Compatible range




Features

- Reduce your annual energy costs by as much as 30%
- Reduce your sound levels by up to 16 dBA to meet tighter regulations
- Enhance your flexibility with a variety of chiller options to fit your needs
- Minimise your environmental impact dramatically
- Lower your part load energy and night time sound levels with inverter fans and compressors
- Deliver increased motor longevity and increased chiller reliability with low starting currents
- Cut your operational expenses with a high chiller power factor at all loads
- Improve your peace of mind knowing we stand behind every chiller

Options / Accessories

- BMS Interfacing options
- Advanced Controls (Silent night, Quick restart)
- Low temperature application options
- Dual pressure relief valves
- Flow switch
- Epoxy treatment Microchannel Coils
- Fan options
- Enclosure options
- Sound attenuation options
- Anti-vibration mounts options
- Desuperheater

Photo courtesy of the LTCM lab of the Ecole Polytechnique Fédérale de Lausanne, Switzerland

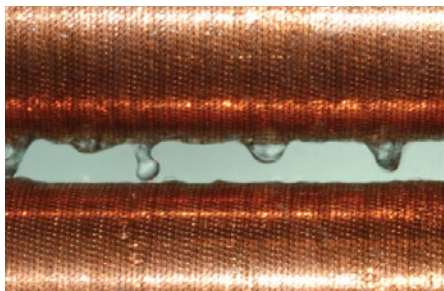

Reduce refrigerant charges by up to 15% beyond traditional chiller designs with the YVAA's falling-film evaporator and microchannel condenser coil technology.



A more efficient chiller means less electricity generation, which reduces greenhouse gas emissions, water consumption – and your environmental footprint. The sustainability advantages of the YVAA chiller give you the opportunity to **earn points in the LEED® and BREEAM® building certification programs.**



Air-cooled VSD screw chiller

YVAA 0588 to 1843



Application flexibility (*) example of selections

YVAA	0588	0643	0665	0688	0700	0743	0765	0788	0843	0865	0888	0943
Cooling capacity (kW)	569	573	588	639	614	658	649	738	748	768	808	812
EER	3.24	3.07	3.17	3.23	2.83	3.13	3.16	3.15	2.90	3.14	3.17	2.99
SEER	4.32	4.27	4.40	4.58	4.15	4.41	4.63	4.73	4.50	4.73	4.80	4.61
ηs, c	170	168	173	180	163	173	182	186	177	186	189	181
Sound power level (dBA)	98	96	97	98	95	97	96	98	98	98	98	99

YVAA	0960	0963	0965	0988	1015	1065	1088	1093	1143	1173	1188	1193	1215
Cooling capacity (kW)	832	867	898	933	948	971	997	964	1002	1008	1022	1017	1047
EER	3.06	3.07	3.09	3.15	3.13	3.02	3.15	2.92	2.95	2.92	3.18	3.07	3.11
SEER	4.48	4.71	4.87	5.00	4.85	4.74	4.97	4.61	4.68	4.61	5.02	4.78	4.90
ηs, c	176	186	192	197	191	187	196	181	184	182	198	188	193
Sound power level (dBA)	98	99	99	100	99	100	100	100	99	100	100	100	100

YVAA	1288	1315	1343	1388	1443	1488	1515	1543	1650	1665	1693	1700	1843
Cooling capacity (kW)	1118	1077	1221	1260	1455	1237	1346	1371	1385	1390	1545	1569	1654
EER	3.23	3.17	3.11	3.11	2.92	3.17	3.14	3.16	3.08	3.04	3.07	2.91	2.96
SEER	4.84	4.72	4.68	4.63	4.56	4.87	4.83	4.86	4.73	4.62	4.75	4.57	4.67
ηs, c	190	186	184	182	179	192	190	192	186	182	187	180	184
Sound power level (dBA)	100	100	101	100	101	101	102	102	103	102	102	103	105

Net values at Eurovent nominal conditions for models using R134a: Cooling capacities in kW given for 7°C water leaving temperature Δt 5°C and 35°C ambient temperature. SEER calculated according to EN14511 and EN14825.

ηs calculated according to Ecodesign regulation for chillers comfort cooling (2016/2281) with the method FO/FF.

For other Ecodesign calculations, please contact your JCI representative.

(*) YVAA is a tailor and tune chiller. Its performance will be factory-adjusted to match the exact site requirements based on the specific project operating conditions.

The table above shows only a representative sample of performance points based on generic project operating conditions working with R134a refrigerant.

For R513a information contact your JCI Representative.

For tailored and tuned performance based on your specific project requirements, and for more information, please contact your Johnson Controls representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.

Technical data

YVAA			0588	0643	0665	0688	0700	0743	0765	0788	0843	0865	0888	0943
Dimensions	Length	mm	7397	6274	7397	8514	5741	7397	7397	8514	7397	8514	9631	8514
	Width	mm	2241											
	Height	mm	2401											
Operating weight kg			7554	6208	6551	7012	6977	6589	7668	8011	6793	8100	8445	7151
Refrigerant charge kg			204	150	164	189	186	160	204	218	182	216	228	192

YVAA			0960	0963	0965	0988	1015	1065	1088	1093	1143	1173	1188	1193	1215
Dimensions	Length	mm	7397	8514	8514	9631	9631	10748	10748	9631	9631	10748	11865	10748	11865
	Width	mm							2241						
	Height	mm							2401						
Operating weight kg			7412	8314	8651	8996	9201	9007	9546	8665	9362	8612	9891	9704	10049
Refrigerant charge kg			228	240	242	246	261	248	268	243	268	264	277	282	286

YVAA			1288	1315	1343	1388	1443	1488	1515	1543	1650	1665	1693	1700	1843
Dimensions	Length	mm	12987	11864	11864	14104	11864	15222	14104	14104	11864	15222	15222	11865	15222
	Width	mm	2241												
	Height	mm	2401												
Operating weight kg			12435	12086	11169	12939	10558	13284	11249	12802	11287	14066	13149	12951	14066
Refrigerant charge kg			360	353	302	378	365	390	382	336	358	404	350	368	404




Manufacturer reserves the rights to change specifications without prior notice.

Dimensions and hydraulic connections

All drawings are for two pass evaporator. For other configurations, please, contact JCI.


YVAA 0700

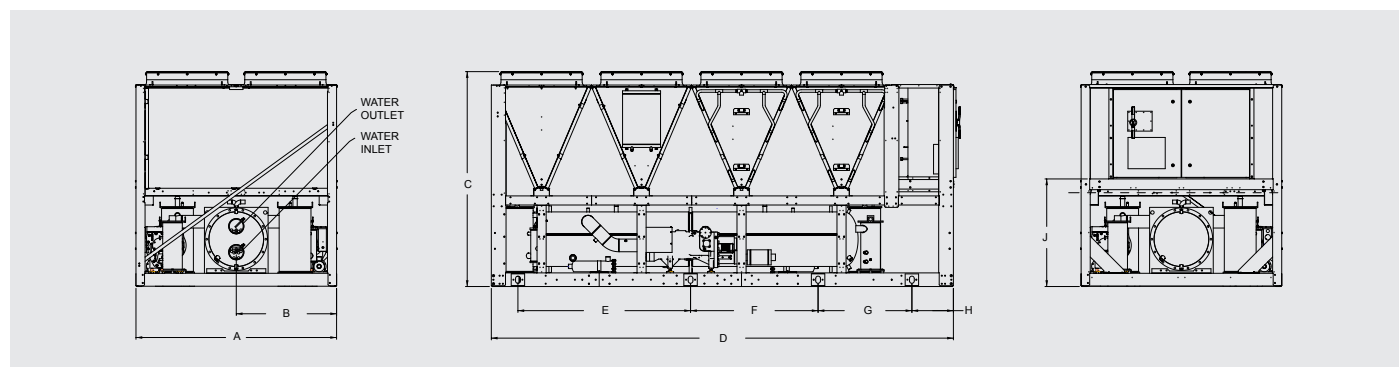

Unit frame	A	B	C	D	E	F	G	H	J
YVAA 0700	2241	1121	2401	5741	2098	1814	1054	464	1202

All dimensions in mm. Drawings not in scale.


YVAA 0643

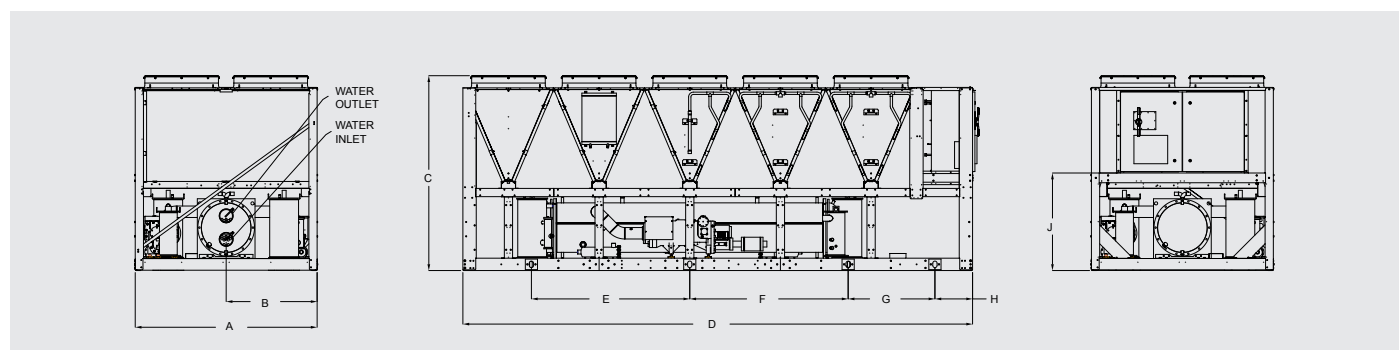

Unit frame	A	B	C	D	E	F	G	H	J
YVAA 0643	2241	1121	2400	6274	1962	2104	1069	464	1202

All dimensions in mm. Drawings not in scale.

YVAA 0588, 0665, 0743, 0765, 0843 & 0960

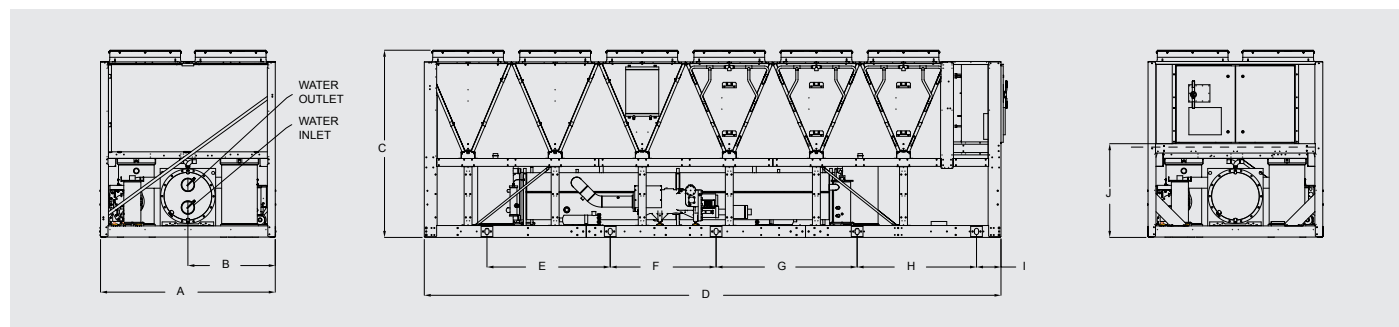


Unit frame	A	B	C	D	E	F	G	H	I	J
YVAA 0588 & 0765	2241	1121	2401	7397	1581	1358	1809	1531	314	1202
YVAA 0665 & 0743	2241	1121	2401	7397	1159	2125	2103	1069	464	1202
YVAA 0843	2241	1121	2401	7397	1464	1971	1951	1069	464	1202
YVAA 0960	2244	1122	2405	7397	1421	1358	1799	1541	314	1206

All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

All drawings are for two pass evaporator. For other configurations, please, contact JCI.


YVAA 0688, 0788, 0865, 0943, 0963 & 0965

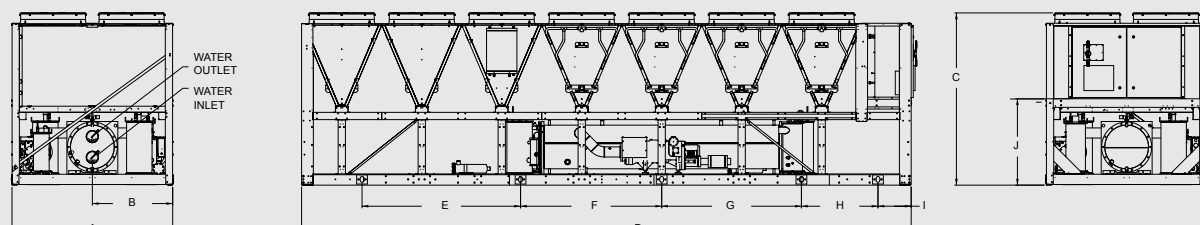

Unit frame	A	B	C	D	E	F	G	H	I	J
YVAA 0688 & 0943	2244	1122	2405	8514	2214	1951	1952	1069	464	1206
YVAA 0788	2244	1122	2405	8514	1774	2299	2299	1531	314	1206
YVAA 0865	2244	1122	2405	8514	2129	2299	2256	1069	464	1206
YVAA 0963 & 0965	2244	1122	2405	8514	1501	2115	1529 + 1228	1531	314	1206

All dimensions in mm. Drawings not in scale.


YVAA 0888, 0988, 1015, 1093 & 1143

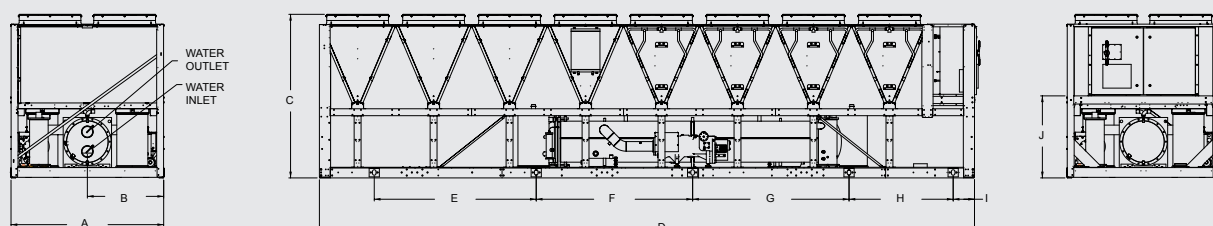

Unit frame	A	B	C	D	E	F	G	H	I	J
YVAA 0888	2244	1122	2405	9631	2381	2299	2299	1531	314	1206
YVAA 0988 & 1143	2244	1122	2405	9631	2656	1568	1529 + 1228	1531	314	1206
YVAA 1015	2244	1122	2405	9631	1467	2807	2706	1531	314	1206
YVAA 1093	2244	1122	2405	9631	2381	2351	2247	1531	314	1206

All dimensions in mm. Drawings not in scale.

YVAA 1065, 1088, 1173 & 1193

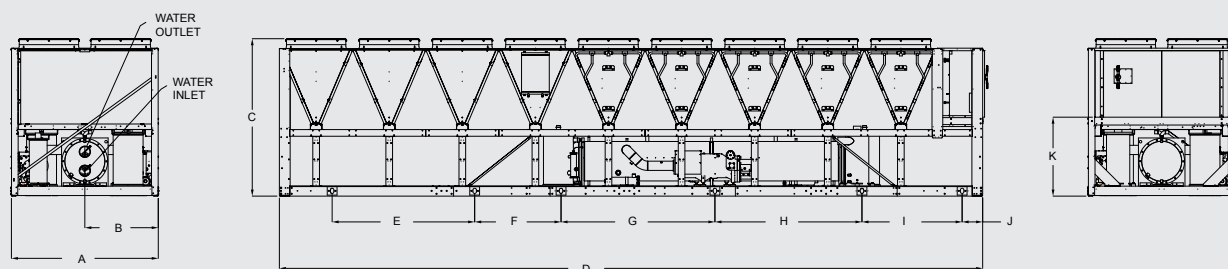


Unit frame	A	B	C	D	E	F	G	H	I	J	K
YVAA 1065	2244	1122	2405	10748	2178	1320	2351	2247	1531	314	1206
YVAA 1088	2244	1122	2405	10748	2433	1340	1620	1477 + 1228	1531	314	1206
YVAA 1173	2244	1122	2405	10748	2177	1323	2299	2299	1531	314	1206
YVAA 1193	2244	1122	2405	10748	2433	1340	1568	1529 + 1228	1531	314	1206

All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

All drawings are for two pass evaporator. For other configurations, please, contact JCI.


YVAA 1188, 1215, 1315, 1343, 1443, 1650 & 1700

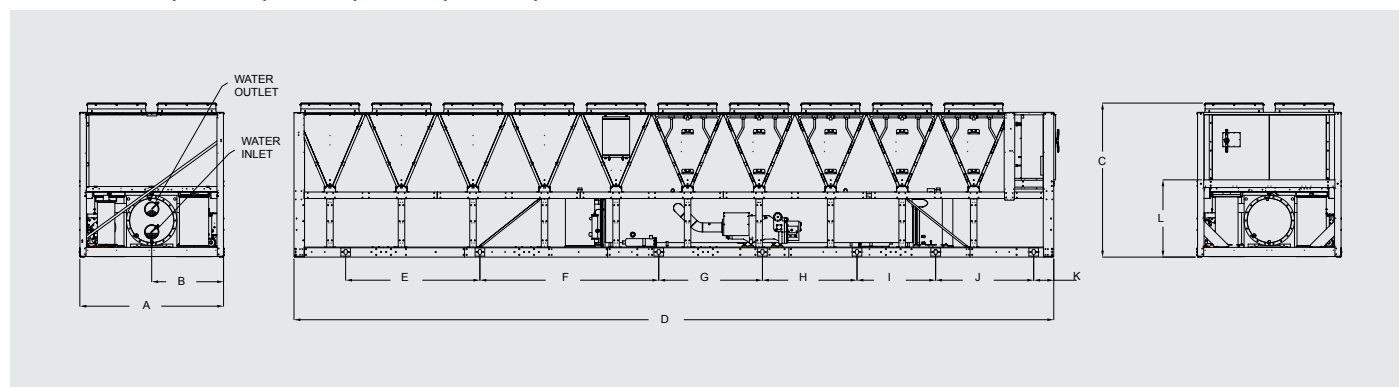

Unit frame	A	B	C	D	E	F	G	H	I	J	K	L
YVAA 1188	2244	1122	2405	11865	2097	2793	1619	1477	1228	1531	314	1206
YVAA 1215	2244	1122	2405	11865	2097	2793	1568	1529	1228	1531	314	1206
YVAA 1315 / 1343 / 1443	2243	1122	2405	11864	3397	1623	1437	2757	-	1531	314	1070
YVAA 1650 & 1700	2243	1122	2405	11864	3701	1319	1437	2757	-	1531	314	1070

All dimensions in mm. Drawings not in scale.

YVAA 1288

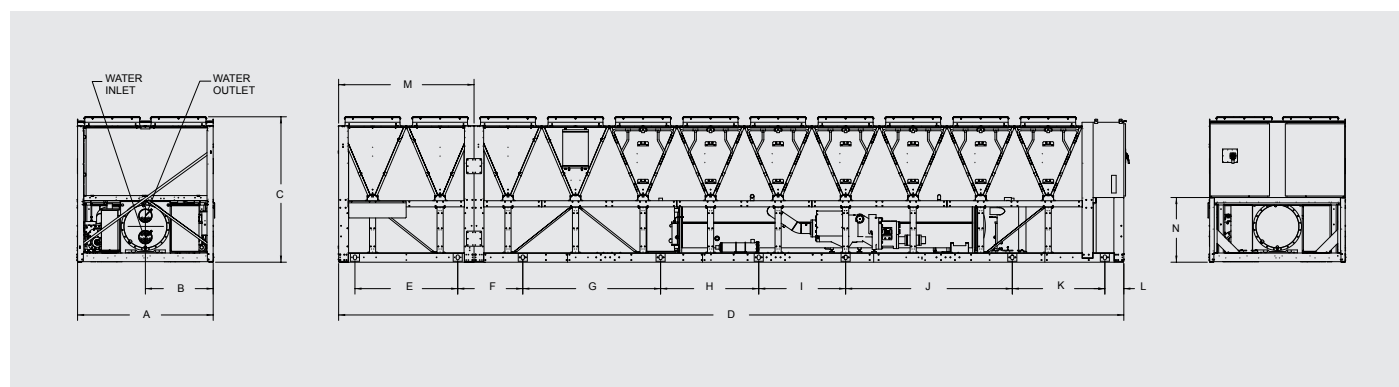


Unit frame	A	B	C	D	E	F	G	H	I	J	K	L	M	N
YVAA 1288	2243	1122	2405	12987	1700	1076	2280	1623	1437	2757	1531	314	2240	1070

All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

All drawings are for two pass evaporator. For other configurations, please, contact JCI.


YVAA 1388, 1515 & 1543

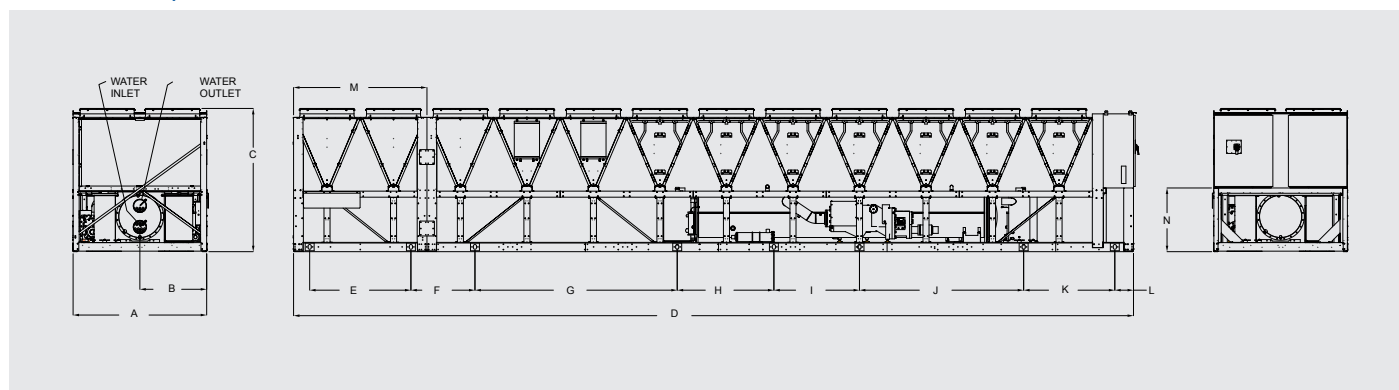

Unit frame	A	B	C	D	E	F	G	H	I	J	K	L	M	N
YVAA 1388 / 1515	2243	1122	2405	14104	1700	1076	3397	1623	1437	2757	1531	314	2240	1070
YVAA 1543	2243	1122	2405	14104	1700	1076	3701	1319	1437	2757	1531	314	2240	1070

All dimensions in mm. Drawings not in scale.

YVAA 1488, 1665, 1693 & 1843

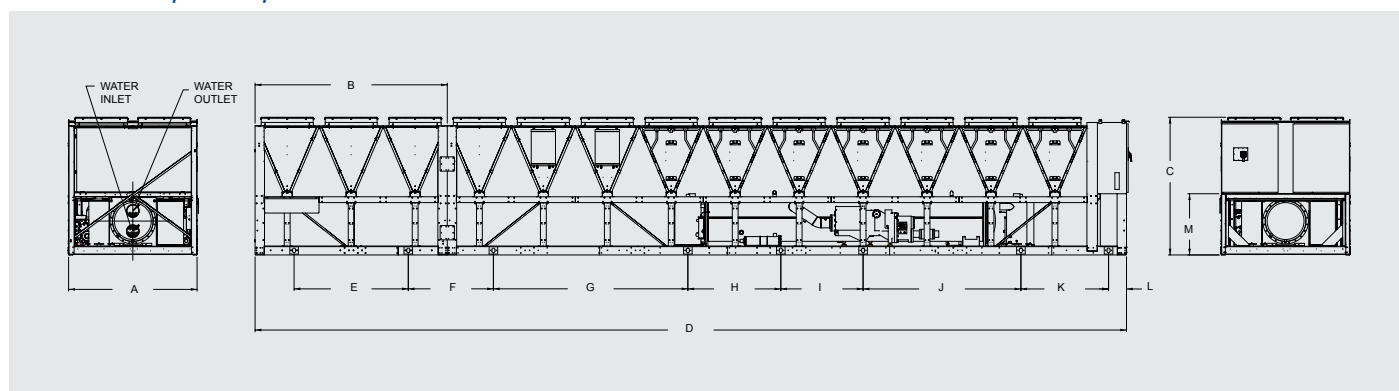


Unit frame	A	B	C	D	E	F	G	H	I	J	K	L	M
YVAA 1488	2244	3357	2405	15222	1995	1487	3397	1623	1437	2757	1531	314	1070
YVAA 1665 / 1693 / 1843	2244	3357	2405	15222	1995	1487	3701	1319	1437	2757	1531	314	1070

All dimensions in mm. Drawings not in scale.

YVFA

Air-cooled VSD screw chiller with integrated Free-cooling

Cooling capacities from 525 kW to 1575 kW

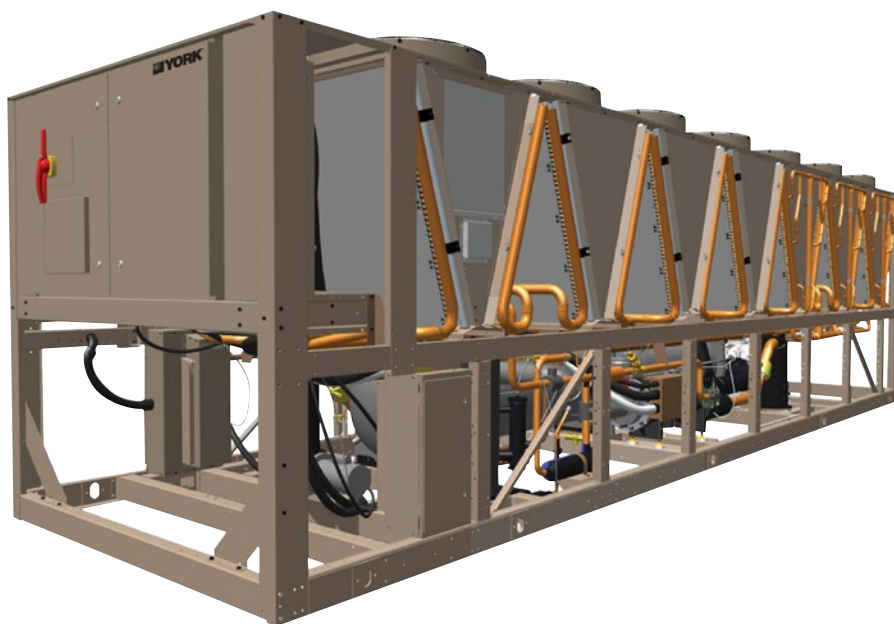

Compatible range



Features

- Available in Open and Closed (glycol free) loop configurations.
- Optimized Annual Energy Savings thanks to the unique combination of the YORK Variable Speed Drive technology expertise and the sophisticated free-cooling controls.
- Reduced installation footprint, thanks to the integration of the free-cooling coils together with the chiller.
- Lower ambient operating range when in free-cooling mode, compared to standard units.

Options / Accessories

- BMS Interfacing options
- Advanced Controls (Silent night, Quick restart)
- Low temperature application options
- Dual pressure relief valves
- Flow switch
- Epoxy treatment Microchannel Coils
- Fan options
- Enclosure options
- Sound attenuation options
- Anti-vibration mounts options
- Desuperheater

YVFA free-cooling chillers are available in open- or closed-loop configurations to maximize efficiency for your specific type of building


Open-loop configuration

Open-loop design permits building glycol to flow through the free cooling coils directly, with the best performance and the lowest first cost.


Closed-loop configuration

Closed-loop design integrates a brazed plate heat exchanger and pump loop. The building water loop is isolated from the free cooling coils, and the YVFA pump circulates glycol between the brazed plate heat exchanger and the free cooling coils. This provides the lowest pump pressure drop and a building loop that's glycol-free.

Air-cooled VSD screw chiller with integrated Free-cooling YVFA




Saving energy is simple in every situation

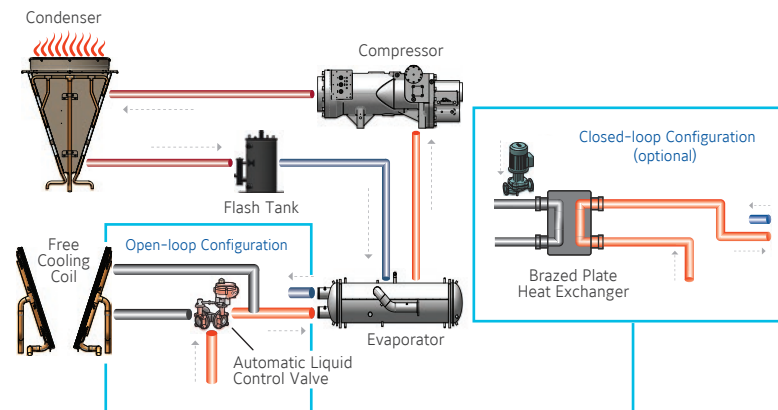


1 Mechanical Cooling Mode

When it's too warm to use ambient air for cooling, the YVFA performs as a standard chiller. The automatic flow-control valve in the open-loop configuration bypasses the free-cooling coils to reduce pump energy. When either cooling load or ambient temperature are less than full design condition, the variable-speed screw compressors and condenser fans modulate to optimize energy use. In a closed-loop configuration, the free-cooling coils are also bypassed.

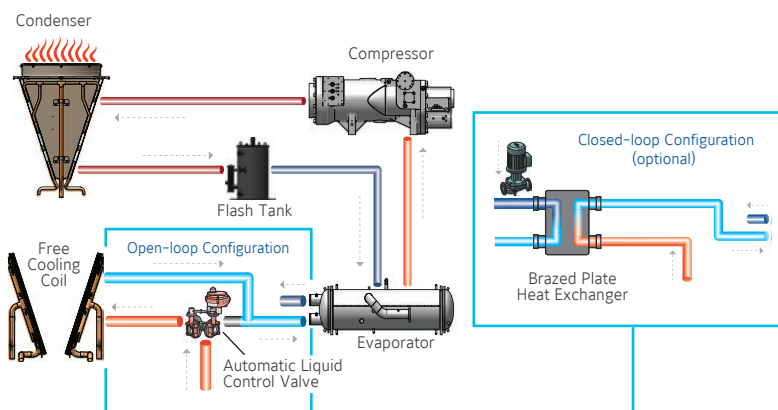

2 Hybrid Cooling Mode

When ambient temperatures permit, liquid flow through the free-cooling coils is enabled. This pre-cooling reduces energy use while the compressors deliver final cooling to meet setpoint. Thanks to YORK VSD Screw technology, at reduced ambient the compressors may draw less power than the fan motors required to move air through the free-cooling coils. Advanced controls provide the most efficient operation rather than simply shutting off compressors as quickly as possible. The Annual Energy Cost Report demonstrates the benefit of this intelligent control.

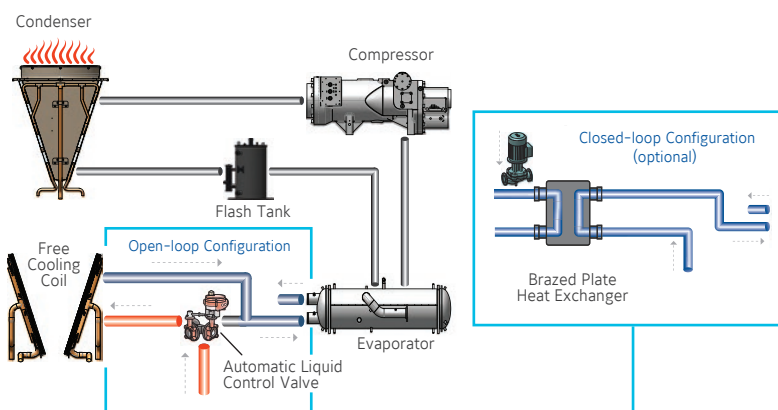

3 Free Cooling Mode

At lower ambient temperatures, full cooling load can be most efficiently delivered by the free-cooling coils. Compressors are shut off and the VSD fans are modulated to meet the cooling setpoint.




Manufacturer reserves the rights to change specifications without prior notice.

Dimensions and hydraulic connections


Open-loop configuration models

YVFA 0539 OL

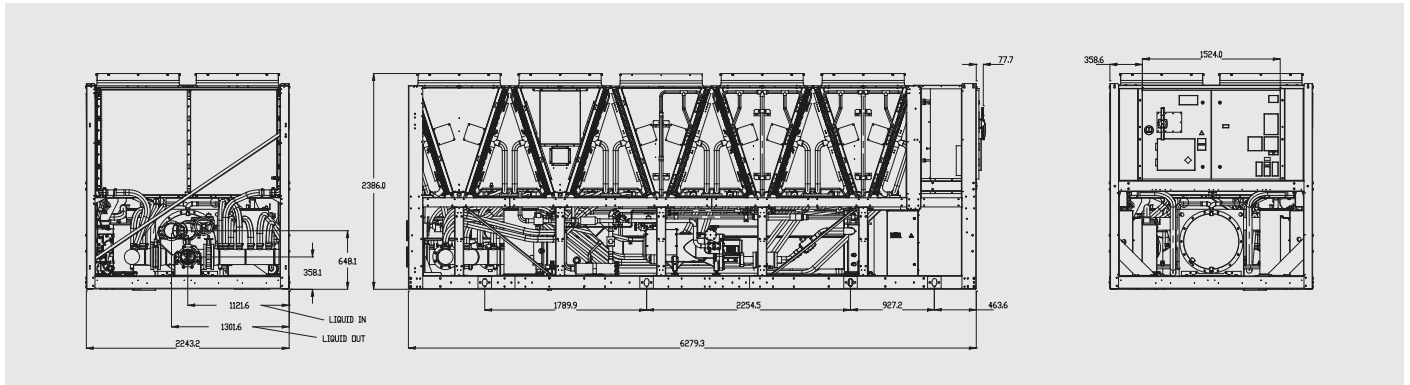


All dimensions in mm. Drawings not in scale.

YVFA 0709 OL

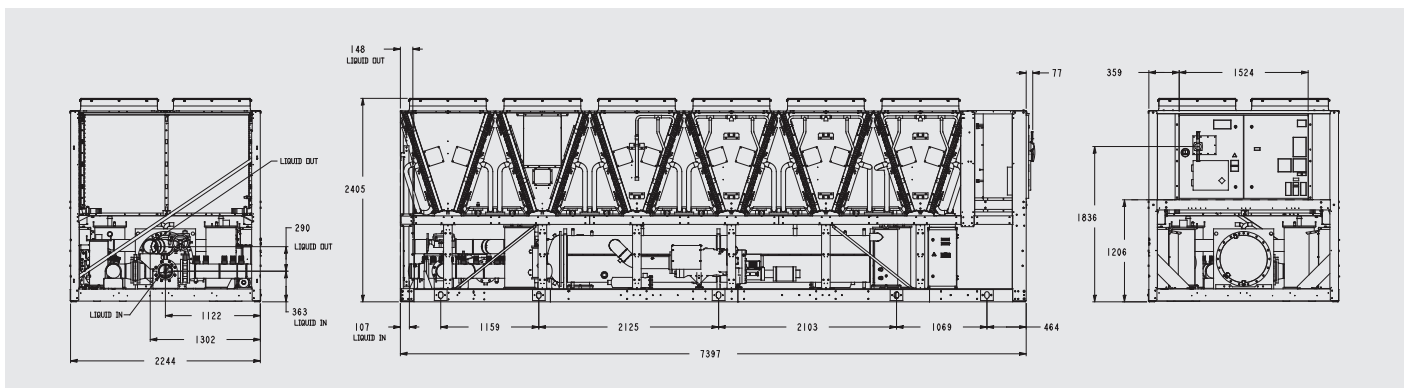


All dimensions in mm. Drawings not in scale.

YVFA 0889 OL

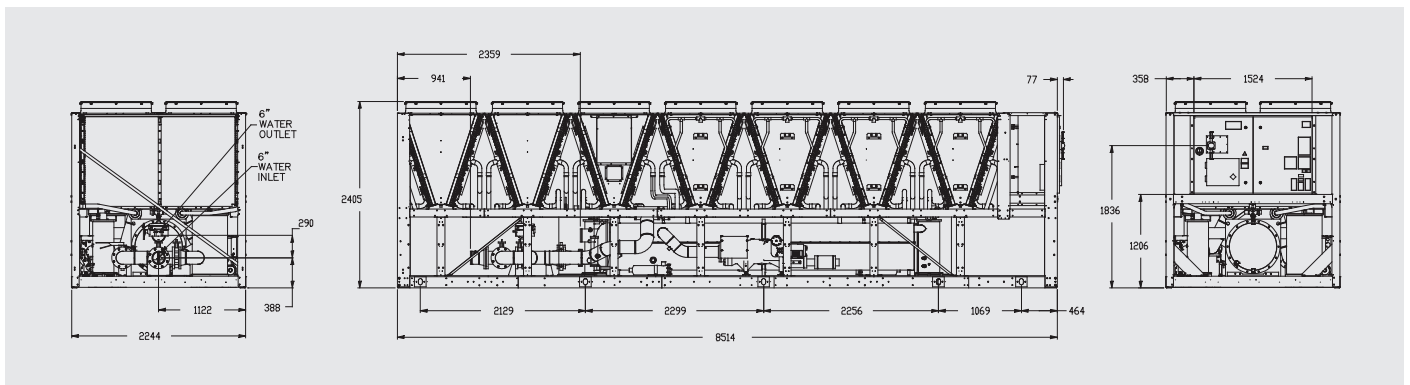


All dimensions in mm. Drawings not in scale.

YVFA 1009 OL

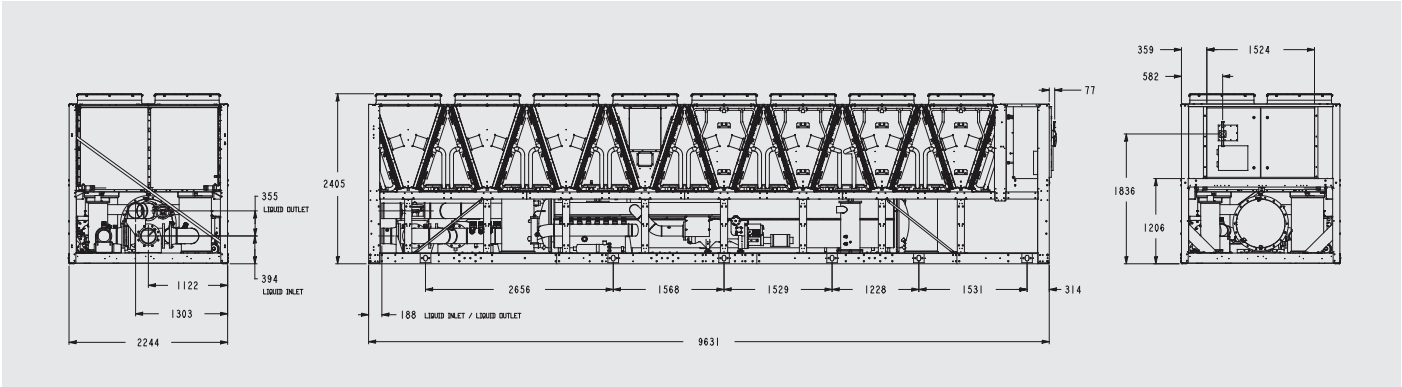


All dimensions in mm. Drawings not in scale.

YVFA 1069 OL

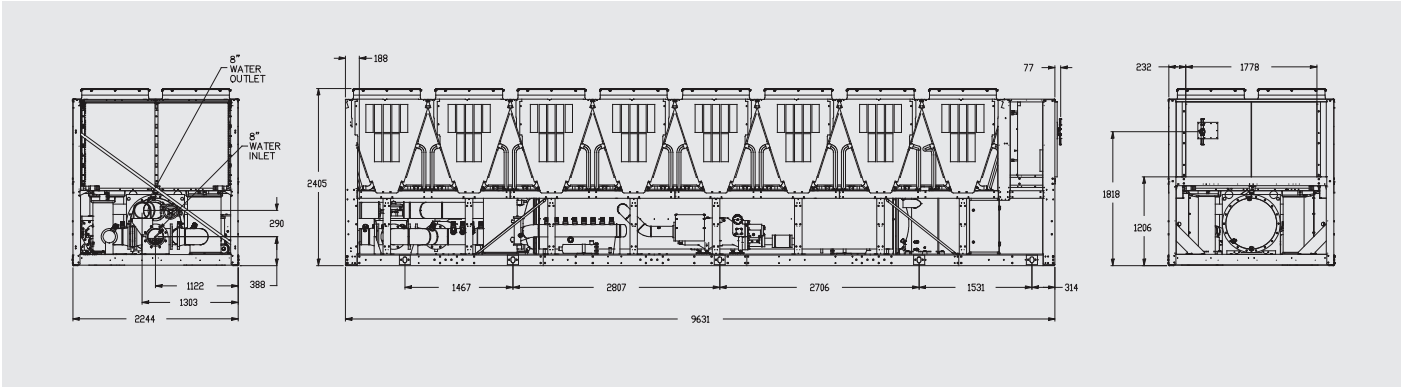


All dimensions in mm. Drawings not in scale.

YVFA 1239 OL

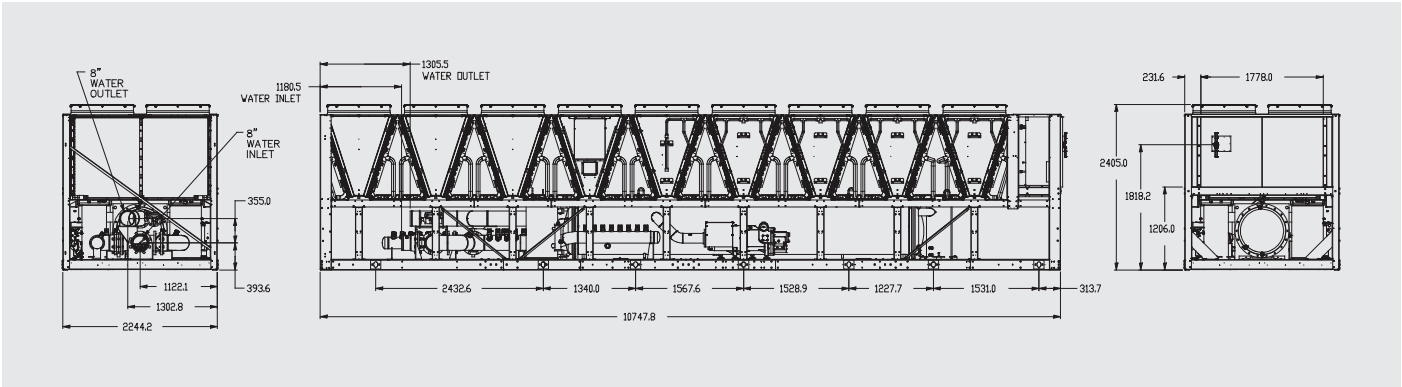

All dimensions in mm. Drawings not in scale.

YVFA 1419 & 1589 OL

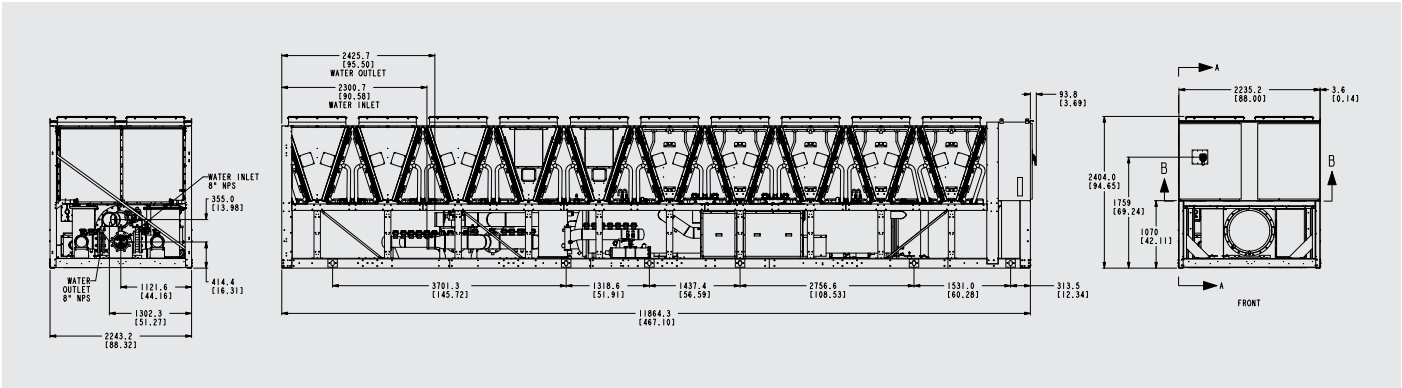


All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections


Closed-loop configuration models

YVFA 0709 CL

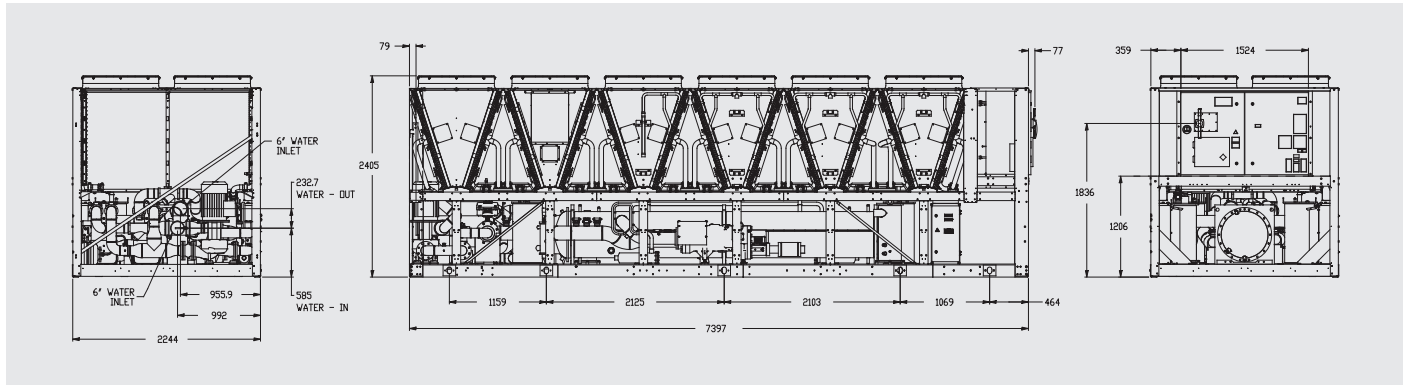


All dimensions in mm. Drawings not in scale.

YVFA 0889 CL

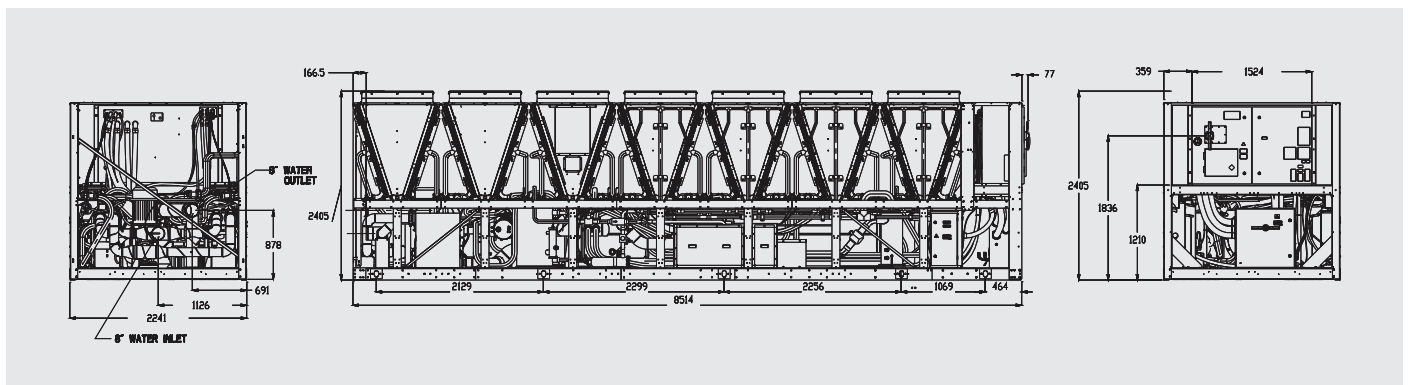

All dimensions in mm. Drawings not in scale.

YVFA 1069 CL

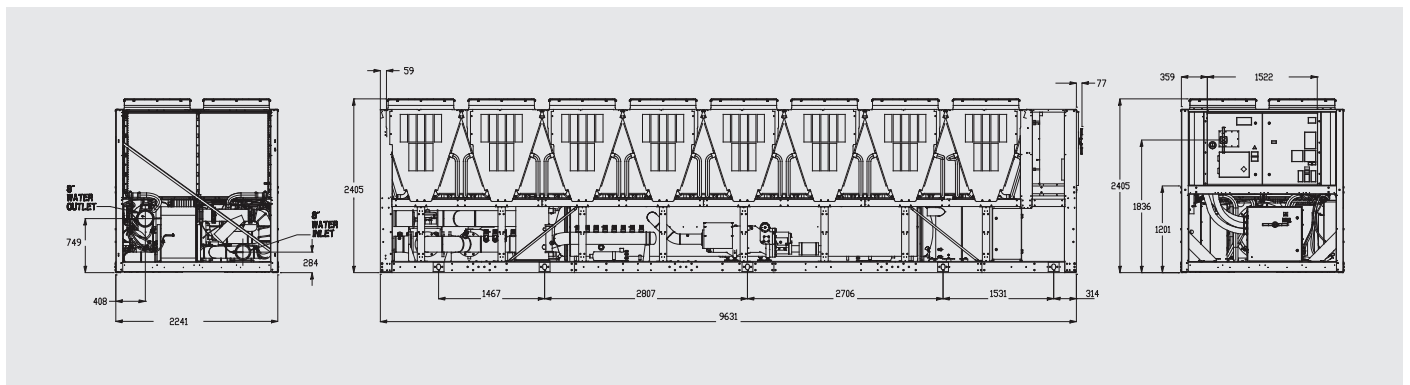


All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

Closed-loop configuration models

YVFA 1239 CL

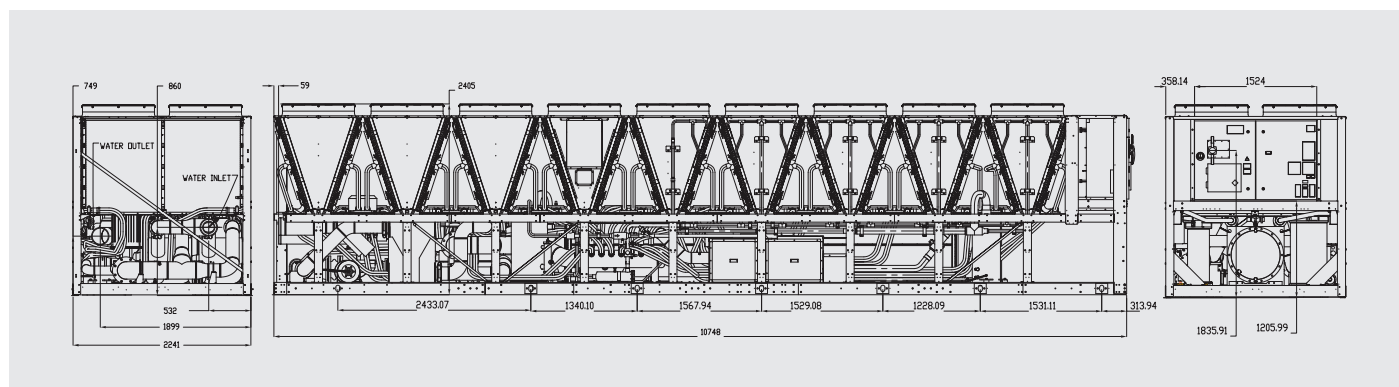

All dimensions in mm. Drawings not in scale.

Application flexibility (*) example of selections

YVFA	0539	0709	0889	1009	1069	1239	1419	1589
Mechanical Cooling capacity (kW)	529	657	846	946	1050	1213	1378	1473
Full Load Efficiency (EER) - Mechanical	3.03	3.00	3.05	3.19	3.07	2.98	2.89	2.84
Part Load Efficiency (SEPR) - Mechanical	6.13	6.14	6.33	6.62	6.35	6.01	6.07	6.03
Sound power level (dBA) - Mechanical	103	104	106	105	106	109	110	110
Total Temperature Free-Cooling (°C)	0.5	0.2	-0.7	-0.5	-1.5	-1.8	-2.1	-2.8
Efficiency during Hybrid Mode	8-40	6-40	6-35	6-35	5-28	5-24	5-27	5-28
Efficiency during Total Free-Cooling Mode	40-115	40-125	35-125	35-135	28-125	24-125	27-125	28-115

Cooling Capacity at: entering/leaving chilled water temperature 15°C/10°C (30% Glycol), ambient temperature 35°C

Sound Pressure according to Eurovent conditions.

(*) YVFA is a tailor and tune chiller. Its performance will be factory-adjusted to match the exact site requirements based on the specific project operating conditions.

The table above shows only a representative sample of performance points based on generic project operating conditions working with R134a refrigerant.

For R513a information contact your JCI Representative.

For tailored and tuned performance based on your specific project requirements, and for more information, please contact your Johnson Controls representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.

Technical data

YVFA			0539	0709	0889	1009	1069	1239	1419	1589
Dimensions	Length	mm	6280	7397	8514	9631	9631	10748	11864	
	Width	mm	2242						2243	
	Height	mm	2405						2404	
Operating weight kg			7394	8504	10396	11842	11884	12900	14131	17140
Refrigerant charge kg			172	164	216	246	262	282	365	368

YMW / YMRA

Water-cooled cooling only, remote condenser and heat pump scroll compressor chiller

Cooling capacities from 21 kW to 193 kW



Same cabinet w/o or with factory mounted hydrokit (one or two pumps).
More compact and slim.

Features

- Scroll compressors (single or tandem)
- Higher EER and COP
- 2 different frames / configurations:
 - 1 compressor / 1 circuit up to 45 kW
 - 2 compressors / 1 circuit from 50 to 190 kW
- Reduced refrigerant charge
- Condensing pressure control
- "Plug and Play" units

Available versions

14 available YMW sizes in three versions:

- 1) **YMW-CO** : Cooling only
- 2) **YMRA** : Remote condenser
- 3) **YMW-HP** : Reversible heat pump

Nominal capacity and technical data

YMW-CO	0020	0025	0030	0035	0040	0045	0050	0060	0075	0090	0120	0150	0170	0190
Cooling Capacity (kW)	21.2	26.2	31.1	34.8	39.2	46.6	50.9	61.1	77.3	91.1	118.4	147.1	170	192.7
EER	4.58	4.54	4.46	4.53	4.48	4.57	4.29	4.48	4.48	4.38	4.46	4.46	4.50	4.51
SEER	5.575	5.6	5.45	5.5	5.35	5.825	6.125	6.375	5.95	6.7	5.9	6.125	6.075	6.2
$\eta_{s,c}$	215	216	210	212	206	225	237	247	230	260	228	237	235	240
Length / Width / Height (mm)	821 / 455 / 1350									1210 / 850 / 1500				
Operating weight (kg)	162	182	179	185	191	214	352	371	392	411	597	666	701	745
YMRA	0020	0025	0030	0035	0040	0045	0050	0060	0075	0090	0120	0150	0170	0190
Cooling Capacity (kW)	21.2	26.2	31.1	34.8	39.2	46.6	50.9	61.1	77.3	91.1	118.4	147.1	170	192.7
Length / Width / Height (mm)	821 / 455 / 1350									1210 / 850 / 1500				
Operating weight (kg)	144	164	166	166	172	172	332	344	365	376	558	612	643	674
YMW-HP	0020	0025	0030	0035	0040	0045	0050	0060	0075	0090	0120	0150	0170	0190
Cooling Capacity (kW)	20.8	26	30.1	34	38.1	45.5	49.9	58.9	76.1	88.6	114.9	144.3	165.7	185.4
Heating Capacity (kW)	23.7	28.9	33.6	38.5	42.9	51.2	57.7	68.2	86.3	102.2	132	164.2	190.1	212.3
EER	4.45	4.47	4.28	4.35	4.33	4.39	4.15	4.24	4.36	4.20	4.26	4.33	4.34	4.28
COP	3.88	3.85	3.73	3.79	3.77	3.85	3.83	3.81	3.92	3.89	3.92	3.95	3.93	3.93
SCOP	5.03	5.03	4.85	4.95	4.88	4.74	4.99	4.94	5.22	5.09	5.17	5.27	5.23	5.22
$\eta_{s,h}$	193	193	186	190	187	182	192	190	201	196	199	203	201	201
Length / Width / Height (mm)	821 / 455 / 1350									1210 / 850 / 1500				
Operating weight (kg)	165	187	184	190	195	219	360	379	403	422	610	683	718	762

Net values at Eurovent nominal conditions:

YMW-CO: Standard Eurovent LCP/W/AC conditions in cooling mode: evaporator EWT/LWT 12°C/7°C, condenser EWT/LWT 30°C/35°C

YMRA: Evaporator EWT/LWT 12°C/7°C, condensing temperature 40°C

YMW-HP: Standard Eurovent LCP/W/AC conditions in cooling mode: evaporator EWT/LWT 12°C/7°C, condenser EWT/LWT 30°C/35°C

YMW-HP: Standard Eurovent LCP/W/AC conditions in heating mode: evaporator EWT/LWT 10°C, condenser EWT/LWT 40°C/45°C

Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.


SEER and SCOP calculated according to EN14511 and EN14825

η_s calculated according to Ecodesign regulation for chillers comfort cooling and heating (813/2013, 2016/2281).

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects


Dimensions and hydraulic connections

YMWA-CO/HP 0020-0045

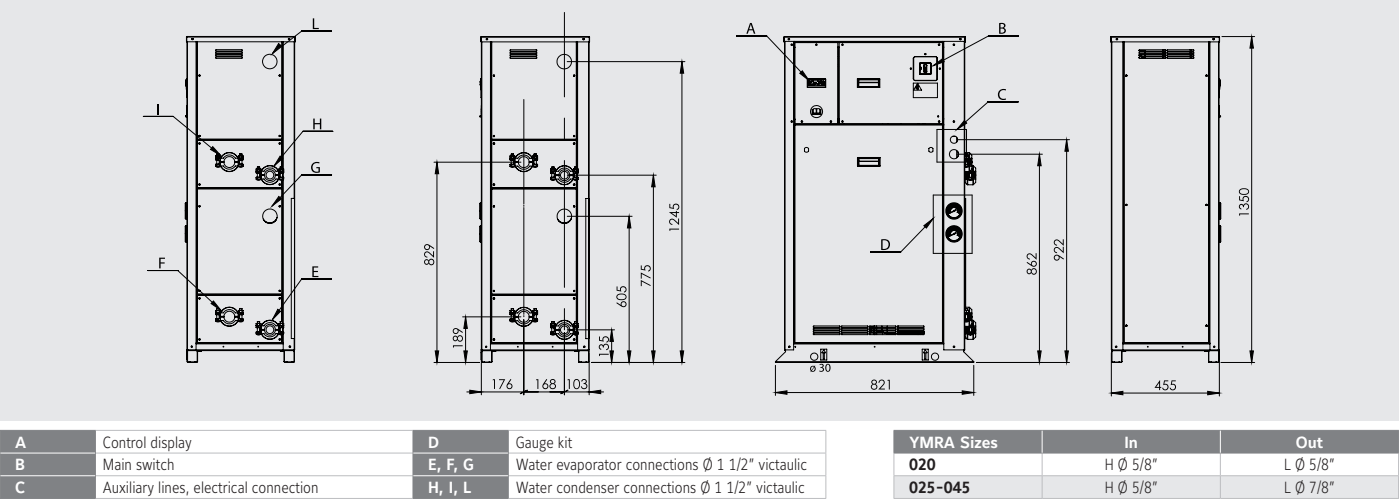


All dimensions in mm. Drawings not in scale.

YMWA-CO/HP 0050-0190 without Hydrokit

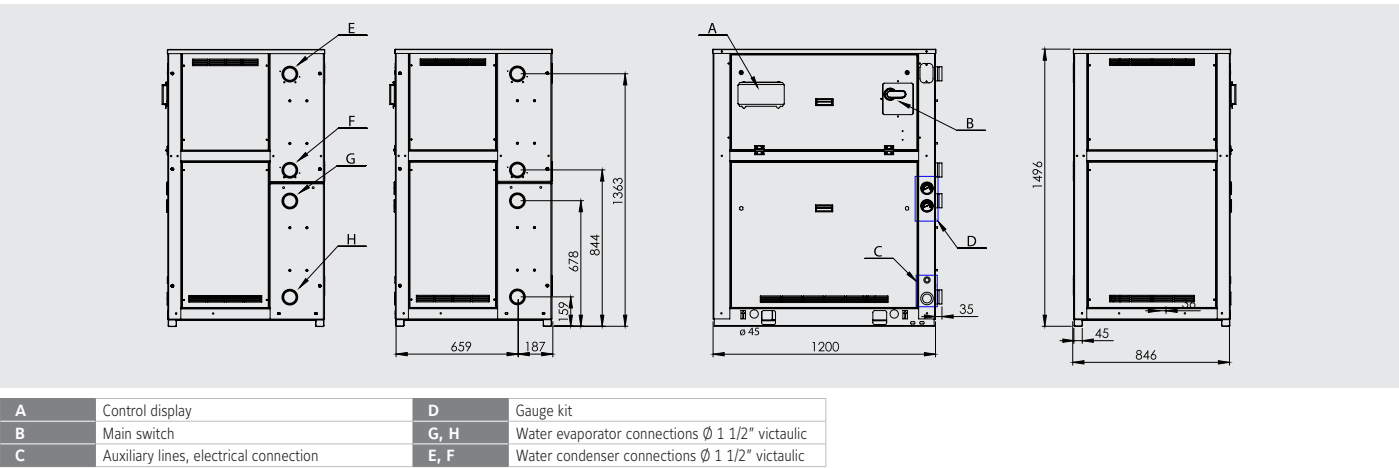

All dimensions in mm. Drawings not in scale.

YMWA-CO/HP 0050-0190 with Hydrokit

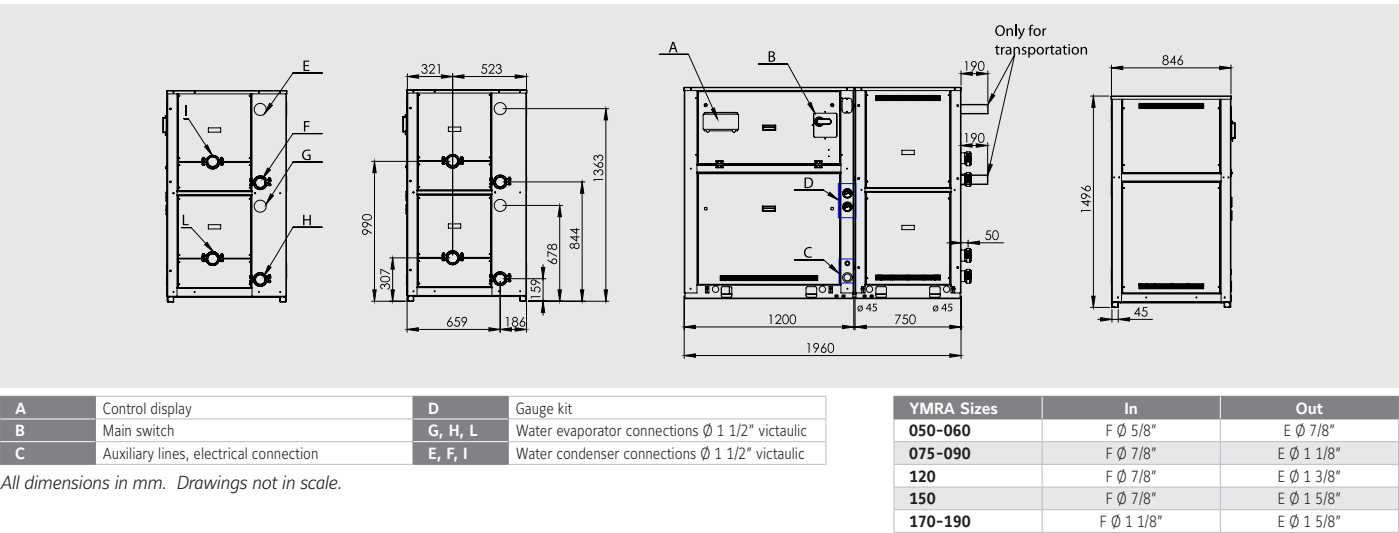

All dimensions in mm. Drawings not in scale.

YCSE / YCRE Style C

Water-cooled or remote air-cooled screw compressor chiller

Cooling capacities from 140 kW to 249 kW



YORK YCSE Style C chiller is designed for water or water-glycol cooling. It is designed for indoor installation in a plant room. The unit is completely factory assembled with all interconnecting refrigerant piping and wiring ready for field installation. **YCSE** unit is pressure tested, evacuated, and fully factory charged with refrigerant R134a and oil. After assembly, an operational test is performed with water flowing through the evaporator and condenser to ensure that each refrigerant circuit operates correctly.

Modular Concept for maximum installation flexibility

Features

Efficient screw compressors

Highly efficient the **YORK YCSE Style C** offers the highest standard of reliability and economical operation utilizing twin-screw rotor technology and fully modulating compressor slide valve unloading, together with low inrush current star delta starters. To further improve the operating efficiency the leaving liquid temperature can be remotely reset.

Quiet operation

The compressor has been designed so that there is minimal external gas pulsations and integral oil separators resulting in very low sound and vibration levels.

Small footprint

The compact design is ideally suited for reduced base area locations. The unit frame is manufactured from heavy gauge galvanized steel coated with baked-on powder paint.

Extended Heating range (NEW)

Operating range in heat pump mode has been extended, YCSE Style C units are now able to provide heated water outlet up to 60°C when it's working as a heat pump.

Options / Accessories

- BMS Interface (Modbus, Bacnet)
- Compressor Circuit Breaker
- Power Meter
- Heat pump sensor kit
- Evaporator Heater
- Cable Power Routing
- High Leaving Evaporator temperature
- High Condenser Water and glycol options
- Pressure Relief Valve (single/dual)
- Dual Compressor safety valve
- Suction and/or Discharge stop valves
- Water connection flanges
- Differential Water Pressure Switch
- Water Flow Switch and Water Filter
- Anti-vibration mounts (rubber or springs)

Nominal capacity and technical data

Model	YCSE				YCRE		
Size	0141	0181	0221	0241	0141	0181	0221
Cooling Capacity (kW) *	139.6	179.5	219.5	249.3	135	175	215
EER	4.84	4.80	4.71	4.72	4.22	4.19	4.10
ESEER	5.35	5.69	5.71	5.72	Not Applicable		
SEER	5.14	5.46	5.51	5.52			
η _{s,c}	203	215	217	218			
Sound power level (dBA)	88	89	90	91	88	89	90
Length / Width / Height (mm)	Base 1 378 max / 806 / 1 681						
Operating weight (kg)	860	950	1 040	1 075	765	835	900

* YCSE: At 35°C leaving condenser liquid temperature and 7°C leaving chilled liquid temperature according to EUROVENT calculation EN14511:2011


* YCRE: At 45°C condensing temperature and 7°C leaving chilled liquid temperature

Ecodesign figures are calculated following fixed water and variable outlet approach (FW/VO). For other Ecodesign calculations, please contact your JCI representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects


Dimensions and hydraulic connections

YCSE 0141 to 0241

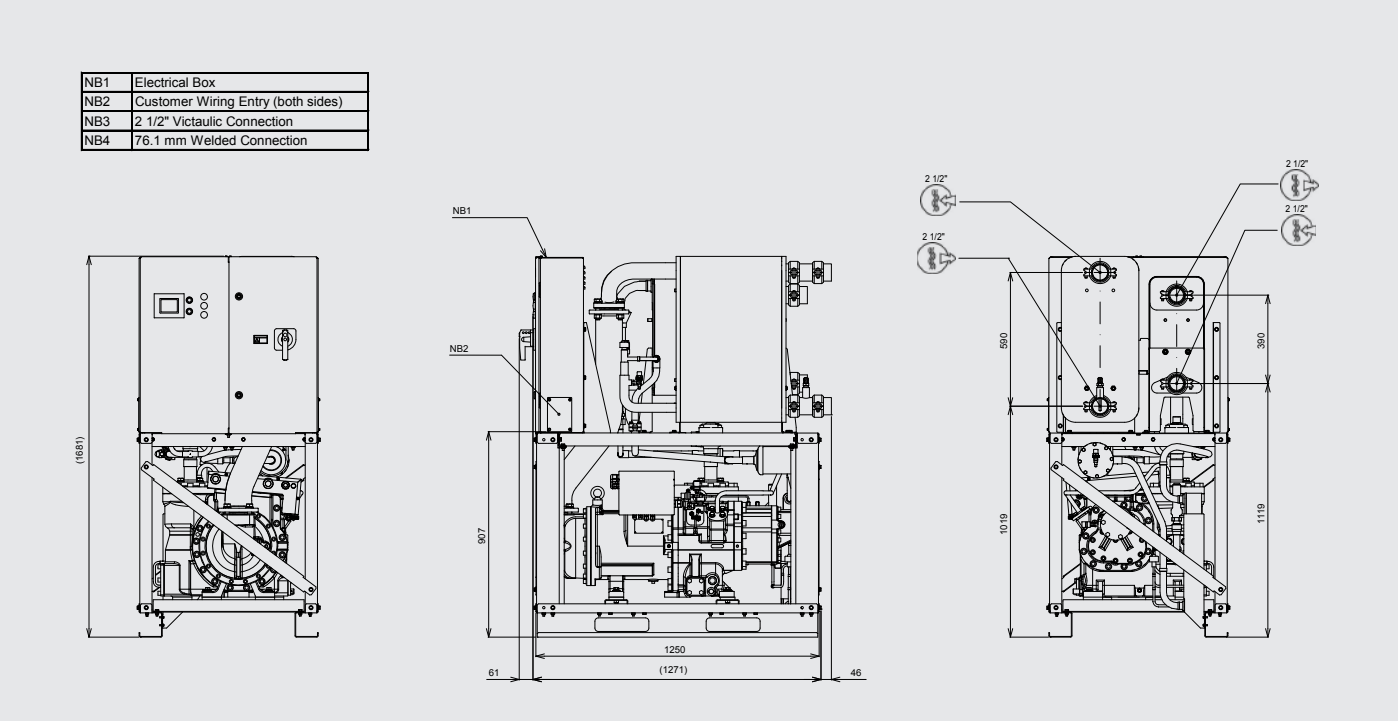

All dimensions in mm. Drawings not in scale.

YCRE 0141 to 0221

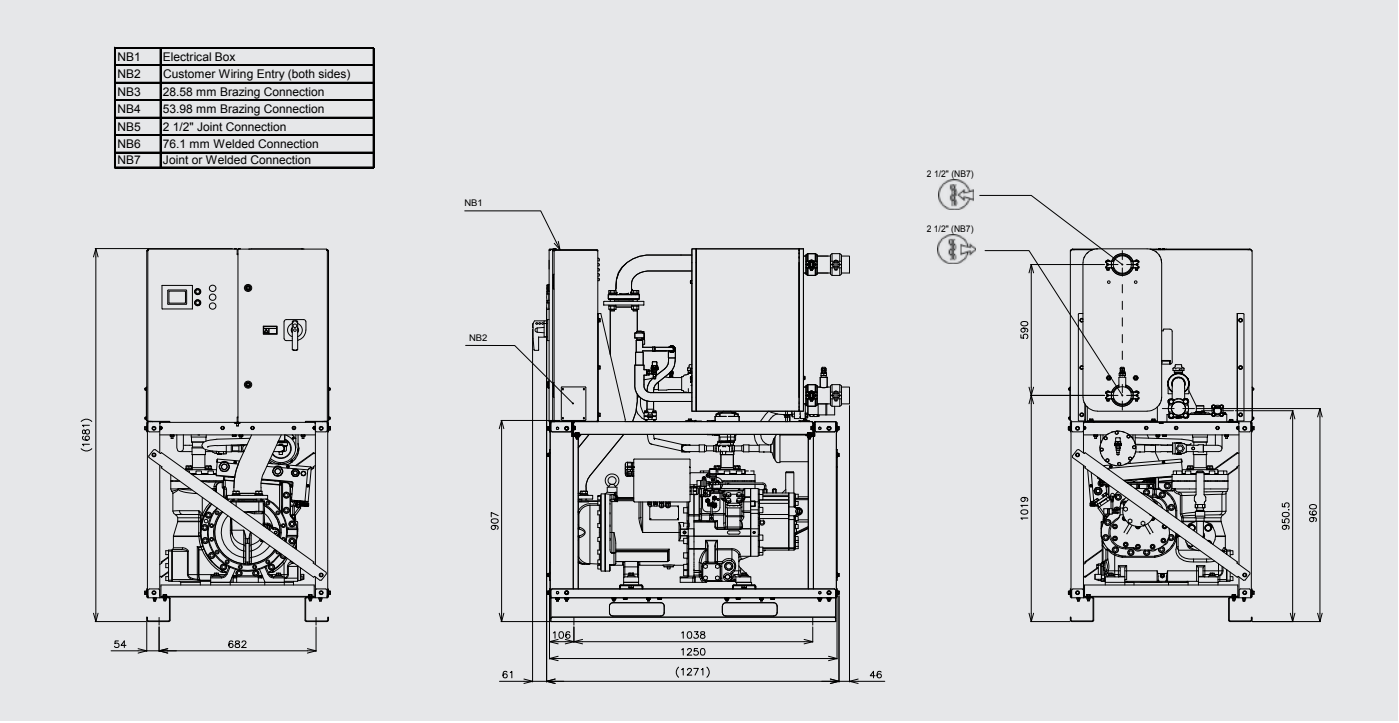


All dimensions in mm. Drawings not in scale.

YCWL / YCRL

Water-cooled or remote air-cooled scroll compressor chiller

Cooling capacities from 178 kW to 590 kW

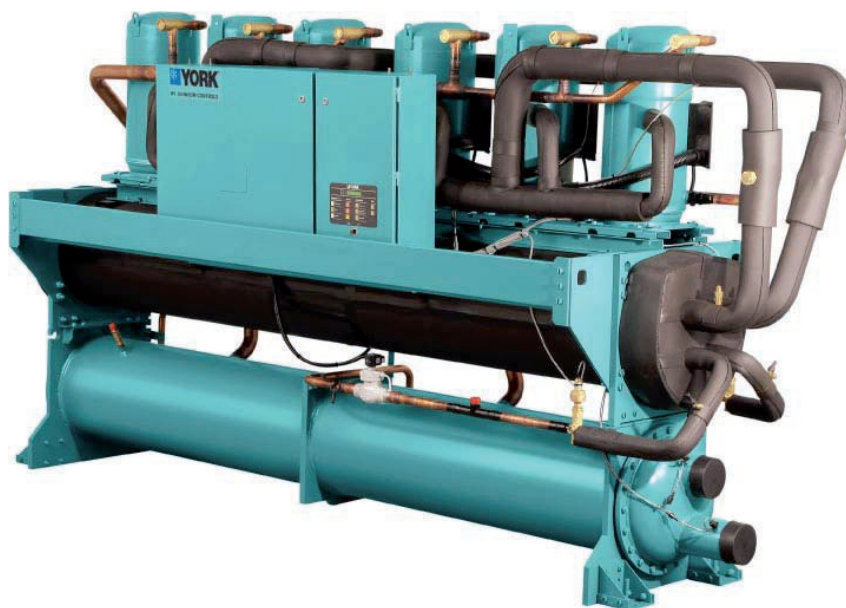

Features

The **YCWL** series was designed to produce the greatest cooling capacity with the lowest sound levels. The use of scroll compressors and shell & tube heat exchangers provides optimum efficiency at part load. Its dimensions have been optimized to pass through a doorway 2 m high by 90 cm wide.

The **YCWL** is designed for all air conditioning applications and medium temperature process cooling. It is equipped with two independent cooling circuits and regulated by a micro-processor that optimizes chiller performance.


The **YCWL** is designed for indoor installation and each **YCWL** is fully tested before leaving our factories.

Options

- Leaving Chilled Liquid from -12 to +15°C
- Leaving Condenser Liquid from +18 to +50°C
- Compressor acoustic blankets
- Flow switch or pressure differential switch
- Soft starters
- Neoprene pads or spring isolators
- Dual relief valves kit

Water-cooled or remote air-cooled scroll compressor chiller

YCWL / YCRL 0201 to 0611



Performances

YCWL-SE	0292	0343	0396
Cooling capacity (kW) ¹	291	330	367
EER ¹	4.67	4.62	4.67
SEER ¹	5.97	5.90	6.06
η_s, c ¹	230	230	234
Sound Pressure (dB(A)) ²	72	74	76

YCWL-HE	0201	0231	0261	0302	0347	0426	0447	0532	0611
Cooling capacity (kW) ¹	191	219	242	306	351	408	442	495	590
EER ¹	4.92	5.05	4.99	4.91	4.97	5.03	4.99	4.99	4.88
SEER ¹	5.52	5.86	6.53	6.25	6.08	6.28	5.97	6.18	5.88
η_s, c ¹	213	227	253	242	235	243	231	239	227
Sound Pressure (dB(A)) ²	68	70	72	72	74	76	74	71	72

YCRL-HE	0201	0231	0261	0302	0347	0386	0447	0532	0611
Cooling capacity (kW) ³	178	207	233	273	325	356	415	485	556
EER ³	4.00	4.00	4.12	4.20	4.16	4.11	4.17	4.06	3.99
Sound Pressure (dB(A)) ²	64	65	67	67	70	68	69	71	73

1: Ratings in accordance to Ecodesign, fixed water flow and fixed outlet (FW/FO).

2: Sound pressure measured at 1m.

3: Cooling capacity and efficiencies at 12/7°C chilled water in the evaporator and saturated discharge temperature 45°C.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.

Technical data

YCWL-SE	0292	0343	0396
Dimensions	Length mm	3161	3159
	Width mm	859	
	Height mm	1830	1819
Operating weight	kg	2481	2716

YCWL-HE	0201	0231	0261	0302	0347	0426	0447	0532	0611
Dimensions	Length mm	3161	3098	3154	3169	3132	3133	3643	
	Width mm	859	857	844	859	859	885	885	
	Height mm	1670	1914	1820	1819	1889	1889	1946	1965
Operating weight	kg	2218	2512	2463	2481	2808	2824	3632	3838


YCRL-HE	0201	0231	0261	0302	0347	0386	0447	0532	0611
Dimensions	Length mm	3086	3061	3076	3061	3617	3576		
	Width mm	826	856	843	856	965	965	902	
	Height mm	1438	1481	1471	1593	1683	1641	1638	1641
Operating weight	kg	1309	1481	1471	1593	1682	1947	2266	2264



Manufacturer reserves the rights to change specifications without prior notice.

Dimensions and hydraulic connections

YCWL0292SE, YCWL0343SE, YCWL0396SE, YCWL0201HE, YCWL0231HE, YCWL0261HE, YCWL0302HE, YCWL0347HE, YCWL0426HE, YCWL0447HE

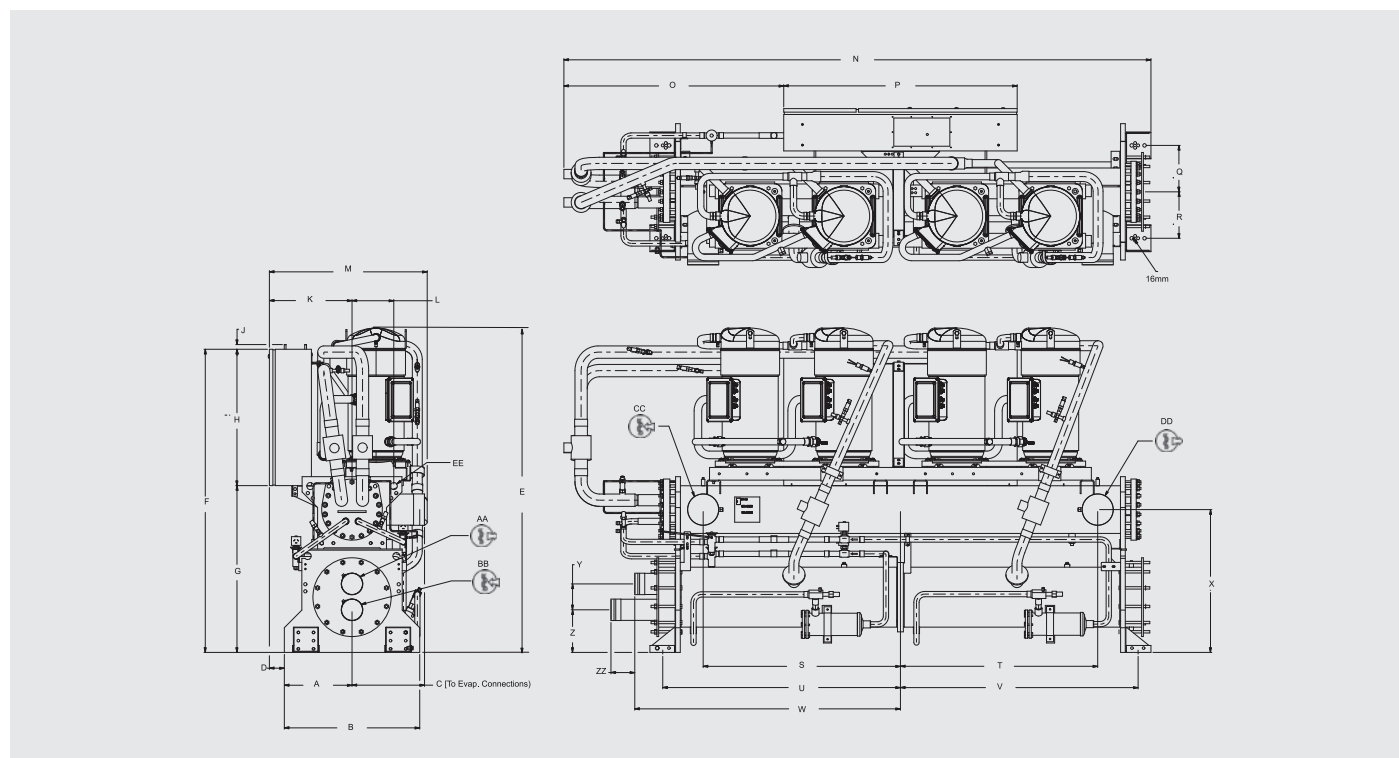


YCWL	0292SE	0343SE	0396SE	0201HE	0231HE	0261HE	0302HE	0347HE	0426HE	0447HE
Dimension	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
A	368	368	368	368	368	368	368	368	368	381
B	737	737	737	737	737	737	737	737	737	762
C	299	394	394	299	407	394	394	406	406	406
D	81	81	81	81	81	81	81	81	81	69
E	1830	1819	1819	1670	1914	1820	1819	1889	1889	1946
F	1638	1714	1714	1638	1753	1714	1714	1753	1753	1778
G	901	977	978	901	1016	977	977	1016	1016	1041
H	737	737	737	737	737	737	737	737	737	737
J	25	25	25	25	25	25	25	25	25	25
K	450	450	450	311	450	450	450	450	450	450
L	311	311	311	311	324	311	311	324	324	452
M	859	859	859	859	857	844	859	859	859	885
N	3161	3169	3159	3161	3098	3154	3169	3132	3133	3643
O	1163	1171	1155	1163	1100	1156	1171	1134	1133	1334
P	1270	1270	1270	1270	1270	1270	1270	1270	1270	1270
Q	251	251	251	251	251	251	251	251	251	264
R	251	251	251	251	251	251	251	251	251	264
S	1080	1080	1080	1080	1054	1080	1080	1054	1054	1295
T	1080	1080	1080	1080	1054	1080	1080	1054	1054	1295
U	1293	1293	1293	1293	1293	1293	1293	1293	1293	1598
V	1293	1293	1293	1293	1293	1293	1293	1293	1293	1598
W	1445	1445	1455	1445	1445	1445	1445	1455	1455	1774
X	813	813	813	813	845	813	813	845	845	921
Y	181	181	207	181	181	181	181	207	207	219
Z	210	210	197	210	210	210	210	197	197	216
ZZ	130	130	133	130	130	130	130	133	133	132
EE Ø	38	38	38	38	38	38	38	38	38	51

All dimensions in mm. Drawings not in scale.

YCWL	0292SE	0343SE	0396SE	0201HE	0231HE	0261HE	0302HE	0347HE	0426HE	0447HE
Water Connections	in	in	in	in	in	in	in	in	in	in
AA Ø	4	4	5	4	4	4	4	5	5	5
BB Ø	4	4	5	4	4	4	4	5	5	5
CC Ø	6	6	6	6	8	6	6	8	8	8
DD Ø	6	6	6	6	8	6	6	8	8	8

Dimensions and hydraulic connections

YCWL0532HE

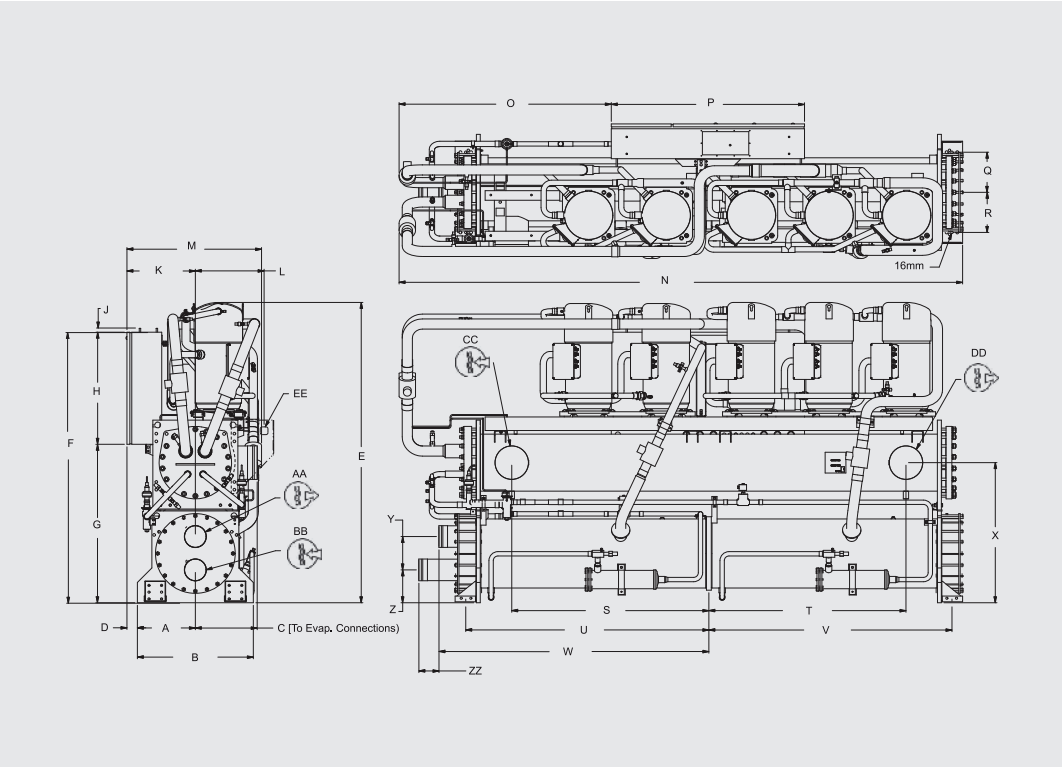


YCWL	0532HE
Dimension	mm
A	381
B	762
C	406
D	69
E	1965
F	1778
G	1041
H	737
J	25
K	450
L	452
M	885
N	3643
O	1334
P	1270
Q	263
R	263
S	1295
T	1295
U	1598
V	1598
W	1774
X	921
Y	219
Z	216
ZZ	132
EE Ø	51

All dimensions in mm.

YCWL	0532HE
Water Connections	in
AA Ø	5
BB Ø	5
CC Ø	8
DD Ø	8

YCWL0611HE

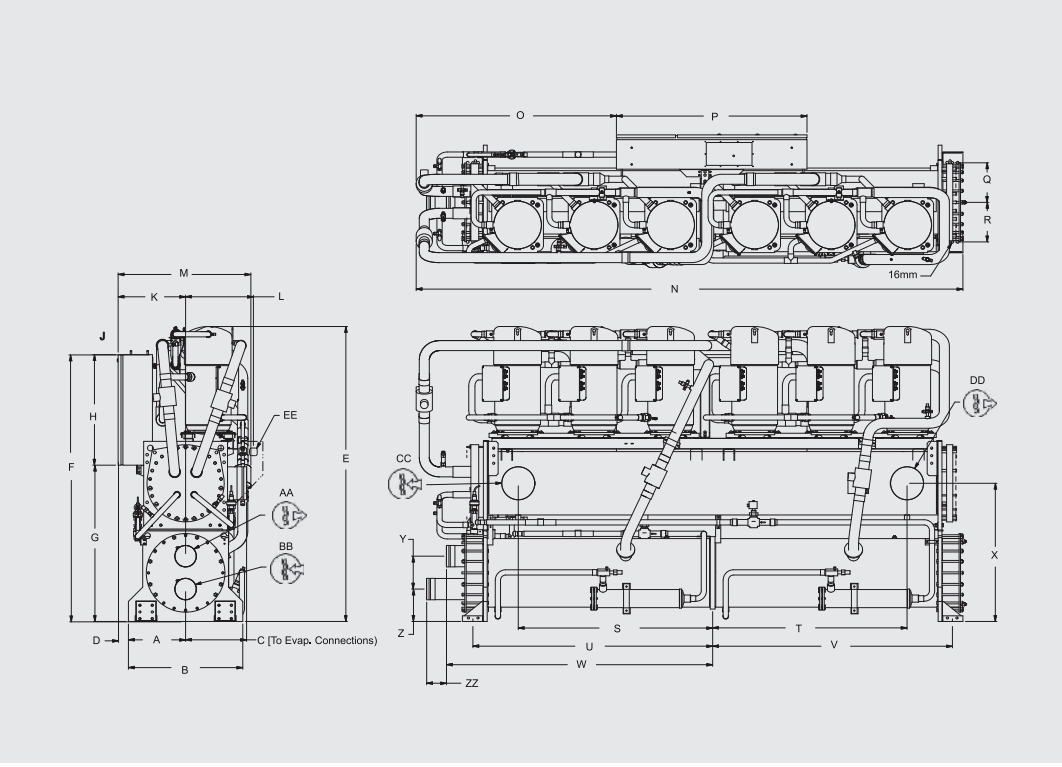


YCWL	0611HE
Dimension	mm
A	381
B	762
C	406
D	69
E	1965
F	1778
G	1041
H	737
J	25
K	450
L	452
M	885
N	3643
O	1334
P	1270
Q	264
R	264
S	1295
T	1295
U	1598
V	1598
W	1774
X	921
Y	219
Z	216
ZZ	132
EE Ø	51

All dimensions in mm.

YCWL	0611HE
Water Connections	in
AA Ø	5
BB Ø	5
CC Ø	8
DD Ø	8

Dimensions and hydraulic connections

YCRL 0201 HE to YCRL 0347 HE

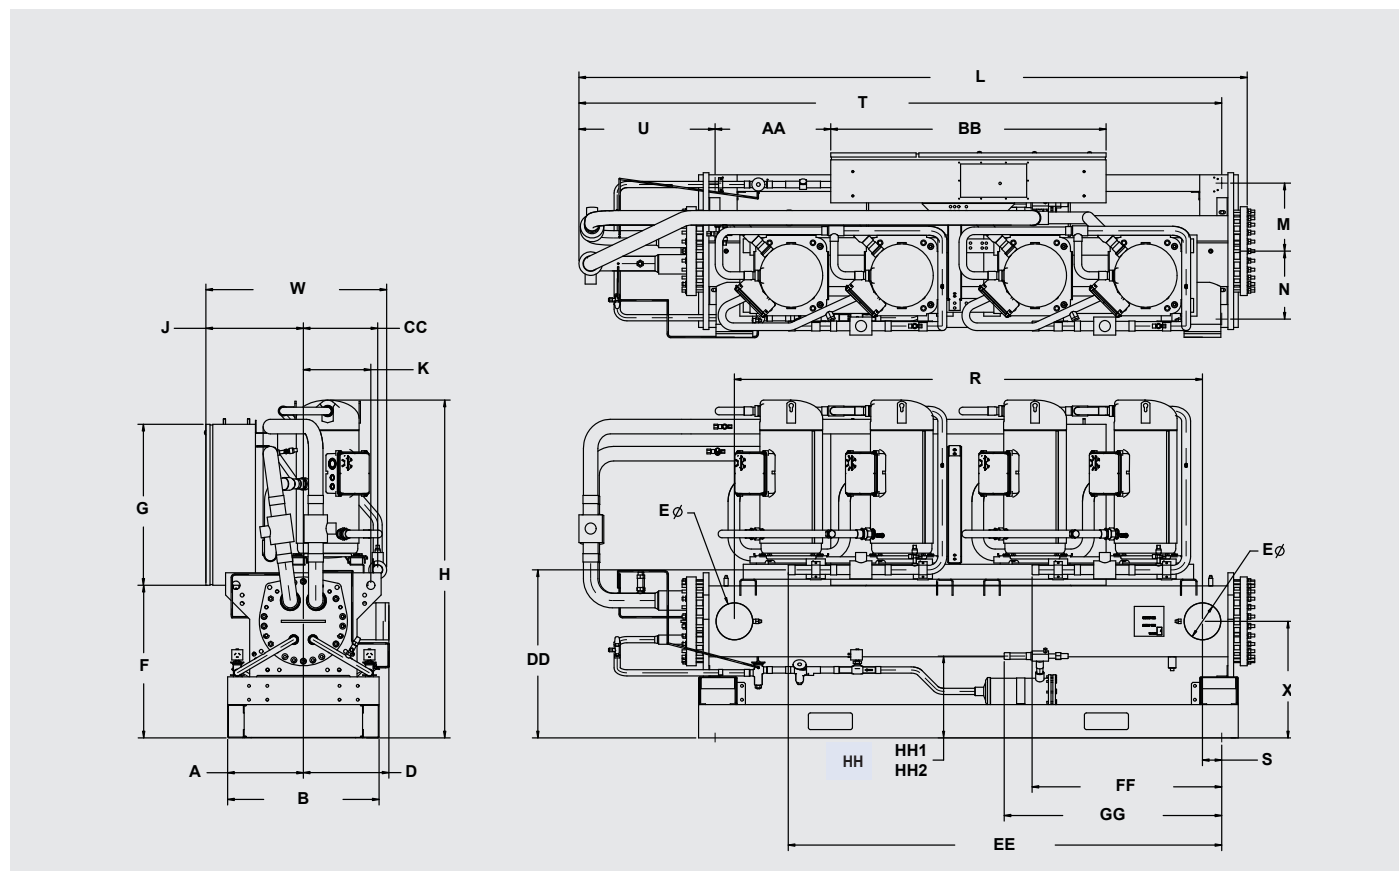


YCRL	0201 HE	0231 HE	0261 HE	0302 HE	0347 HE
W	824	834	834	834	846
H	1437	1616	1546	1544	1613
L	3085	3062	3082	3082	3062
A	349	349	349	349	349
B	699	692	699	699	699
D	299	407	394	394	407
E	219	219	168	168	219
F	622	737	699	699	737
G	737	737	737	737	737
J	450	450	450	450	450
K	311	324	311	311	324
M	311	311	311	311	311
N	311	311	311	311	311
R	2159	2108	2159	2159	2108
S	89	114	89	89	114
T	2965	2938	2965	2965	2938
U	628	601	628	628	601
X	533	565	533	533	565
AA	533	533	533	533	533
BB	1270	1270	1270	1270	1270
CC	343	343	343	343	356
DD	780	838	769	769	838
EE	2059	2085	1999	1999	2008
FF	947	886	875	875	883
GG	1003	1003	1003	965	1040
HH	466	375	375	375	378

All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

YCRL 0386 HE to YCRL 0611 HE

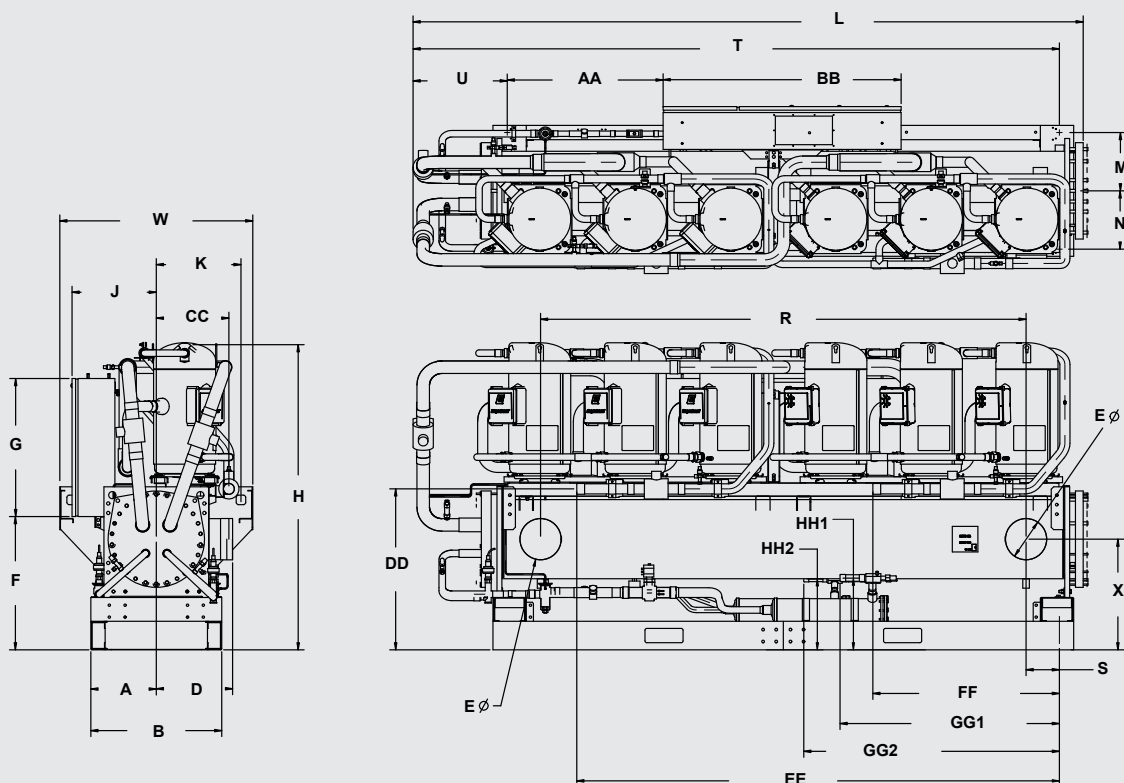

YCRL	0386 HE	0447 HE	0532 HE	0611 HE
W	1030	1030	965	902
H	1641	1628	1641	1641
L	3633	3576	3576	3576
A	349	349	349	349
B	699	692	699	699
D	406	407	407	407
E	219	219	219	219
F	711	711	711	711
G	737	737	737	737
J	450	450	450	450
K	452	452	452	452
M	311	311	311	311
N	311	311	311	311
R	2591	2591	2591	2591
S	178	178	178	178
T	3509	3449	3449	3449
U	563	502	502	502
X	591	591	592	587
AA	832	832	832	832
BB	1270	1270	1270	1270
CC	387	387	387	387
DD	859	859	859	859
EE	2499	2575	2575	2575
FF	919	995	995	995
GG-1	1466	1171	1171	1171
GG-2	1466	1364	1364	1364
HH-1	378	383	383	383
HH-2	378	379	379	379

All dimensions in mm. Drawings not in scale.

YLCS

Remote Air-Cooled and Heat Pump screw compressor

Cooling capacities from 323 kW to 1079 kW

Heating capacities from 397 kW to 1307 kW



Features

Designed to operate with leaving chilled liquid temperature from -4.5°C to $+15^{\circ}\text{C}$ and warm water to 60°C in heat pump.

Efficient compressors

YLCS is a dual circuit chiller with industrial type semi-hermetic screw compressors. Star delta compressor starters are incorporated to reduce the inrush current.

Outstanding chiller control

An advanced microprocessor controller with, a 40 character plain language display, controls and monitors temperatures, pressures, operating hours, number of starts and start stop/holiday times.

Fast and easy installation

Evaporator water connections can be provided in a vertical or horizontal plain.

Electrical power supplies enter from the top for easy drop down wiring.

Options / Accessories

- Compressor suction shut-off valves
- Companion flange kits
- Multi-point power supply
- Remote leaving liquid temperature offset
- Pressure gauges
- Closed transition star delta starters
- Power factor correction capacitors
- Heat pump control up to 60°C
- 90/10 Cu/Ni condenser

Remote Air-Cooled (AA) and Heat Pump (HA) screw compressor

YLCS 0350 to 1120



Remote Air Cooled Chiller (Condenser less)

YLCS-AA	0350	0415	0480	0530	0575	0620
Cooling capacity (kW)	323	383	454	483	520	553
Power input (kW)	92.6	107	126.5	134	144.3	153.7
Full Load Efficiency (EER) (kW/kW)	3.49	3.58	3.59	3.6	3.61	3.6
Evap. Pressure Drop (kPa)	39.8	47.5	26.7	30	40	44.8
Sound Power (dBA)	93	93	93	95	95	95

YLCS-AA	0670	0750	0860	0980	1120
Cooling capacity (kW)	617	713	833	944	1079
Power input (kW)	153.9	175.5	196.6	219.5	250.5
Full Load Efficiency (EER) (kW/kW)	4.01	4.06	4.24	4.3	4.31
Evap. Pressure Drop (kPa)	31.1	46.1	93.4	116	76.5
Sound Power (dBA)	95	95	101	101	101

At 7°C leaving chilled water and condensing at 45°C with 5°C sub cooling.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.

Heat Pump Application

YLCS-HA	0350	0415	0480	0530	0575	0620
Net Heating capacity (kW)	397	469	556	590	641	681
Net Heating Power input (kW)	104.7	121.2	142.9	151	163.5	174.4
Net Heating COP (kW/kW)	3.79	3.87	3.89	3.91	3.92	3.91
Evap. Pressure Drop (kPa)	34.1	41.2	23.3	26.1	35.4	39.6
Cond. Pressure Drop (kPa)	39	32	44.2	34.6	40.4	33.1
Sound Power (dBA)	93	93	93	95	95	95

YLCS-HA	0670	0750	0860	0980	1120
Net Heating capacity (kW)	756	873	1013	1145	1307
Net Heating Power input (kW)	174.4	199.6	225.2	254.7	289.9
Net Heating COP (kW/kW)	4.34	4.37	4.5	4.5	4.51
Evap. Pressure Drop (kPa)	28.9	42.8	87.3	108.5	71.5
Cond. Pressure Drop (kPa)	40.3	31.1	41.1	69.2	89.1
Sound Power (dBA)	95	95	101	101	101

At 12-7°C leaving chilled water and condensing at 40-45°C.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.

Technical data

YLCS			0350	0415	0480	0530	0575	0620
Dimensions	Length	mm	3225	3244	3274		3544	3600
	Width	mm	900					
	Height	mm	2100					
Operating weight kg			3420	4030	4170	4270	4370	4540

YLCS			0670	0750	0860	0980	1120
Dimensions	Length	mm	3565	3645	3830	3830	3830
	Width	mm	1290				
	Height	mm	2148				
Operating weight kg			4510	5010	5620	6090	6610




Manufacturer reserves the rights to change specifications without prior notice.

YVWH

Premium-efficiency VSD water-cooled screw compressor chiller

Cooling capacities from 313 kW to 1228 kW

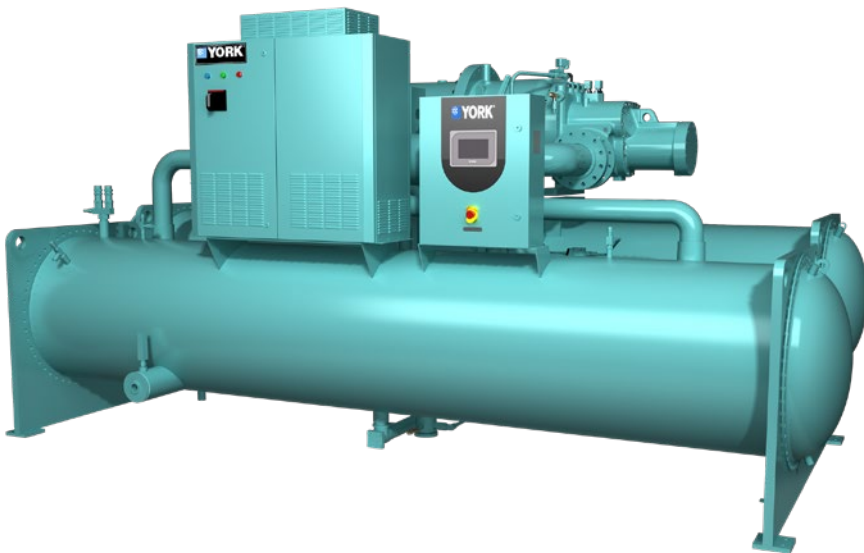

Available as
option



Features

YVWH is innovatively designed and manufactured, it offers **premium efficiency** at both full load and part load condition, helping the customer achieving the greatest value. Thanks to the combination of high efficiency and the use of the new 4th generation **HFO refrigerant R1234ze**, the chiller SEER surpasses the Ecodesign Tier 2 requirement and contributes to the reduction of the CO₂ emissions.

Key components

- Optimized motor and flow structure design ensure high compressor efficiency
- Optimized compressor Vi design further enhances partload performance
- Built-in condenser oil separator increases the oil separation effectiveness
- Counterflow subcooler design provides the most optimized subcooling

Committed to sustainability

- Low GWP solution with new refrigerant R1234ze (GWP = 7, F-Gas)
- R1234ze and R134a refrigerants protect the ozone layer (ODP = 0) and have no phase out date
- Chiller SEER exceeding by far Ecodesign Tier 2 requirements
- Premium chiller efficiency brings green building effectiveness to a remarkable level

Options / Accessories

- Spring Isolators
- Left/Right Pipe Connection
- Sound Attenuator
- Thicker Evaporator Insulation
- Refrigerant Isolation Valve
- Harmonic Filter

Premium-efficiency VSD water-cooled screw compressor chiller

YVWH 115 to 440



Performances (R1234ze)

YVWH			115	145	180	225	260	300	330	375	440
Cooling capacity		kW	313	403	492	602	724	829	884	1037	1228
EER			5.9	6.07	5.84	6.05	6.05	6.19	5.94	6.1	5.96
SEER			7.35	7.43	7.68	7.86	8.25	8.41	8.76	8.76	8.5
η_{sc}			286	289	299	306	322	328	342	342	332
Evaporator	Pass		4				2				
	Flow rate	l/s	15.00	19.23	23.56	28.82	33.11	39.63	42.22	49.54	58.71
	Piping dimension	mm	125		150		200				
	Pressure drop	kPa	44.5	53.6	53.3	51.6	43.0	37.2	19.6	27.1	32.8
Condenser	Pass		4				2				
	Flow rate	l/s	17.56	22.42	27.55	33.61	38.75	46.18	49.53	57.87	68.74
	Piping dimension	mm	125		150		200				
	Pressure drop	kPa	43.6	52.6	52.4	52.4	45.9	32.7	21.7	24.5	34.3
Refrigerant circuit		n.	1								
Compressor quality		n.	1								
Capacity control %			15-100%								
Refrigerant charge		kg	200		240	250	360	370	400	410	510


Ratings in accordance to Ecodesign, fixed water flow and variable outlet (FW/VO). Rated with YW 19.06.
For other Ecodesign calculations or R134a information, please contact your JCI Representative.

Technical data

YVWH			115	145	180	225	260	300	330	375	440
Dimensions	Length	mm	3118	3131	3154	3156	4807	4832	4873		
	Width	mm	1710	1797	1975	2005	1925	1988	2086		
	Height	mm	1966	1996	2124	2250	2300		2320		
Operating weight kg			4387	5169	6350	6951	7834	8894	9306	9983	


Soft Start

YVWH provides a soft start without current shock. The start-up current will never be larger than the rating current, which benefits the customer with lower cost on associated equipment and smaller backup generator and quick start function in case of the shutdown due to power supply failure.

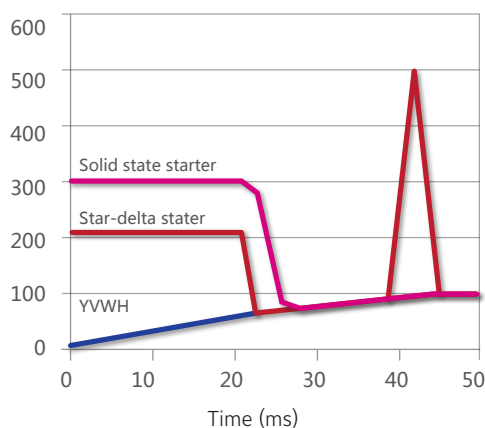

Displacement Power Factor (DPF)


The Variable Speed Drive (VSD) design makes 0.95 high DPF achievable in standard YVWH models at all operating conditions. For traditional non-VSD designed screw chiller, the DPF will reduce when the cooling load goes down.

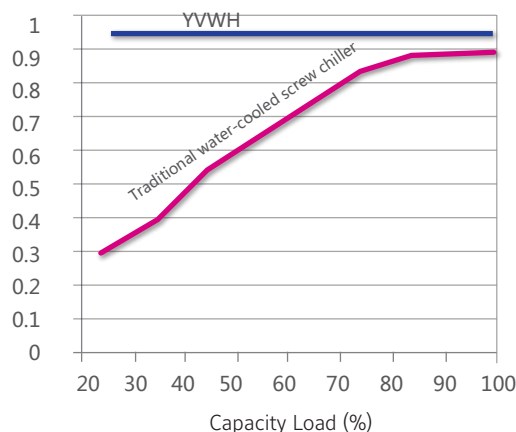

Manufacturer reserves the rights to change specifications without prior notice.

Dimensions and hydraulic connections

YVWH 115/145/180/225

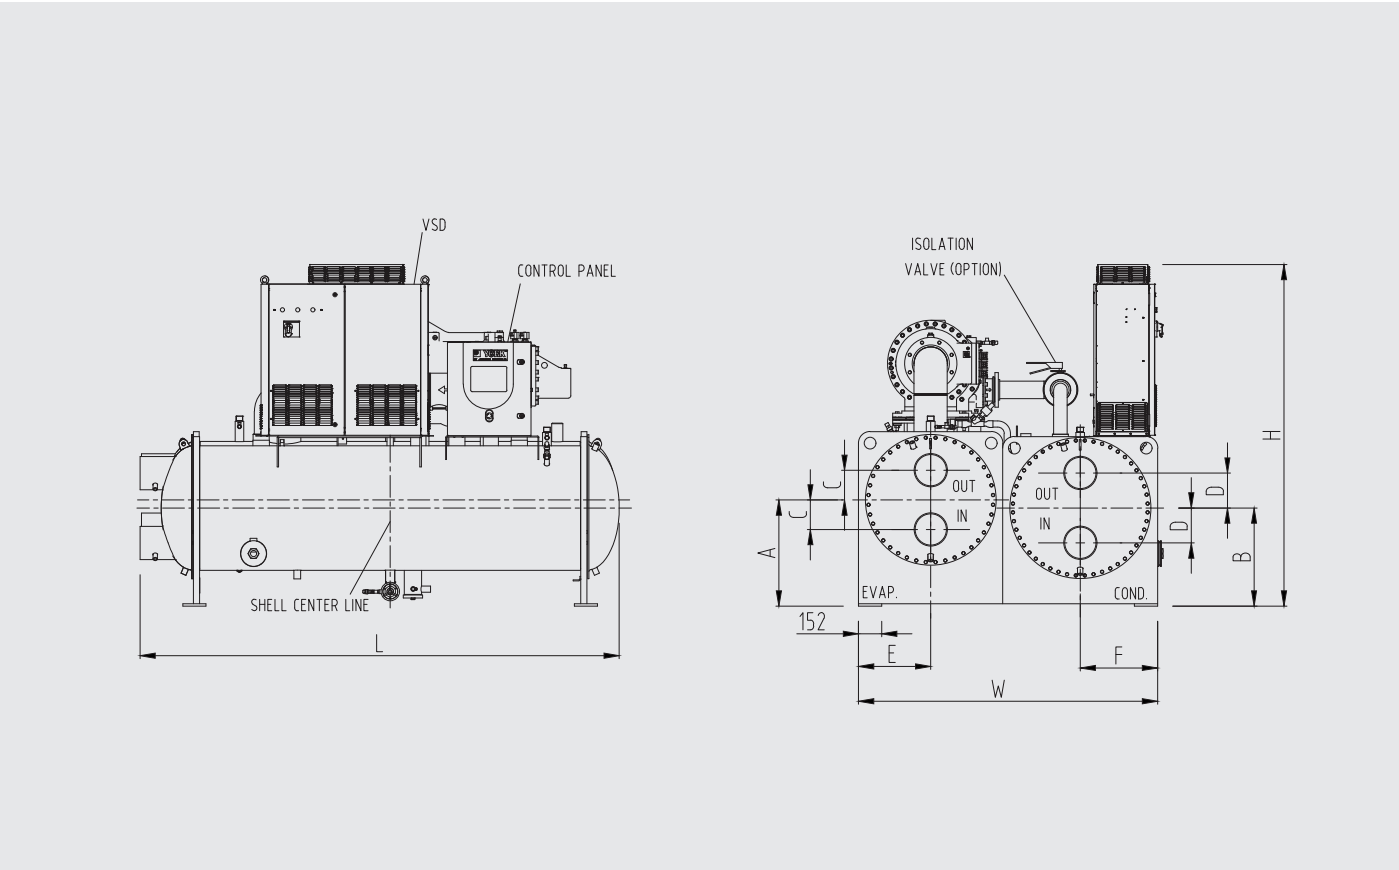


Model	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
YVWH115	3118	1710	1966	644	566	190	180	400	435
YVWH145	3131	1797	1996	694	586	165	180	425	450
YVWH180	3154	1975	2124	709	646	230	230	460	520
YVWH225	3156	2005	2250	699	646	230	230	475	510

All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

YVWH 260/300/330/375/440

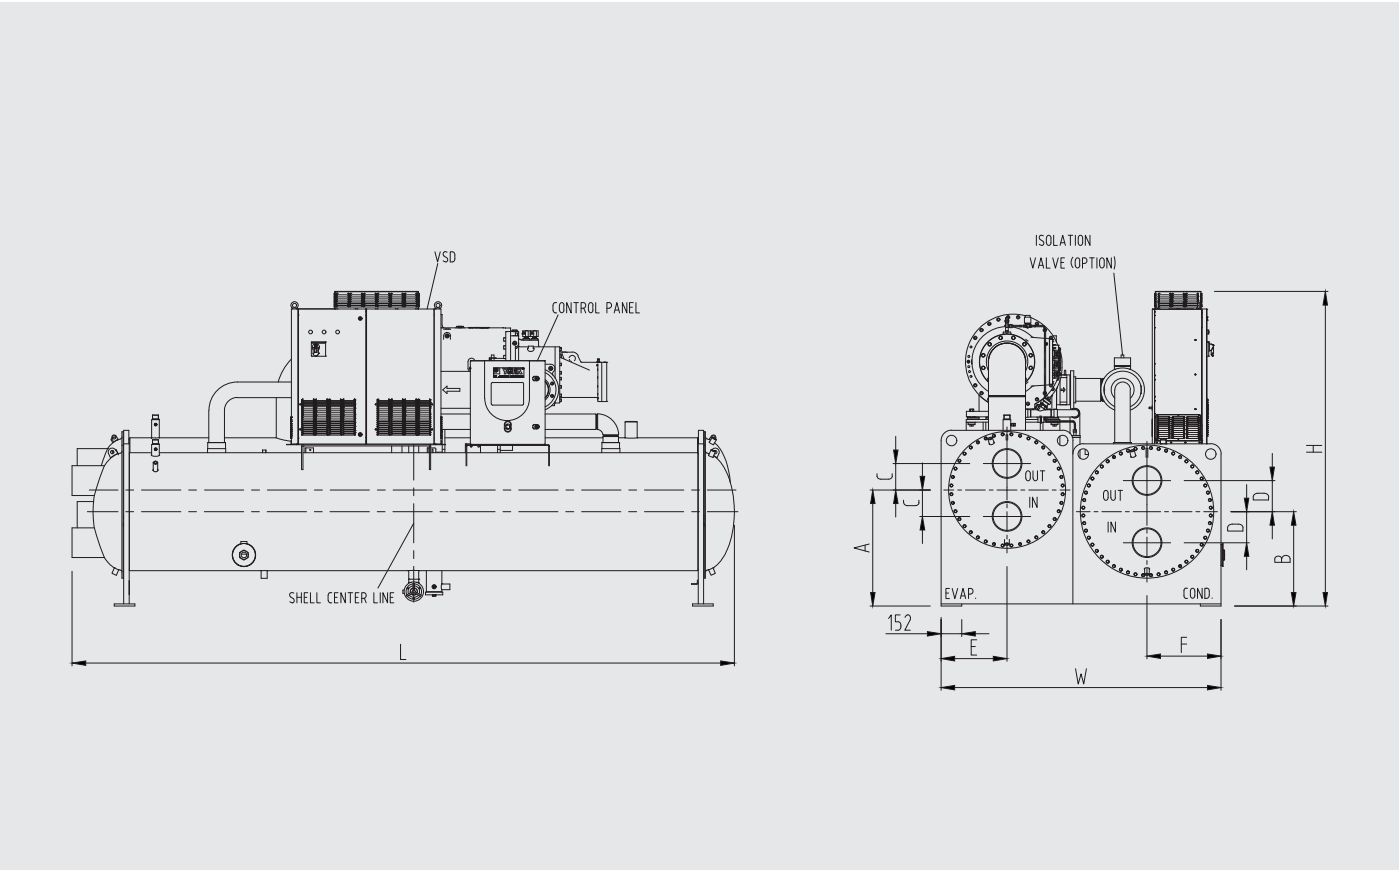

Model	L (mm)	W (mm)	H (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
YVWH260	4807	1925	2300	856	696	195	195	460	485
YVWH300	4832	1988	2300	856	696	195	230	460	520
YVWH330/375/440	4873	2086	2320	856	696	195	229	485	545

All dimensions in mm. Drawings not in scale.

YVWA

Water-cooled VSD screw chiller

Cooling capacities from 545 kW to 1403 kW



Compatible range



Features

Energy Efficiency

The **YVWA** reduces operating expenses with the application of a standard variable speed drive.

Application flexibility

Tailor and tune flexibility makes the **YVWA** ideal for any application from thermal storage to heat pump duty.

Enhanced sustainability


Achieved through high efficiency operation and low refrigerant charges.

Product confidence


Improve your peace of mind knowing our experience stands behind every chiller.

Options / Accessories

- BMS Interfacing options
- Different options of tubes and nozzle arrangements for the heat exchangers.
- Dual pressure relief valve
- Several options for flow switches
- Thermal insulation options
- Anti-vibration mounts options

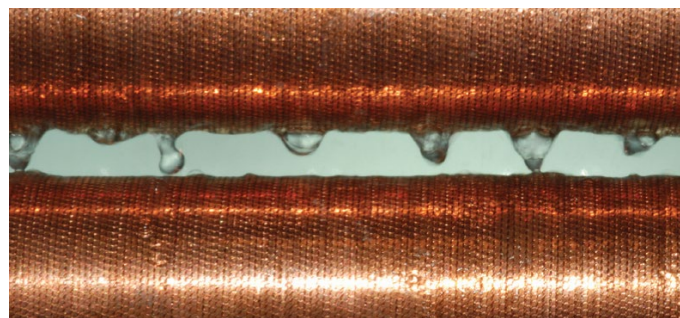

Reduce refrigerant charges by up to 15% beyond traditional chiller designs with the YVWA's falling film evaporator design.

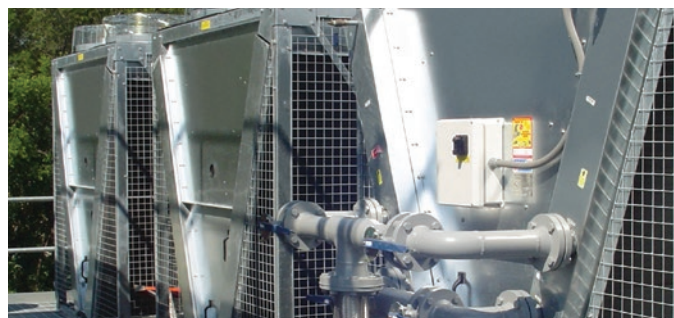

The YVWA chiller can efficiently handle the high condenser pressure required for dry cooling.

Water-cooled VSD screw chiller

YVWA



Application flexibility (*), R513A sample selections

Model	YVWACDCDFX	YVWACDCDGX	YVWAM2M2EE	YVWAM2MCEE	YVWAMBMCCE	YVWAMDMCFE
Cooling capacity (kW)	545	696	822	833	872	966
EER	5.10	4.73	4.27	4.70	4.86	4.81
SEER	6.90	7.11	6.30	6.64	6.85	6.79
ηs, c	268	276	244	258	266	263

Model	YVWAMDMDFE	YVWAMDMEFE	YVWAMEMEFF	YVWANENEFF	YVWAUDUDGF	YVWAUEUEGG
Cooling capacity (kW)	976	978	1067	1084	1246	1403
EER	4.92	4.99	4.91	5.04	5.47	5.42
SEER	7.01	7.08	7.05	7.08	7.71	7.80
ηs, c	272	275	274	275	300	304

Ratings in accordance to Ecodesign, fixed water flow and fixed outlet (FW/FO). For other Ecodesign calculations, please contact your JCI representative.

(*) The taylor and tune models allow over 7000 component combinations in stepless selection capacities / operating conditions. Specific selections may achieve an operating envelope of -10 to +16 °C evaporator liquid and from 18 to 65 °C condenser liquid.

The table above shows only a representative sample of performance points based on generic project operating conditions working with R513A refrigerant (2 pass evaporator, 1 pass condenser). For R134a information contact your JCI Representative.


The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects

Technical data

Model	YVWACDCDFX	YVWACDCDGX	YVWAM2M2EE	YVWAM2MCEE	YVWAMBMCCE	YVWAMDMCFE
Compressors / Circuit(s)	1	1	2	2	2	2
Dimensions	Length	mm	3571	3720	4390	4390
	Width	mm	1413	1413	1405	1405
	Height	mm	1846	1846	1824	1824
Operating weight (kg)	4169	4299	5701	5884	6032	6265
Refrigerant charge (kg)	153	163	250	250	250	255


Model	YVWAMDMDFE	YVWAMDMEFE	YVWAMEMEFF	YVWANENEFF	YVWAUDUDGF	YVWAUEUEGG
Compressors / Circuit(s)	2	2	2	2	2	2
Dimensions	Length	mm	4390	4390	5000	4875
	Width	mm	1405	1405	1405	1730
	Height	mm	1824	1824	1824	1999
Operating weight (kg)	6315	6421	6540	7052	9393	9746
Refrigerant charge (kg)	255	255	260	300	430	440

YVWA Efficiency vs. Ordinary Chiller

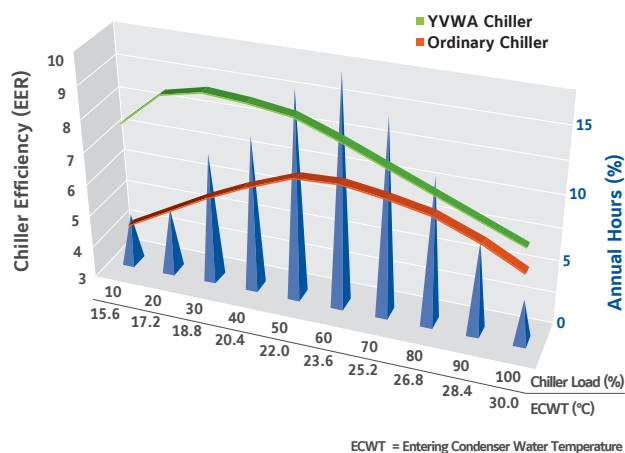

The YVWA chiller delivers superior energy performance at all operating hours.

YVWA Energy Cost vs. Ordinary Chiller

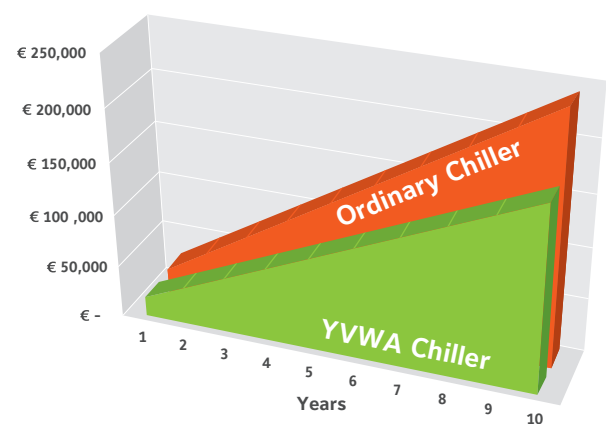

Note: 3,500 operating hours, 0.10 EUR/kWh energy rate, 800 kW design cooling load


An investment in an optimized YVWA chiller reduces energy costs by 25%.



Manufacturer reserves the rights to change specifications without prior notice.


Dimensions and hydraulic connections

YVWA C models

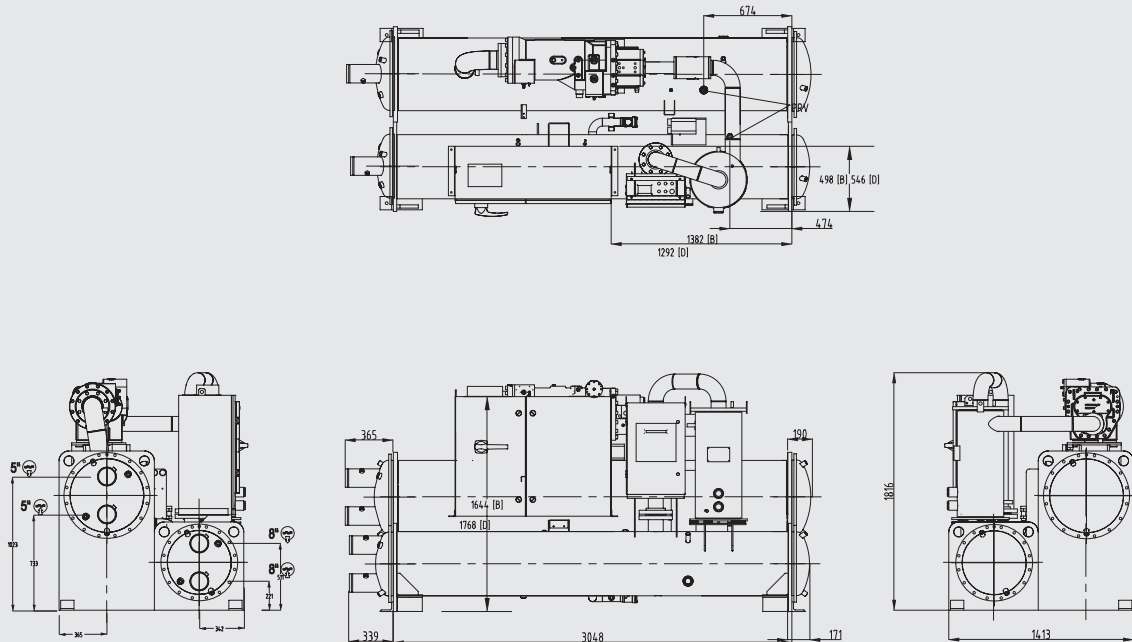

All dimensions in mm. Drawings not in scale.


YVWA M models

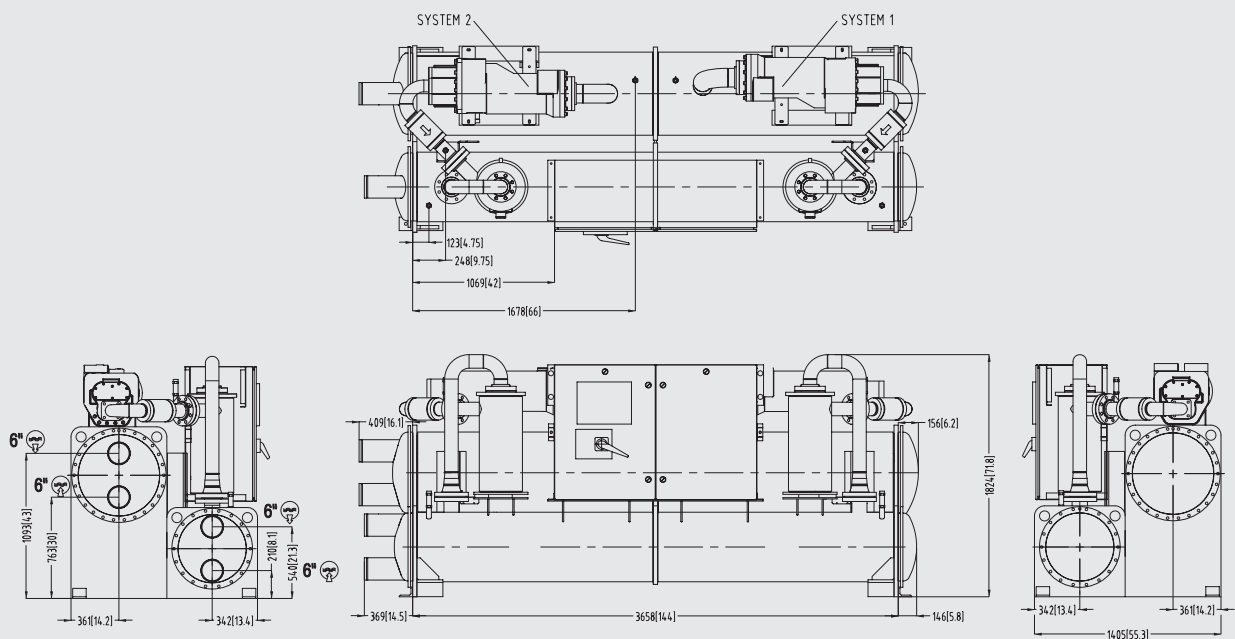

All dimensions in mm. Drawings not in scale.

Dimensions and hydraulic connections

YVWA N models

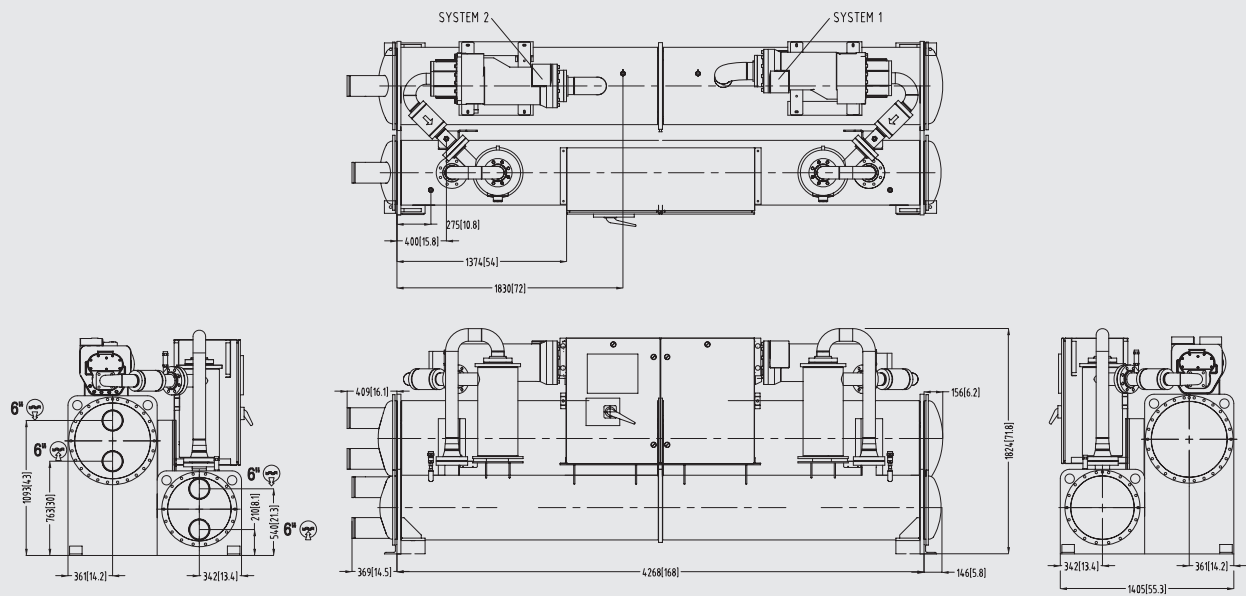

All dimensions in mm. Drawings not in scale.

YZ

Magnetic bearing centrifugal chiller

Cooling capacities from 580 kW to 4500 kW



Features

The **YORK YZ** Magnetic Bearing Centrifugal Chiller is a revolutionary advancement that challenges everything about conventional chiller design. Built upon decades of industry-leading chiller expertise, our engineers questioned every component, analyzed every function and challenged every assumption. The result is the first chiller fully optimized for ultimate performance with a next generation low-GWP (global warming potential) refrigerant, delivering **superior real-world performance, lower cost of ownership and a new definition of sustainability**. It's the first chiller built to exceed every expectation – today and tomorrow.

The design premise for the **YORK YZ** was simple: Don't just make a new chiller – make the best chiller for our customers. This was accomplished through a holistic approach to system design and engineering, optimizing every component around a carefully selected next generation refrigerant for ultimate performance.

Committed to sustainability

- Low GWP solution with new refrigerant R1233zd (GWP = 4.5, F-Gas)
- R1233zd refrigerant protect the ozone layer and have no phase out date
- Chiller SEER exceeding by far Ecodesign Tier 2 requirements
- Premium chiller efficiency brings green building effectiveness to a remarkable level

Magnetic bearing centrifugal chiller

YZ



Proven Firsts


Groundbreaking YORK innovations refined over decades of real-world use have been brought together to create a revolution in chiller design and optimization. It's everything we've learned to-date, and then some.

Variable-Speed Drive:

Four decades ago, YORK introduced the first variable-speed drive (VSD) chiller. And we've since installed more VSD chillers than all other manufacturers combined. A VSD is standard on the YORK YZ.



Magnetic Bearing Driveline:

In 1998, YORK Navy Systems pioneered reliable magnetic-bearing technology to cool submarines. The same durable and efficient technology is used on the YORK YZ.

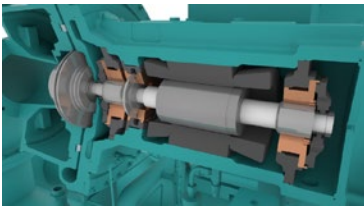

Optimized Compressor:

An optimized, single-stage design enables YORK chillers to provide the best possible real-world energy efficiency. YORK YZ compressors also lead the industry with the widest operating range at off-design conditions where systems most often operate. New advanced aerodynamic system has been designed to operate with low GWP refrigerant R1233zd.

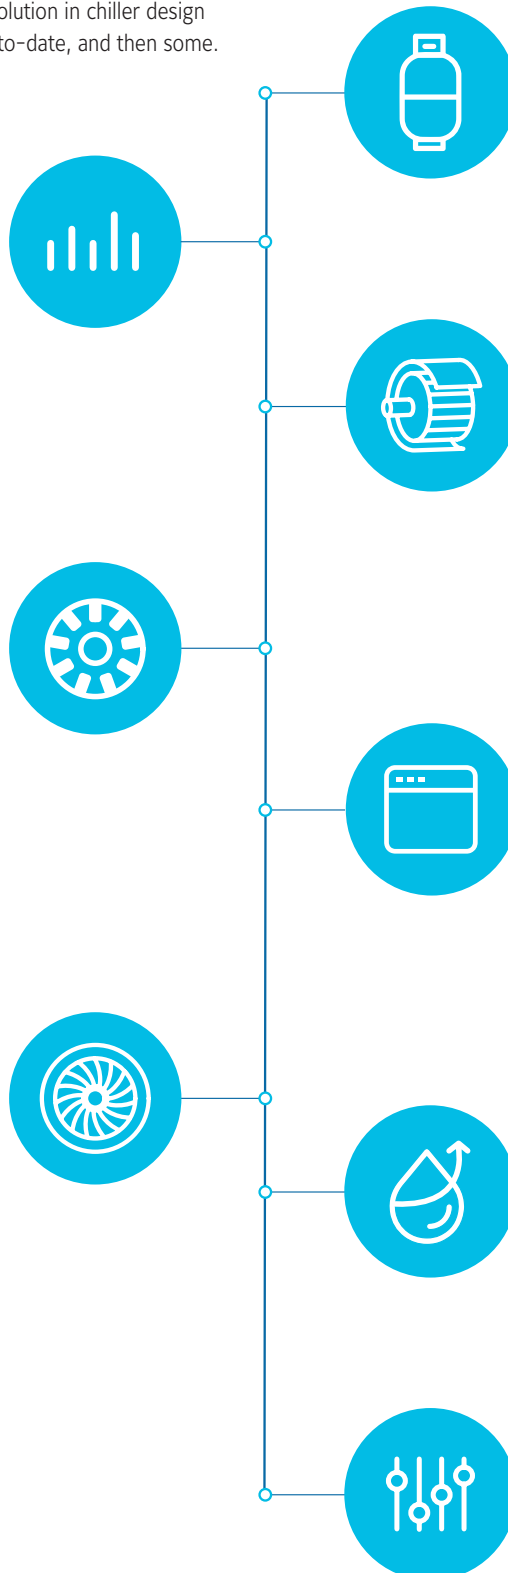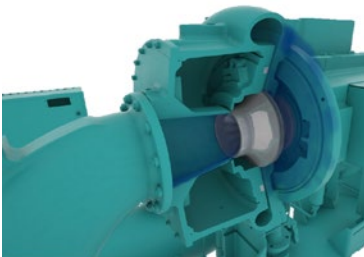

Low-Pressure Chiller:

For most of the past century, the YORK centrifugal chiller portfolio has offered low-pressure refrigerants to deliver high-efficiency chillers. The YORK YZ is designed to maximize the efficiency of a new, low-GWP, low-pressure refrigerant.

High-Speed Hermetic Induction Motor:

YORK was the first to combine low-maintenance, hermetically-sealed induction motors with variable-speed drives in 2004 to directly drive the compressors in air-cooled chillers. The YORK YZ builds on this reliable, proven technology to power our latest generation of centrifugal compressors.

OptiView Control Panel with Connected Service:

The full-color, interactive OptiView control panel of the YORK YZ offers over 100 setpoints, readouts, alerts and trending reports. In addition, data can be securely connected to the cloud-based analytics platform for remote monitoring and predictive diagnostics – another innovation first brought to you in YORK chillers. It is the same control system of YK and YMC².

Falling Film Evaporator:

The YORK-patented falling film design of the YORK YZ reduces refrigerant charge up to 60%, and reduces evaporator shell size up to 20%, compared to other flooded, low-pressure refrigerant designs. The YORK patented falling film design also eliminates the need for a refrigerant pump.

Capacity Control Logic:

This patented YORK control technology provides rapid response to the load on the building, ensuring the YORK YZ Chiller does not waste energy or work harder than needed.



Manufacturer reserves the rights to change specifications without prior notice.

Magnetic Driveline Superiority

The YZ variable-speed drive and advanced magnetic bearing lubrication free design deliver extraordinary efficiency, superior durability, simplified maintenance and a wider operating envelope than any chiller using oil- or refrigerant-lubricated compressor bearings.

Ultimate Performance Efficiency


Thanks to magnetic bearing and lubrication free design YZ can run stably in the whole envelope shown in figure.

It provides highest energy efficiency when running at any low head condition, especially below 16°C water temperature inlet in the condenser (ECWT) where most of conventional chillers cannot operate.

YZ can take benefit of minimum lift applications, with **COP as high as 38**.

In the extra-low ECWT area on the map, running at low lift conditions (e.g. Data center) can occur at higher leaving evaporator temperatures, similar efficiencies can be achieved.

Note: The operating map can vary, please contact your JCI Representative for project specific details.

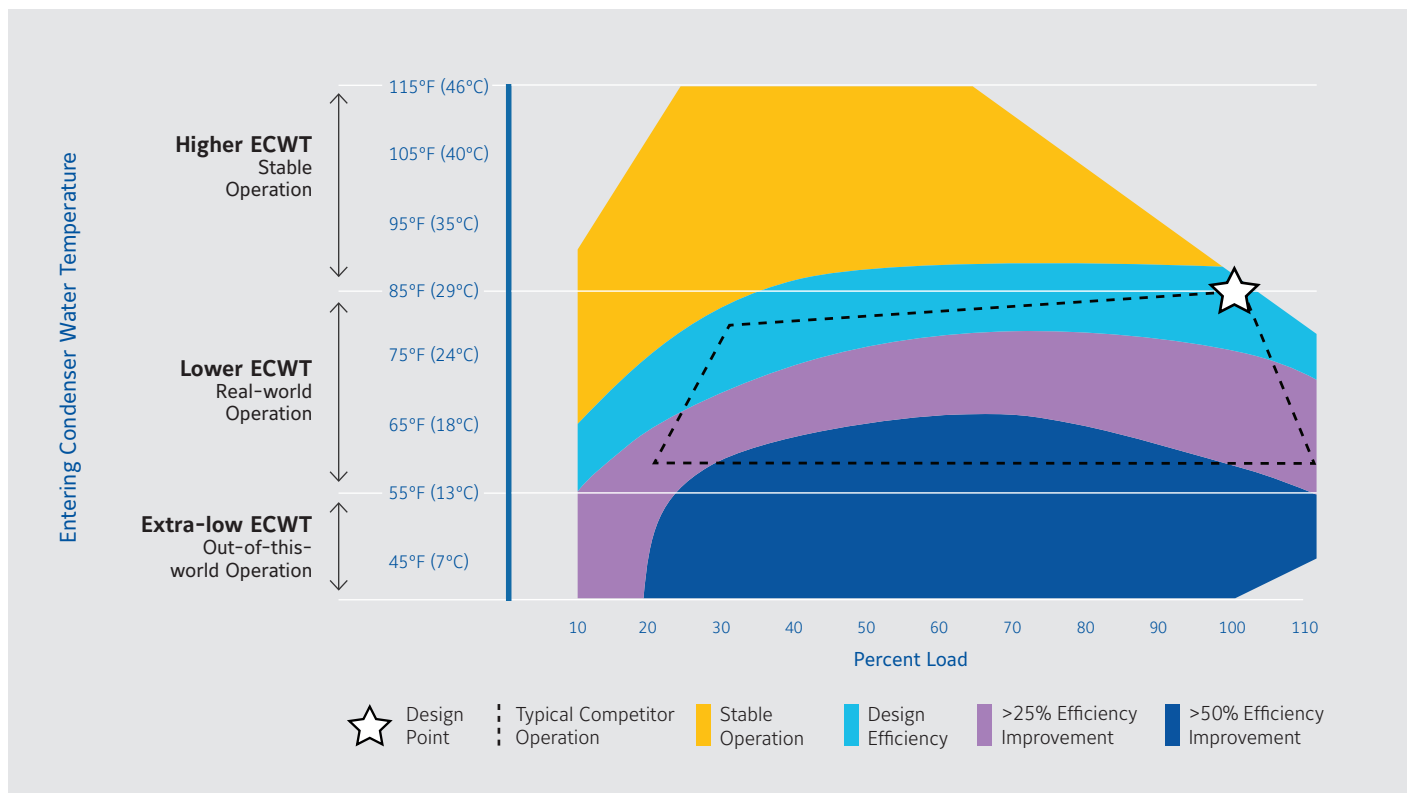

Minimum Driveline Maintenance & Costs of Ownership


YZ driveline features a single moving assembly suspended in a magnetic field that does not require lubrication.

With fewer moving parts than traditional oil- or refrigerant-lubricated drivelines **longevity is enhanced and maintenance is reduced.**

The chart compares driveline maintenance (assuming other scheduled maintenance tasks are equal across centrifugal chillers)

Magnetic bearings and lubrication free designs mean:

- No scheduled compressor/motor teardowns; components are designed to last the life of the chiller
- No required filter changes
- No complex lubrication system maintenance

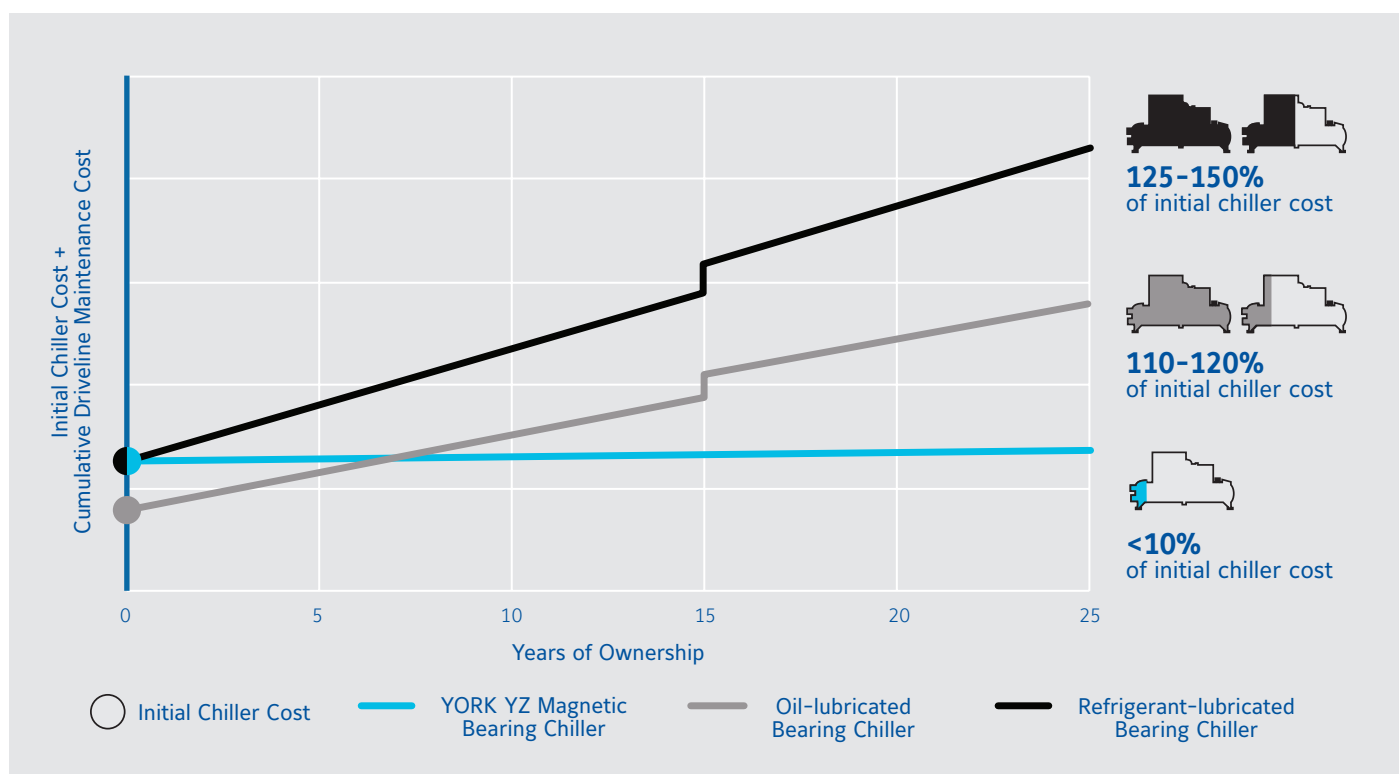

YZ are customized centrifugal units with job specific design. See below table as a reference, within Ecodesign capacity range.

Performances

YZ	900	1100	1300	1500	1600	1800	2000
Cooling capacity (kW)	900	1100	1300	1500	1600	1800	2000
EER	5.99	5.65	6.30	6.00	6.27	6.40	6.10
SEER	8.40	9.00	9.50	9.17	9.00	8.90	9.00
$\eta_{s,c}$ %	328	352	372	359	352	348	352
Sound pressure 1m (dB(A))	74	75	70	78	78	82	83

Ratings in accordance to Ecodesign, fixed water flow and variable outlet (FW/VO). For other Ecodesign calculations please contact your JCI Representative.

The table above shows only a representative sample of performance points based on generic project operating conditions working with R1233zd refrigerant.

For larger capacities up to 4500 kW, contact JCI Representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.

Technical data

YZ			900	1100	1300	1500	1600	1800	2000
Dimensions	Length	mm	4347	4394		4446		5130	
	Width	mm	1776	1880	2099			2356	
	Height	mm	2244	2375	2515	2594			
Refrigerant charge		kg	230	303	319	364	353	462	452


1. All dimensions are approximate. Certified dimensions, shipping and operating weights are available on request.

2. Refrigerant charge quantity and unit weight will vary based on tube count.

YMC²

Water-cooled magnetic centrifugal chiller

Cooling capacities from 800 kW to 3500 kW

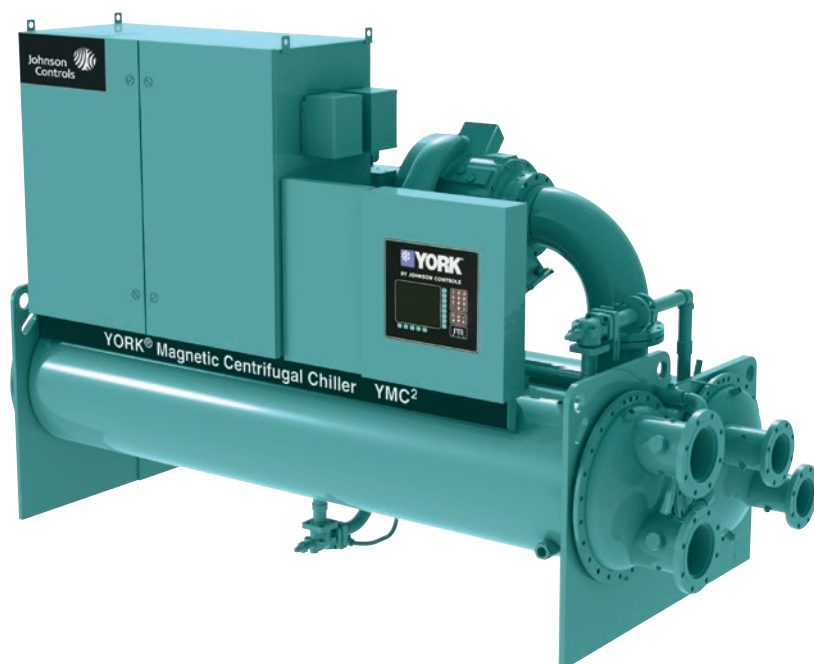

Compatible range



Features

Our most advanced water-cooled chiller offers the following benefits:

Enhanced efficiency

Achieved through application of active magnetic bearing technology with variable speed drive.

Enhanced sustainability


Achieved by leak free refrigerant design, lower refrigerant charge and falling film evaporator.

Low sound levels


Advanced technology results in sound levels as low as 75dBA.

Superior reliability

Use of active magnetic bearing technology removes friction and the need for oil resulting in a quieter and more reliable chiller.

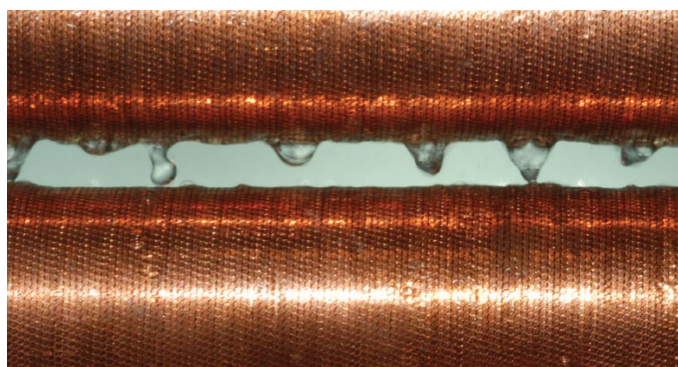

A falling-film evaporator is more efficient because refrigerant is sprayed over the tubes, offering improved heat transfer and reducing refrigerant charge by 30%.

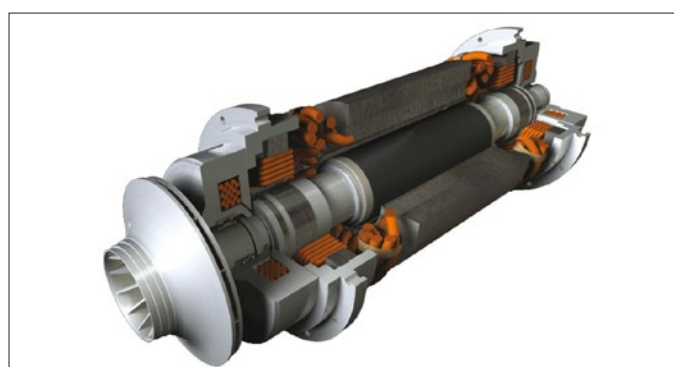

To eliminate mechanical-contact losses in the driveline, the YMC² chiller utilises a permanent-magnet motor and active magnetic-bearing technology.

Water-cooled magnetic centrifugal chiller

YMC² S0800AA to S3500AB



YMC² are customized centrifugal units with job specific design. See below table as a reference, within Ecodesign capacity range.

Performances

YMC ²	S0800AA	S1000AA	S1200AB	S1400AA	S1600AB	S1800AB	S2000AB
Cooling capacity (kW)	800	1000	1200	1400	1600	1800	2000
EER	6.06	6.13	6.32	6.33	6.31	6.07	6
SEER	7.58	7.83	7.92	8.34	8.59	7.83	8.16
η _{s, c}	295	305	309	326	335	305	318
Sound pressure at 1 m (dBA)	77	77	76	76	77	79	80

Ratings in accordance to Ecodesign, fixed water flow and fixed outlet (FW/FO). For other Ecodesign calculations please contact your JCI Representative.

The table above shows only a representative sample of performance points based on generic project operating conditions working with R134a refrigerant.

For larger capacities up to 3500 kW or R513A information, contact JCI Representative.

The above data is based on Johnson Controls' selection software YORKworks 19.05. Please refer to the latest version of the software for specific projects.


Technical data

YMC ²	S0800AA	S1000AA	S1200AB	S1400AA	S1600AB	S1800AB	S2000AB
Dimensions	Length mm	3048				4267	
	Width mm	1880				2007	
	Height mm	2410				2573	
Shipping weight (kg)	5171		5810		6579	7809	
Refrigerant charge (kg)	278	280	423	454	445	612	656

1. All dimensions are approximate. Certified dimensions are available on request.
2. Refrigerant charge quantity and shipping weights will vary based on tube count.
3. Shipping weights are based on fully assembled and charged units.
4. Refer to product drawings for detailed weight information.

Superior sound reduction

A-Weighted sound pressure level (dBA (re: 20μPa))
Measured in accordance with AHRI-575

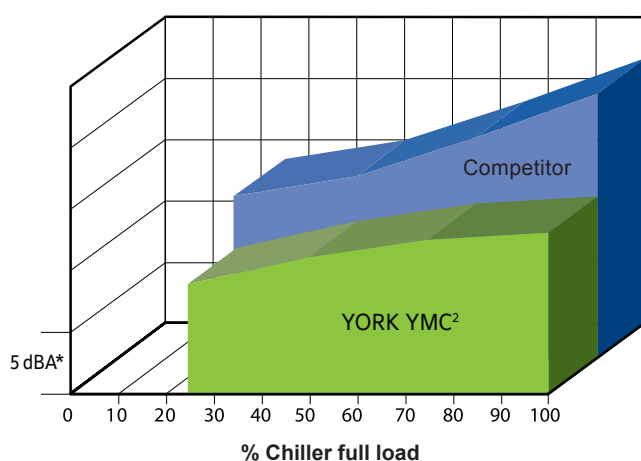

The YMC² chiller is so much quieter than competitive magnetic-bearing chillers, it sounds about half as loud. *Note: each segment on the Y axis = 5 dBA.

OptiView control centre



The OptiView control centre provides complete diagnostics to speed troubleshooting.



Manufacturer reserves the rights to change specifications without prior notice.

YK

Water-cooled centrifugal chiller

Cooling capacities from 800 kW to 11250 kW



Compatible range




Features

- The YORK YK chiller is designed for air conditioning and process applications.
- The high efficiency single-stage centrifugal compressor is powered by an open-drive motor. This provides flexibility to operate the chiller with electricity, steam, or gas depending on utility rates.
- The YK utilizes a falling film evaporator to increase chiller efficiency and reduce refrigerant charges, which makes it ideal for LEED® building applications.
- This chiller is designed for indoor mechanical room installation and it requires a cooling tower for heat dissipation
- The inherent design flexibility of this chiller allows it to be precisely selected for any building load profile.



OptiView panel

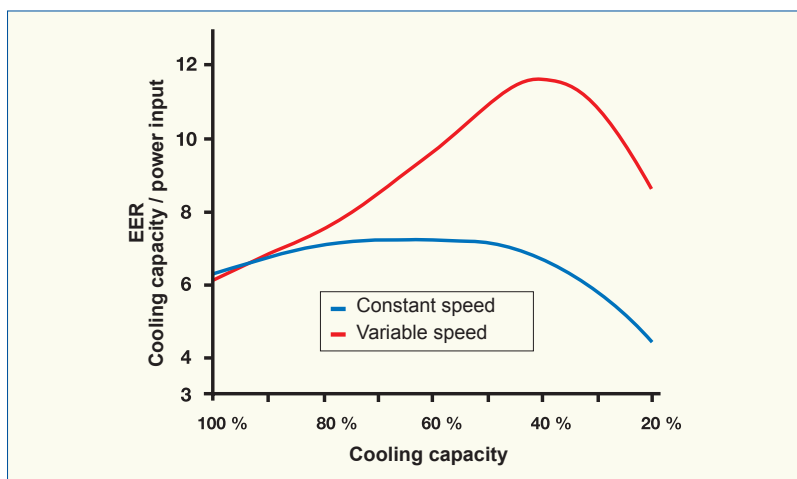

Speed comparison

Water-cooled centrifugal chiller

YK



YK are customized centrifugal units with job specific design. See below table as a reference.

Nominal capacity

Model	Code	Cooling capacity kW
YK	Q3 - Q7	800 - 2100
	P7 - P9	1750 - 2800
	H9	2400 - 3800
	K1 - K7	3200 -9850
YK-EP	K7 & Q3	8800 - 11250

Cooling capacities at 7°C leaving chilled water and 30 °C entering condensed water.
 The table above shows only a representative sample of performance points based on generic project operating conditions working with R134a refrigerant.
 For R513A information contact your JCI Representative.

Heat Recovery

The YK Heat Recovery option can be used for domestic hot water preheat, process heat, facility air reheat, and humidity control. Heat recovery delivers operational savings, CO2 reductions, and reduced water consumption.




Medium Voltage Variable Speed Drive

YORK has a full line of unit mounted and floor mounted Variable Speed Drives, from 380V to 11,000V, to maximize operational savings at off design conditions; which typically occur 99% of the time!



Quick Start (only available for VSD units)


Utilize Quick Start technology to improve chiller starting times and get back to setpoint up to 70% faster than standard chiller designs!

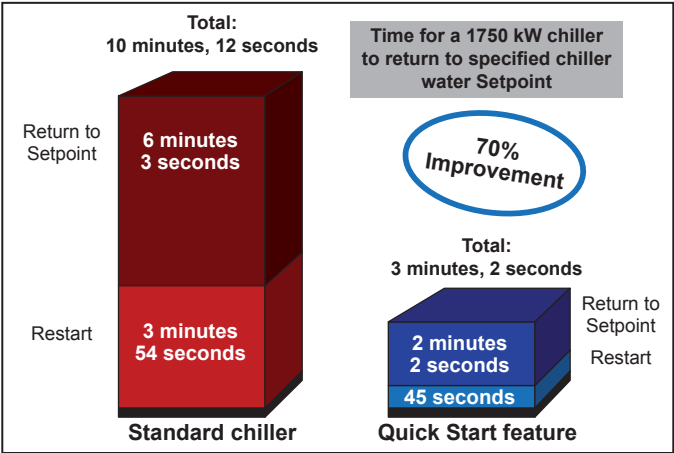

Manufacturer reserves the rights to change specifications without prior notice.

YORK absorption chillers and heat pumps

With innovative 2-step evaporation and absorption-cycle technology

DRIVING HEAT SOURCE	MODEL AND DESCRIPTION	
HOT WATER	Single Effect Hot Water Model: YHAU-CL/CH Capacity: 105 – 6,350 kW Application: Combined heat and power (CHP), commercial cooling, industrial process cooling	
LOW TEMPERATURE HOT WATER	Single Effect Double Lift Hot Water Model: YHAU-CL/CH-DXS Capacity: 176 – 2,813 kW Application: Combined heat and power (CHP), commercial cooling, industrial process cooling	
LOW PRESSURE STEAM	Single Effect Steam Model: YHAU-C Capacity: 422 – 5,275 kW Application: Combined heat and power (CHP), commercial cooling, industrial process cooling	
MEDIUM PRESSURE STEAM	Double Effect Steam Model: YHAU-CW Capacity: 422 – 14,067 kW Application: Combined heat and power (CHP), commercial cooling, industrial process cooling	
DIRECT FIRED	Small Double Effect Natural Gas or Light Oil * Model: YHAU-CG/CA-CXR Capacity: 105 – 352 kW Application: Commercial cooling	
DIRECT FIRED	Large Double Effect Natural Gas or Light Oil Model: YHAU-CG/CA Capacity: 422 – 5,626 kW Application: Commercial cooling, industrial process cooling	

* Utilizes standard cycle

YORK absorption chillers and heat pumps

With innovative 2-step evaporation and absorption-cycle technology

DRIVING HEAT SOURCE	MODEL AND DESCRIPTION	
EXHAUST GAS	Double Effect Direct Exhaust Gas Model: YHAU-CE Capacity: 527 – 5,064 kW Application: Combined heat and power (CHP), commercial cooling	
EXHAUST GAS AND LOW TEMPERATURE HOT WATER	Multi Energy Exhaust and Jacket Hot Water Model: YHAU-CE-J Capacity: 527 – 5,064 kW Application: Combined heat and power (CHP), commercial cooling	
EXHAUST GAS AND LOW TEMPERATURE HOT WATER AND DIRECT FIRED	Multi Energy Exhaust, Jacket Hot Water, Direct Fired Model: YHAU-CGE-J Capacity: Custom Application: Combined heat and power (CHP), commercial cooling	
NATURAL GAS AND LOW TEMPERATURE HOT WATER	Gas Gene-Link Model: YHAU-CG-J Capacity: 422 – 5,626 kW Application: Combined heat and power (CHP), commercial cooling	
MEDIUM PRESSURE STEAM AND LOW TEMPERATURE HOT WATER	Steam Gene-Link Model: YHAU-CW-J Capacity: 422 – 14,067 kW Application: Combined heat and power (CHP), industrial process cooling	
HOT WATER, STEAM, DIRECT FIRED	Low Leaving Chilled Water Temperature (Down to -5°C) Model: YHAU-C-L Capacity: 176 – 1,758 kW Application: Industrial process cooling / refrigeration	
HOT WATER, STEAM, DIRECT FIRED	Absorption Heat Pump (Up to 95°C) Model: YHAP Capacity: Custom Application: District heating, industrial process heating	

The 2-step cycle in YORK absorption chillers

Reliable energy-saving technology, explained.

CONVENTIONAL CYCLE

Another way of thinking about this process is to imagine a rocket ship trying to reach the moon.


In the example here, the rocket ship only has one rocket to push it the entire distance from the earth to the moon – requiring 100% of the fuel. In much the same way, a conventional-cycle absorption chiller only has one evaporator and absorber to overcome cooling output requirements and achieve the cooling load, using 100% input energy.




2-STEP EVAPORATOR/ABSORBER CYCLE

Now imagine the rocket ship has two rockets to share the goal of reaching the moon.


Both rockets need less fuel, since they share the effort to get the rocket ship to its goal. Instead of a single rocket bearing the entire job from point A to point B, two rockets split the effort, allowing for a continuation of effective effort and requiring only 90% of the fuel. This example illustrates the 2-step evaporator/absorber cycle, which allows the evaporator and absorber to achieve the necessary cooling output over two steps while using 10% less input energy.

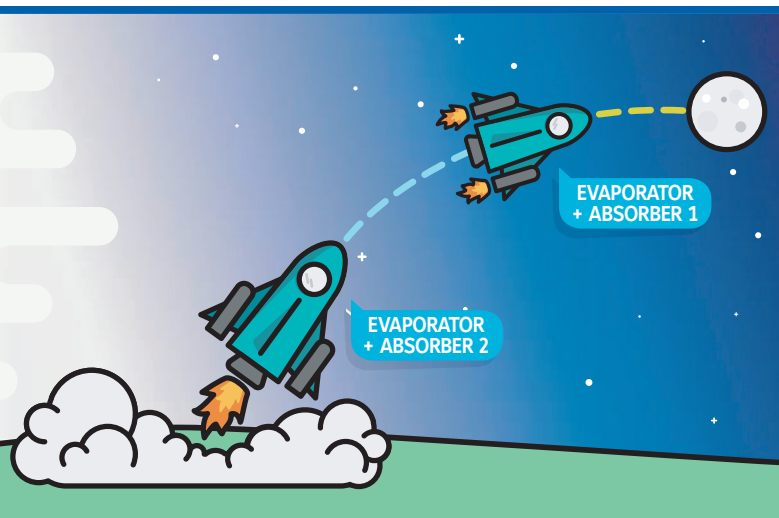


The 2-step cycle evaporator/absorber requires less energy input and a lower salt solution concentration, allowing for increased reliability and 10% energy savings.

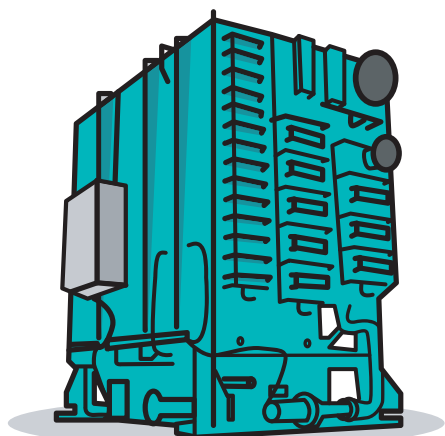

Input Energy Required to Achieve Cooling Load

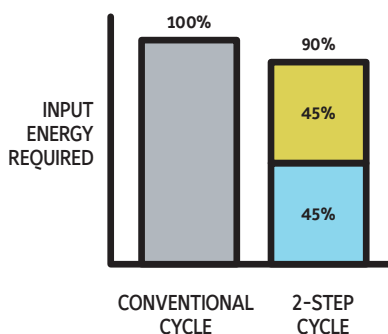

Salt Solution Concentration



Learn more about the benefits of YORK 2-step cycle technology at [YORK.com/Absorption-Chillers](https://www.york.com/Absorption-Chillers)



YORK parallel flow and 2-step cycle absorption chiller technology

A challenge in absorption chiller design is engineering a unit that operates furthest from the crystallization line.



Johnson Controls absorption engineers accepted the challenge with the development of a parallel flow and 2-step evaporator/absorber design technology.

Typical Industry Flow Cycles



PARALLEL

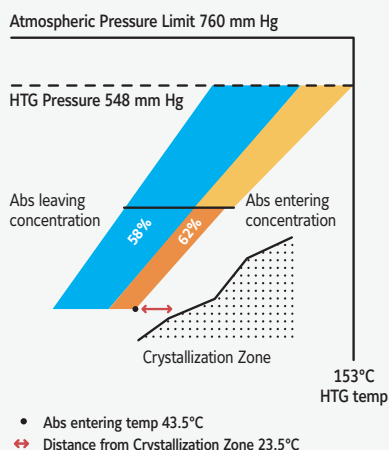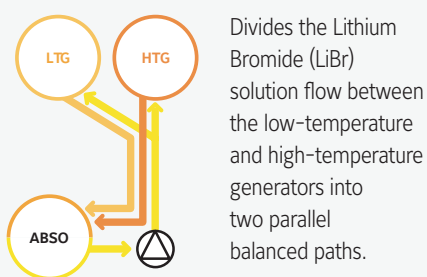


SERIES

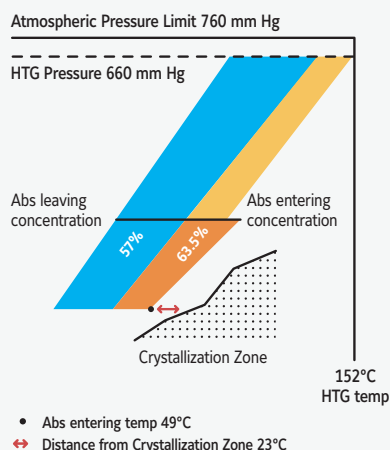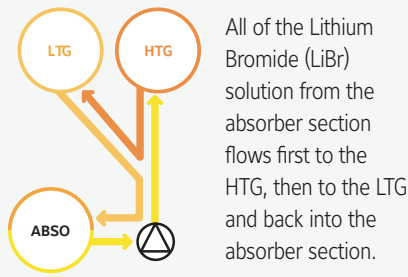

REVERSE

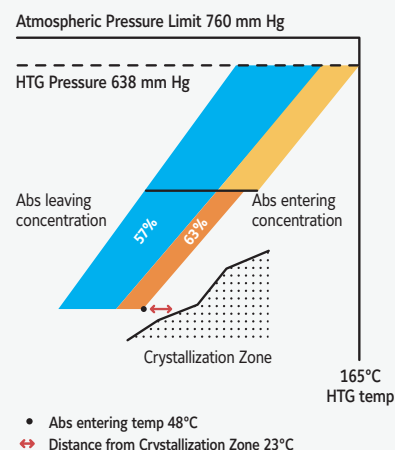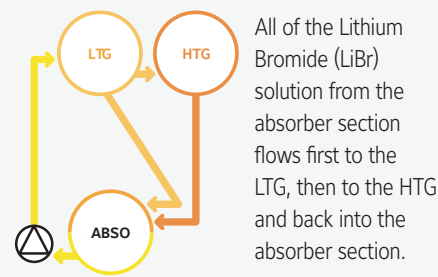

Benefit of Combined Parallel Flow and 2-Step Evaporator/Absorber Technology

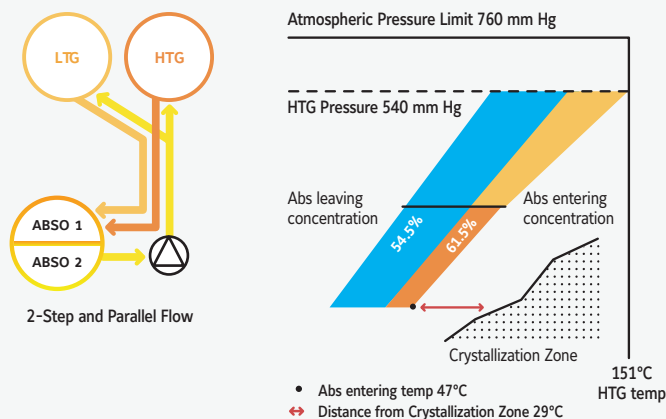

Combining these two technologies, our two-step and parallel flow design provides the lowest temperature, pressure and concentration. Because this design uses a lower LiBr concentration, it is easier to heat in the generator section. Therefore, it requires a relatively lower grade for the driving heat source, providing a high COP.

YORK parallel flow and 2-step absorption chiller technology operates furthest from the crystallization zone for efficient and reliable operation compared to other designs.

Conditions: Chilled water entering/leaving: 12°C/7°C. Cooling water entering: 32°C.
"Absorption Chillers - Practice of new operation management" - 2nd Edition, published by JRAIA, 2017

YHAU CL/CH

Single Effect hot water driven absorption chiller

Cooling capacities from 105 kW to 6350 kW



Features

Flexible Operating Envelope

The **YORK YHAU-CL/CH** Single Effect Hot Water absorption chiller provides efficiency and reliability through the use of innovative technology that is optimized to use low temperature waste heat – as low as 70°C where competitive offerings cannot operate. Common applications include comfort or industrial process cooling that use or recover waste heat from combined heat and power (CHP) systems, industrial process or other available heat sources. The **YHAU-CL/CH** cooling capacity ranges from 105–6,350 kW.

The **YHAU-CL/CH** has the unique ability to be used for applications where the

- Chilled water leaving temperature as low as 1°C.
- Cooling water temperature entering temperature as high as 37°C.
- Hot water temperature, driving heat source, entering temperature as high as 160°C and as low as 70°C.

Refrigerant cycle

The **YORK YHAU CL/CH** high efficiency single-effect absorption refrigeration cycle uses water as the refrigerant and lithium bromide as the absorbent. It is the strong affinity and ease of separation that these two substances have for each other that makes the cycle work. The entire process occurs in hermetic vessels in a near complete vacuum.

Single Effect hot water driven absorption chiller

YHAU CL/CH DXS



Two Step Evaporator and Absorber Design

Efficiency, Reliability, Cost of Ownership

The innovative 2-step evaporator and absorber design is more efficient than a conventional cycle. This ingenious design splits the absorption process into two steps, similar to how a series-counter-flow arrangement splits the work between two chillers. The result of the design allows the **YHAU-CL/CH** to perform the absorption function with lower solution concentrations than conventional designs, increasing efficiency and reliability, and decreasing cost of ownership.

Reliability is enhanced because the solution concentrations are lower leaving the absorber, which allows the entire cycle to operate at lower concentrations virtually eliminating the possibility of crystallization. Efficiency is enhanced because the **YHAU-CL/CH** can take advantage of lower than normal hot water temperatures in the generator. This is because at lower concentrations the solution will boil at a lower temperature in the generator.

Lastly, total operating cost decreases because of the lower concentration of the solution entering the generator, a wider temperature range of hot water can be used, reducing pumping horsepower.

Full Automatic Purging System

As a standard feature, the unit has a fully automatic purging system comprising of electronic vacuum transmitter, solenoid valves and trending capability that ensures design performance and improves reliability. The operator does not have to worry about the sequence of purging for removing the non-condensable gases.

Chiller control

The **YHAU Control Center**, standard on each chiller, provides the ultimate in efficiency, monitoring, data recording, chiller protection and operating ease.

The LCD display allows graphic animated display of the chiller, chiller sub-systems and system parameters; this allows the presentation of several operating parameters at once. In addition, the operator may view a graphical representation of the historical operation of the chiller as well as the present operation. The panel is capable of communication with building management systems and is available in multiple languages.

Nominal capacity

YHAU CL/CH model	30EXE	40EXE	50EXE	65EXE	80EXE	100EXE	130EXE	160EXE	200EXE	255EXE	320EXE	400EXE	500EXE
Cooling Capacity kW	105	141	179	222	271	352	443	563	721	869	1125	1407	1758
COP (low temperature hot water)	0.78	0.78	0.78	0.78	0.78	0.76	0.78	0.78	0.78	0.78	0.78	0.78	0.78

YHAU CL/CH model	630EXW	700EXW	800EXW	900EXW	1000EXW	1120EXW	1250EXW	1400EXW	1500EXW	1600EXW	1680EXW	1800EXW	1900EXW	2000EXW
Cooling Capacity kW	1934	2110	2461	2708	3024	3411	3938	4431	4852	5134	5274	5650	5960	6350
COP (low temperature hot water)	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78	0.78

At 6°C leaving chilled water, 90°C entering generator water, and 27°C entering condenser water.

Technical data

YHAU CL model			30EXE	40EXE	50EXE	65EXE	80EXE	100EXE	130EXE	160EXE	200EXE	255EXE	320EXE	400EXE	500EXE
Dimensions	Length	mm	1750	2100	2500	3050	2200	2600	3150	3800	4600	3250	3900	4700	5700
	Width	mm	1550				1900				2350				
	Height	mm	2100				2500				3200				
Operating weight kg			2900	3300	3800	4400	4700	5500	6500	7800	9100	11300	13300	15500	18600

YHAU CL model			630EXW	700EXW	800EXW	900EXW	1000EXW	1120EXW	1250EXW	1400EXW	1500EXW	1600EXW	1680EXW	1800EXW	1900EXW	2000EXW
Dimensions	Length	mm	5500	6000	6700	7300	8000	6800	7600	8200	8700	9200	9700	10200	10700	11200
	Width	mm	2750					3300								
	Height	mm	3300					3900								
Operating weight kg			22800	24600	26500	29300	31700	43900	46300	48700	50900	53200	55400	58100	60900	63600

YHAU CH model			30EXE	40EXE	50EXE	65EXE	80EXE	100EXE	130EXE	160EXE	200EXE	255EXE	320EXE	400EXE	500EXE
Dimensions	Length	mm	1900	2250	2650	3200	2350	2750	3300	3950	4750	3400	4050	4850	5850
	Width	mm	1550				1900				2350				
	Height	mm	2100				2500				3200				
Operating weight kg			3500	3900	4400	5000	5800	6600	7600	8900	10200	13700	15700	17900	21000

YHAU CH model			630EXW	700EXW	800EXW	900EXW	1000EXW	1120EXW	1250EXW	1400EXW	1500EXW	1600EXW	1680EXW	1800EXW	1900EXW	2000EXW	
Dimensions	Length	mm	5500	6000	6700	7300	8000	6800	7600	8200	8700	9200	9700	10200	10700	11200	
	Width	mm	2750					3300									
	Height	mm	3300					3900									
Operating weight kg			25400	27200	29100	31900	34300	47600	50000	52400	54600	56900	59100	61800	64600	67300	



Manufacturer reserves the rights to change specifications without prior notice.

YHAU CL/CH DXS

Single Effect Double Lift hot water driven absorption chiller

Cooling capacities from 176 kW to 2813 kW



Features

Flexible Operating Envelope

The **YORK YHAU-CL/CH DXS** Single Effect Double Lift Hot Water absorption chiller provides efficiency through the use of innovative technology. It is optimized to use low temperature waste heat – as low as 55°C where competitive offerings cannot operate. Common applications include comfort or industrial process cooling that use or recover waste heat from combined heat and power (CHP) systems, districts heating systems, industrial process or other available heat sources. The **YHAU-CL/CH DXS** cooling capacity ranges from 176–2,813 kW.

The **YHAU-CL/CH DXS** has the unique ability to be used for applications where the

- Chilled water leaving temperature as low as 1°C.
- Cooling water temperature entering temperature as high as 37°C.
- Hot water temperature, driving heat source, entering temperature as high as 160°C and as low as 55°C.
- Hot water leaving temperature as low as 40°C.

Refrigerant cycle

The **YORK YHAU CL/CH DXS** high efficiency single-effect double lift absorption refrigeration cycle uses water as the refrigerant and lithium bromide as the absorbent. It is the strong affinity and ease of separation that these two substances have for each other that makes the cycle work. The entire process occurs in hermetic vessels in a near complete vacuum.

Single Effect Double Lift hot water driven absorption chiller

YHAU CL/CH DXS



Parallel Flow and Two Step Evaporator and Absorber Design

Efficiency, Reliability, Cost of Ownership

The innovative 2-step evaporator and absorber design is more efficient than a conventional cycle. This ingenious design splits the absorption process into two steps, similar to how a series-counter-flow arrangement splits the work between two chillers.

Parallel flow divides the LiBr solution flow between the low- and high-temperature generators into two parallel, balanced paths. One goes to the high temperature generator (HTG), while the other goes to the low temperature generator (LTG).

The result of the design allows the **YHAU-CL/CH DXS** to perform the absorption function with lower solution concentrations than conventional designs, increasing efficiency and reliability, and decreasing cost of ownership.

Reliability is enhanced because the solution concentrations are lower leaving the absorber, which allows the entire cycle to operate at lower concentrations virtually eliminating the possibility of crystallization. Efficiency is enhanced because the **YHAU-CL/CH DXS** can take advantage of lower than normal hot water temperatures in the generator. This is because at lower concentrations the solution will boil at a lower temperature in the generator.

Lastly, total operating cost decreases because of the lower concentration of the solution entering the generator, a wider temperature range of hot water can be used, reducing pumping horsepower.

Full Automatic Purging System

As a standard feature, the unit has a fully automatic purging system comprising of electronic vacuum transmitter, solenoid valves and trending capability that ensures design performance and improves reliability. The operator does not have to worry about the sequence of purging for removing the non-condensable gases.

Chiller control

The **YHAU Control Center**, standard on each chiller, provides the ultimate in efficiency, monitoring, data recording, chiller protection and operating ease.

The LCD display allows graphic animated display of the chiller, chiller sub-systems and system parameters; this allows the presentation of several operating parameters at once. In addition, the operator may view a graphical representation of the historical operation of the chiller as well as the present operation. The panel is capable of communication with building management systems and is available in multiple languages.

Nominal capacity

YHAU CL/CH DXS Model	50DXS	60DXS	80DXS	100DXS	130DXS	160DXS	200DXS	250DXS	320DXS	400DXS	500DXS	600DXS	700DXS	800DXS
Cooling Capacity kW	176	211	281	352	457	563	703	897	1125	1406	1758	2110	2461	2813
COP (low temperature hot water)	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72	0.72

At 7°C leaving chilled water, 95°C entering generator water, and 27°C entering condenser water.

Technical data

YHAU CL/CH DXS Model			50DXS	60DXS	80DXS	100DXS	130DXS	160DXS	200DXS	250DXS	320DXS	400DXS	500DXS	600DXS	700DXS	800DXS
Dimensions	Length	mm	1900	2200	2600	3200	3900	2700	3300	4000	4800	5800	5400	6200	7200	7900
	Width	mm	2100			2200		2500			2600		3000			
	Height	mm	2700					3000					3300			
Operating weight kg			8300	8900	9800	11100	12500	14600	16500	18700	22200	25600	31900	35900	40700	43700



Manufacturer reserves the rights to change specifications without prior notice.

WFC SC

Single stage hot water absorption chiller

Cooling capacities from 17.6 kW to 175.8 kW



Features WFC SC

WFC SC chillers from **Yazaki** are single stage hot water driven chillers. Compared to electrically driven chillers the **WFC SC** series can dramatically lower system operating costs when using waste heat. Applications particularly well suited to the **Yazaki WFC SC** absorption chiller include waste heat recovery from cogeneration or biomass, waste heat from district power station or industry as well as solar thermal. This makes absorption cooling an environmentally friendly and cost-saving alternative to conventional air-conditioning systems. A low electrical energy consumption results in low CO₂ emissions and provide a relief for electricity grids by replacing conventional cooling demand peaks. All chillers are pre-filled and ready for "plug & chill".

Driving heat source hot water

WFC SC units can operate with entering hot water temperature from 70 to 95°C.

Refrigerant cycle

The **Yazaki WFC SC** high efficiency single-stage absorption refrigeration cycle uses water as the refrigerant and lithium bromide (non-flammable, non-toxic, ecologically benign and ozone-friendly) as the absorbent. It is the strong affinity and ease of separation that these two substances have for each other that makes the cycle work. The entire process occurs in hermetic vessels in a near complete vacuum.

Single stage hot water absorption chiller

WFC SC



Nominal capacity WFC SC

Model				WFC SC 05	WFC SC 10	WFC SC 20	WFC SC 30	WFC SC 50
Cooling Capacity		kW		17.6	35	70	105	175.8
Sound pressure at 1 m		dB(A)		46	46	49	52	52
Cold water	Temperature	Inlet	°C	12.5	12.5	12.5	12.5	12.5
		Outlet	°C	7	7	7	7	7
Cooling water	Cooling performance		kW	42.7	85.5	171	256	427
	Temperature	Inlet	°C	31	31	31	31	31
		Outlet	°C	35	35	35	35	35
Hot water	Power consumption		kW	25.1	50.2	100.4	150.6	251
	Temperature	Inlet	°C	88	88	88	88	88
		Outlet	°C	83	83	83	83	83

Technical data WFC SC

Model				WFC SC 05	WFC SC 10	WFC SC 20	WFC SC 30	WFC SC 50
Dimensions	Length	mm		594	760	1060	1380	1785
	Width	mm		744	970	1300	1545	1960
	Height (with mounting plate)	mm		1756	1920	2030	2065	2085
Operating weight		kg		420	604	1156	1801	2650



Manufacturer reserves the rights to change specifications without prior notice.




Central Plant Optimization 10

A facility's central chiller plant typically uses 20% of the building's total energy. Managing this load, while still maintaining occupant comfort, is a primary strategy for overall energy management.

Johnson Controls Central Plant Optimization 10 (CPO 10) provides such a strategy combining expertise from designing YORK chillers and Metasys controls to save energy and improve reliability in the facility.

The application uses tested best practices to select the most efficient combination of chillers, pumps and cooling towers to match the building load. It then commands the selected devices providing the necessary sequencing of pumps, isolation valves and main equipment, while observing safety and stability operation requirements.


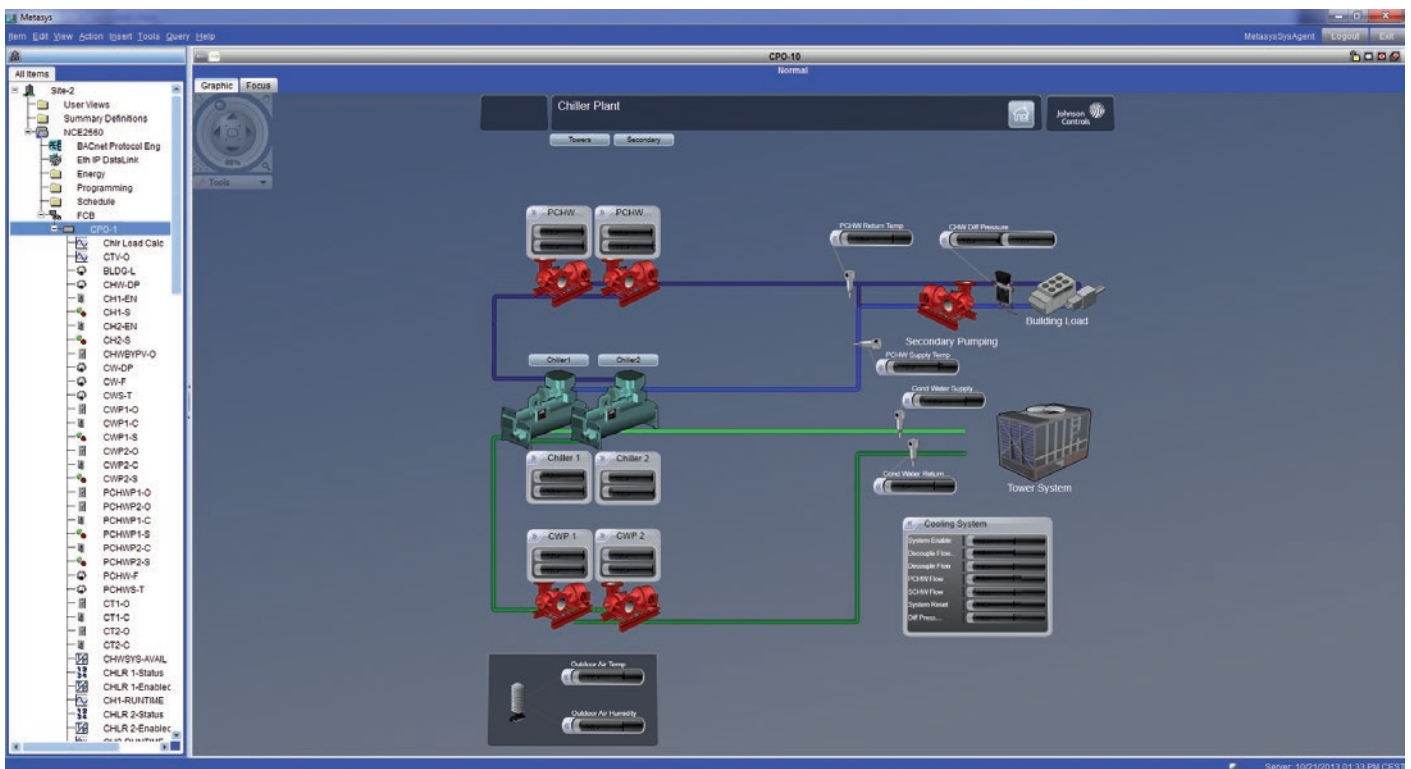


Creating a complex program without programming


The System Selection Tool (SST) is a control program generator that relies on defining the characteristics of the chiller plant and its control strategies. The tool supports **selection and sequencing** of

- up to eight chillers of different sizes, compressor types and fixed or variable speed
- up to eight (each) primary and secondary chilled water pumps of varying pumping capacities
- up to eight condenser water pump
- of cooling towers and bypass valve, including single speed, multi-speed, and vernier control (one variable speed fan with all other tower fans at constant speed)
- up to four heat exchangers (Waterside Economizers)
- both water-cooled and air-cooled chillers

Furthermore, **control definition** for the chiller plant in a single Field Equipment Controller (FEC)/ Network Controller Engine (NCE), if supported by available memory and point Input/Output (I/O), or split across multiple FECs/NCEs, is offered.

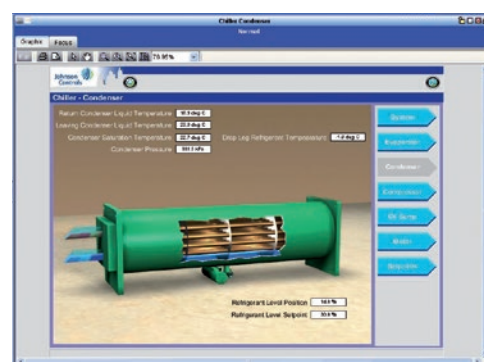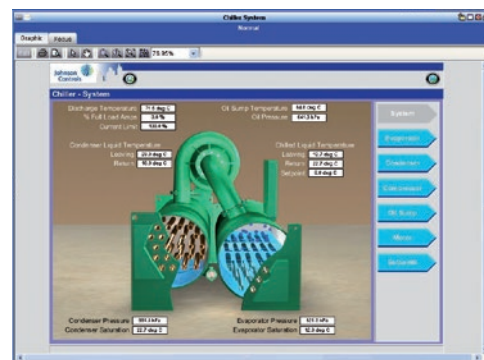

Flexibility, ready for use

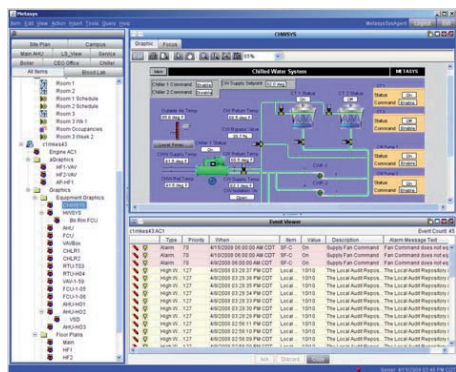

A **variety of primary control strategies** are also available, including


- measuring building chilled-water flow and differential temperature
- chiller load (kW)
- flow through a decoupler pipe in a primary/secondary system
- differential temperature only, in a constant speed chilled water pump system

It is also possible to select **dozens of secondary strategies**, such as

- open loop control of the cooling towers (as defined by the American Society of Heating, Refrigerating and Air-Conditioning Engineers)
- closed loop control of condenser-water setpoint

After making the selections, SST **generates a complete program** by linking together appropriate software modules. This process removes the variability commonly found in totally custom-generated programs using a traditional software program editor.

Once the software modules are linked, the tool allows the entry of all equipment parameters. The resulting program can also be run in a simulator mode to verify proper operation before downloading it into Metasys.

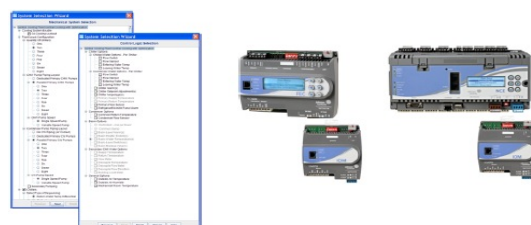

Manufacturer reserves the rights to change specifications without prior notice.

Smart Connected Chillers Services

Predictive maintenance – when uptime is everything

A chiller is one of the most critical pieces of equipment in your facility. It is responsible for the **comfort** of your work & living spaces and the **productivity & well-being** of your people, or **reliability of your process** cooling and the **quality of goods** manufactured. A chiller can also take as much as half of the energy used in your building. This means anything that increases effectiveness impacts on both your spaces and your bottom line.



66% reduction in unplanned or emergency repairs



65% reduction in mean time to repair and money both now and in the future

Smart Connected Chillers Services is enabled by a connectivity panel and an IoT platform that provides you with a range of services that help your business drive operational and performance excellence using:

- Predictive maintenance driven by artificial intelligence
- Remote monitoring by our service experts
- Events and alarms notification



Critical alarms are sent to our ROC





Chiller operating data is sent to the cloud for storage and analysis




Analytics are used to produce Chiller Health Reports



Operating and trend data can be accessed anywhere, anytime by our local, regional and global experts



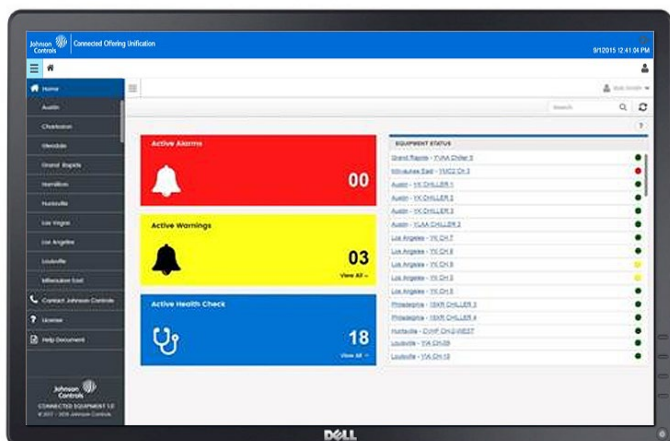

Smart Connected Chillers Services platform establishes a secure connection that sends YORK chillers operational data to a high-security cloud database.

Historical data is continuously analyzed with advanced algorithms to early diagnose abnormal function and events leading up to any failure.

This allows us to both predict and early detect problems such as condenser or evaporator tube fouling, low refrigerant charge and drops in oil pressure, among others, with great accuracy.

Smart Connected Chillers Services helps you to optimize your maintenance strategy. This answers the requirements around your cooling process driven by the chiller plant. Today, your strategy can combine reactive, preventative, and condition-based maintenance with diagnostic services according to the criticality of each asset.

Expanding your current Johnson Controls tailored Planned Maintenance Agreement with a Smart Connected Chillers Services Agreement, you will strengthen the benefits of manufacturer predictive services. This will help to boost your productivity, enhancing uptime and energy savings, to extend asset life and improve the environmental health and safety, and ultimately helping to reduce the total costs of facility ownership.



Ensuring productive environments

Identify faults before they affect occupant comfort or critical operational processes.



Reducing future repair costs

World-class equipment realizes reduced downtime and repair costs by proactively identifying and troubleshooting root causes remotely before resolving the problem.



Extending asset life

Use connectivity to analyze trend data, reduce the risk of undetected failures and identify issues before they become real problems.




Helping to environmental health and safety

Use advanced fault detection diagnostics to identify potential refrigerant loss.



Identifying energy savings

Help identify inefficiencies with enhanced visibility into trend data and current operating conditions.

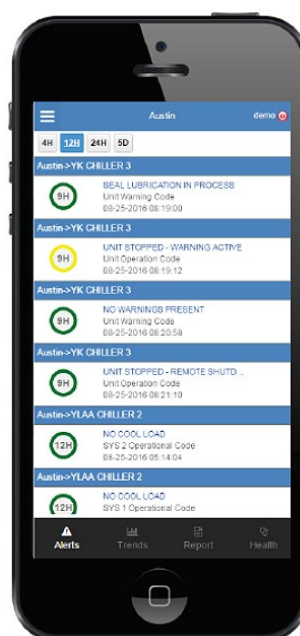

Should you opt in to our Smart Connected Chillers Services Dashboard, you'll benefit from personal access to data on your computer and mobile device



Cyber Security:

All Johnson Controls smart solutions are designed from the ground up with security as a priority. Smart Connected Chillers Services is no different, featuring advanced security measures such as encrypted communications, secure WiFi, minimal external network access and one-way outbound communication.

Heat Pump Solutions

According to the Environmental Protection Agency (EPA), it is estimated that 5% of the world's daily energy consumption is expended on fuel for heating water. Additionally, in Western European countries, 25 % of primary energy used is for cooling and heating applications. As pressure continues on natural resources and energy bills continue to rise, we must seek new, environmentally friendly solutions.

One smart option is to improve the energy utilization of your facility's heating and cooling system by recycling heat energy that would otherwise be rejected. This can be accomplished with a Johnson Controls heat pump.


At Johnson Controls we set standards without compromising our core principles: and when passion and innovation come together, great things happen!

What is a Heat Pump?

Heat pumps are designed to produce hot water at a specified temperature. Heat is extracted from a low-temperature source such as air, ground water, or waste process heat, and its temperature is raised to a level where it can be used in alternative processes.

There are 4 primary system designs for heat pumps:

- 1) **Air-source** – An example of this is the heat pump you may have in your home.
- 2) **Ground-source** – This system uses the ground as the heat source, often used in residential or light commercial applications.
- 3) **Water-source** – This system uses a building's water supply to transfer heat. This is the most commonly used system.
- 4) **Cascade-source** – The system uses heat from existing refrigerant systems or any available waste heat source.

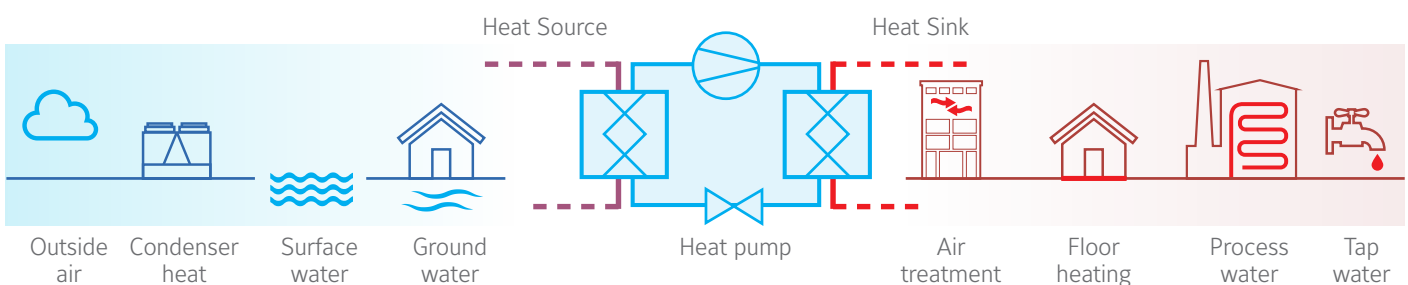

Traditionally, chillers are used to provide a building's required cooling load (rejecting heat to atmosphere via cooling towers) and boilers supply hot water to meet the building's heating needs. Using a Heat Pump gives increased system efficiency and lowers operating expense as they can supplement or even replace existing heating systems, and can also operate in reverse cycle to provide cooling during the summer. There are also processes in which cooling and heating functions perform simultaneously. Again, heat pumps are an ideal solution to this challenge.

Benefits of using heat pumps

Traditional systems used to heat water for hydronic heating and domestic hot water are not energy efficient. Heat pumps offer a number of advantages when compared to fossil-fuel water heaters:

- Higher COPs offer **energy cost-savings above 50%**.
- Thanks to their efficiency and short amortization period, they represent an environmentally compatible and economically attractive alternative to conventional heating systems. **Potential payback of the heat pump can be less than 2 years.**
- **Low operating-cost supplement** to water heaters where total heating requirement exceeds heat pump capacity.
- **Heat pumps can also be used as water chillers**, which means lower first-costs, as one item of equipment performs cooling and heating.
- **Life cycle of over 20 years.**

Johnson Controls heat pumps offer additional benefits by using environmentally friendly HFC and natural refrigerants, with **zero ozone depletion potential, and low global warming potential.**










Reduced operating costs

The best way to compare the efficiency of a heat pump and a water heater is to do a COP analysis. COP equals the energy output (useful heat generated) divided by the energy input (energy supplied to the equipment).

Accordingly, the higher the COP, the more efficient the system – and the lower your running costs!

As an example we can take a 1800 kW water-cooled heat pump as the one showed in chart and compare it to a natural gas boiler. When you compare the efficiency of a boiler to a heat pump, the heat pump comes out way ahead.

In the example given it's possible to save up to 53% in the energy bill vs the traditional natural gas boiler!

Hot Water Requirement	Energy Source	Efficiency	Energy Consumption	Cost of Source*	Cost of Hot Water Requirement	HP Saving vs Gas Boiler
1 kWh 	Natural Gas Boiler 	Average efficiency COP=0.9	 1 kWh / 0.9 1.11 kWh	European Avg. Gas Cost 0.041 €/kWh	1.11 kWh x 0.041 €/kWh 4.5 c€	-
1 kWh 	Air cooled Heat Pump 	Average efficiency COP=3.2	 1 kWh / 3.2 0.31 kWh	European Avg. Electricity Cost 0.12 €/kWh	0.31 kWh x 0.12 €/kWh 3.7 c€	18%
1 kWh 	Water cooled Heat Pump 	Average efficiency COP=5.5	 1 kWh / 5.5 0.18 kWh	European Avg. Electricity Cost 0.12 €/kWh	0.18 kWh x 0.12 €/kWh 2.1 c€	53%

* Cost of Source: Eurostat Statistics web site.










CO₂ footprint reductions

Another benefit that offers heat pump technology is the reduction in CO₂ emissions from fossil fuel use. Heat pumps are a highly efficient electric alternative.

If we refer to the same example with a 1800 kW water-cooled heat pump and compare it to a natural gas boiler, the reduction in CO₂ emissions is impressive.

In fact 1322 tons of CO₂ annually can be saved, which is the equivalent of removing about 278 cars* from the road!

* www.epa.gov/cleanrgy/energy-resources/calculator.html

Hot Water Requir.	Energy Source	Efficiency	Energy Consumption	CO ₂ Source Emissions*	Carbon Footprint	HP CO ₂ footprint reduction vs Gas Boiler
1 kWh 	Natural Gas Boiler 	Average efficiency COP=0.9	 1 kWh / 0.9 1.11 kWh	CO ₂ Emissions 204 g CO ₂ / kWh	1.11 kWh x 204g CO ₂ /kWh 226 g CO ₂	-
1 kWh 	Air cooled Heat Pump 	Average efficiency COP=3.2	 1 kWh / 3.2 0.31 kWh	CO ₂ Emissions 541 g CO ₂ / kWh	0.31 kWh x 541g CO ₂ /kWh 167 g CO ₂	26%
1 kWh 	Water cooled Heat Pump 	Average efficiency COP=5.5	 1 kWh / 5.5 0.18 kWh	CO ₂ Emissions 541 g CO ₂ / kWh	0.18 kWh x 541g CO ₂ /kWh 97 g CO ₂	57%

* CO₂ Source Emissions: UK Department of Energy, Food and Rural Affairs and carbonindependent web site

Reduced water and chemical consumption

When a heat pump is operating we are keeping heat within the building and not rejecting heat to the atmosphere. In other words, we're saving condenser water from evaporating.

So when we look at our same 1800 kW water-cooled heat pump example again, how much water are we saving by not expelling heat to the atmosphere from the cooling tower?

Over 26 million litres anually!

LEED points


Heat pumps will help you and your customers get LEED points. LEED is one of the most recognizable bodies that certifies building designs to demonstrate leadership in environmental impact.

The use of a heat pump also helps accreditation for BREEAM and other similar schemes.



Heat Pumps solutions

We do have a wide range of industrial heat pumps for several capacities and at different temperature levels.

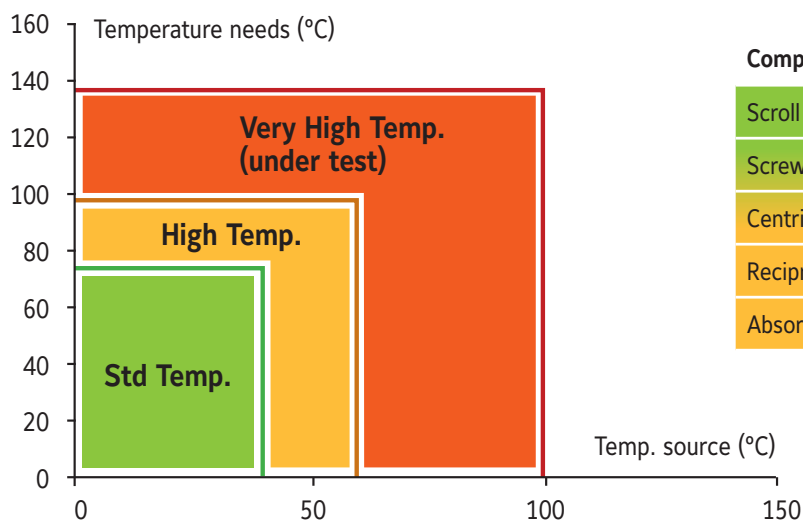

Compressor type	Refrigerant
Scroll	R410A
Screw	R134a, R513A, R717
Centrifugal	R134a, R513A, (SQ R254fa, R1234ze)
Reciprocating	R717
Absorption	R718

Heat pumps with standard temperature



YVAG
Air to water HP
Scroll compressor / R410A
Hot water up to **52°C**
Heating capacity:
10.9 to 18.4 kW



YMPA
Air to water HP
Scroll compressor / R410A
Hot water up to **55°C**
Heating capacity:
50 to 254 kW



YHME
Air to water HP
Twin screw / R134a
Hot water up to **55°C**
Heating capacity:
145 to 186 kW




YLPB
Air to water HP
Scroll compressor / R410A
Hot water up to **52°C**
Heating capacity:
344 to 653 kW



YMWA
Water to water HP
Scroll compressor / R410A
Hot water up to **55°C**
Heating capacity:
24 to 212 kW



YCSE
Water to water HP
Screw compressor / R134a
Hot water up to **55°C**
Heating capacity:
170 to 300 kW




YCWL
Water to water HP
Scroll compressor / R410A
Hot water up to **50°C**
Heating capacity:
200 to 700 kW



YLCS
Water to water HP
Twin screw / R134a
Hot water up to **65°C**
Heating capacity:
440 to 990 kW




YVWA
Water to water heat pump
Screw compr. / R134a & R513A
Hot water up to **63°C**
Heating cap.: 600 to 1000 kW



HeatPAC recip
Variable-Speed Drive
Reciprocating compr. / R717
Hot water up to **70°C**
Heating capacity up to 1200 kW
at 40°C source



HeatPAC HPX recip
Variable-Speed Drive
Reciprocating compr. / R717
Hot water up to **90°C**
Heating capacity up to 600 kW
at 40°C source



HeatPAC
Variable-Speed Drive
Screw compressor / R717
Hot water up to **90°C**
Heating capacity up to 1600 kW
at 40°C source

Customized Heat Pumps



YMC²
Water to water heat pump
Variable speed centrif. compr.
Magnetic bearings / R134a & R513A
Hot water up to **65°C**
Heating cap.: 1600 to 3000 kW



YK HP
Water to water heat pump
Centrifugal compr. / R134a
Hot water up to **50°C (Std)**
Hot water up to **70°C (HP)**
Heating cap.: 1000 to 9000 kW



SHP
Water to water heat pump
Screw VSD compr. / R134a
Hot water up to **80°C**
Heating cap.: 700 to 3000 kW



YHAP-C
Single stage absorption
Steam, Gas or Hot Water driven / R718
Hot water up to **95°C**
Heating cap.: 900 to 40000 kW



HeatPAC Custom
Two-stage cascade VSD
Screw compressor / R717
Hot water up to **90°C**
Reciprocating compressor / R717
Hot water up to **70°C**
Heating cap. up to +3000 kW at 40°C source



CYK HP
Water to water heat pump
Dual-Centrifugal compressors, Series-Arrangement / R134a
Hot water up to **70°C**
Heating capacity from 2500 to 7000 kW



Titan OM HP
Water to water heat pump
Multi-stage Centrifugal, electric, steam or gas driven / R134a
Hot water up to **90°C**
Heating capacity from 5000 to 20000 kW

Manufacturer reserves the rights to change specifications without prior notice.

HVAC Fundamentals

Chilled water systems

Air conditioning system designs normally use supply chilled water temperatures of 5°C to 8°C. Some systems, such as chilled ceilings or beams, may use higher temperatures up to 14°C or 15°C.

If leaving temperatures less than 4.5°C are required, brine solutions are used to prevent freezing. This is specially the case with Ice Storage Systems that can have temperatures as low as minus 7°C.

The cooling capacity of a Chiller increases with rising leaving chilled temperatures. A temperature difference, between flow and return, of 5°C to 8°C is normal.

The water flow volume is dependent on the cooling capacity and chilled water temperature difference in the following formula:

$$\text{Water Flow Volume (Litres per Second)} = \frac{\text{COOLING CAPACITY (kW)}}{\text{Density (kg/m}^3\text{) x Specific Heat (kJ/kg}^\circ\text{C) x Temperature Difference }^\circ\text{C} \times 1000}$$

The resulting water flow must be checked against the flow limitations of the Chiller. This can be found in the "Limitations Table" for each type of Chiller or heat pump (data is not in this catalogue).

A small temperature difference achieves a low MEAN WATER TEMPERATURE which will generally allow the selection of smaller cooling coils in Air Handling Units and Fan Coil Units etc. Conversely water flow volume will be high resulting in a larger circulating pump and increased pressure drop through the Chiller and coiling coils and a consequent increase in operating costs.

The pressure drop varies as the square of the flow and is defined in the following formula:

$$H2/H1 = (W2/W1)^2$$

H1 = Pressure Drop kPa at final condition


H2 = Pressure Drop kPa at original condition

W2 = Flow rate L/s at final condition

W1 = Flow rate L/s at original condition

Selecting the optimum temperature difference is therefore a compromise between operating costs and equipment size and the capital cost of such equipment. Primary chilled water temperature differences are normally between 5°C and 6°C. Generally a minimum system flow volume will provide the least expensive system in both capital and operating costs.

An Air Conditioning system in a building comprises a variety of components, such as Chillers, Air Handling Units, Diffusers, Ductwork, Pipework, Controls, Electrical Wiring, etc.

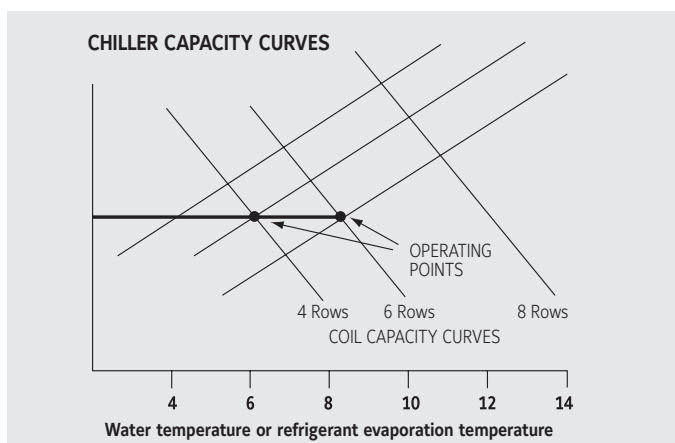

An optimisation of the system price, function and efficiency must consider all components and their interaction. It starts with the load calculation. A floating temperature setpoint in the comfort range area will save energy and reduce operating costs. Capital costs can be reduced by balancing the selection of Chillers, Air Handling Units, Ductwork sizes, etc. It is important to determine the optimum operating point that balances the selection of the Chiller leaving water temperature and the Air Handling Unit cooling coil. A temperature rise of 1°C in water temperature yields approximately 3% more capacity for the Chiller and reduces the absorption input power typically by 1.5%. However the coil capacity reduces with temperature rise and requires larger heat exchange surfaces (more rows and/or a lower fin spacing).

If the leaving water temperature of the Chiller is raised it is possible that one Chiller size smaller can be selected.

The capital cost for the larger coil is comparatively small and the cost savings of a smaller Chiller can be considerable.

Increasing the leaving chilled water temperature will also increase the air temperature leaving the Air Handling Unit coil and this may in turn decrease the supply and return air temperature difference.


The Air Volume is determined by the following formula:

$$\text{Air Volume m}^3/\text{s} = \frac{\text{HEAT GAIN (kW)}}{\text{Density (kg/m}^3\text{) x Specific Heat (kJ/kg}^\circ\text{C) x Temperature Difference }^\circ\text{C}}$$

A smaller air temperature difference will increase the air volume and therefore the duct sizes and resultant cost of the ductwork. It is therefore important to consider the total impact on all the components of the air conditioning system. Lower supply air temperatures will reduce the size of both ductwork and Air Handling Units and specially designed air diffusers can be used to ensure that the lower supply air temperatures have no adverse effect on the building occupants.

Piping system design

On larger air conditioning systems it is generally recommended that "Reverse Return" piping arrangements are used to ensure balanced flow rates.

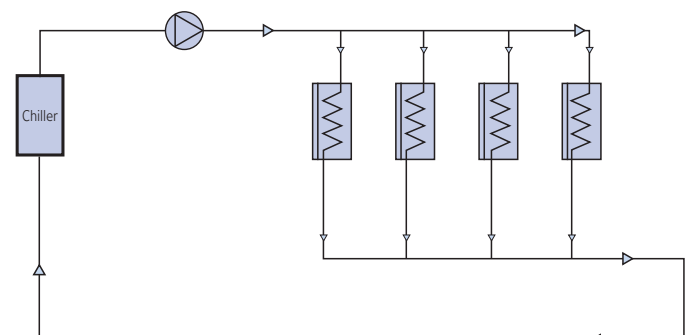

Minimum system water volume

To allow the Chiller or Heat Pump to operate smoothly at low load capacities sufficient thermal storage is required in the primary water circuit to give at least 5 minutes operation when the machine is not running. This will ensure that the equipment will not continuously stop and start at low load conditions and consequently cause undue wear on the compressor.

The following formula will satisfy the total required thermal storage volume:

$$V = \frac{(N \times 60 \times Z)}{4.18 \times dt}$$

V = Total system water content (Litres)(4.18 x dt)

N = Capacity of the Chiller's first capacity step (kW)(4.18 x dt)

Z = Minimum allowable running time (minimum 5 min.)


dt = Temp. difference at the minimum partload condition

$$V = 35.88 \times S \times Q$$

S = Minimum capacity step (at lowest operating ambient)

Q = Full capacity at nominal conditions

Chiller cooler connection

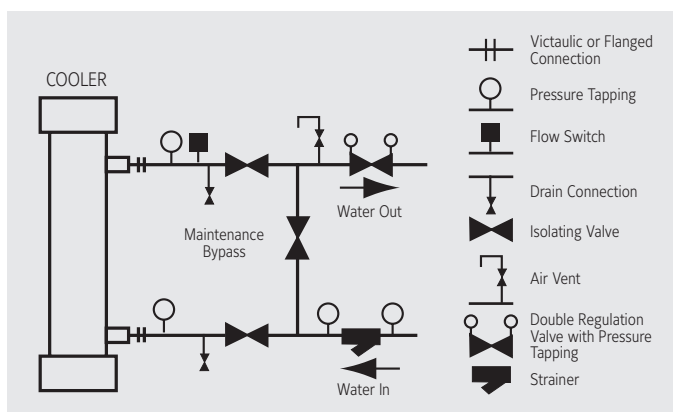

In order to ensure a trouble-free operation of the cooling water pump during startup of the system, the entire cooling water piping should be as far as possible below the operating level of an open circuit cooling tower. This prevents emptying of the cooling water lines in the cooling tower trough.


If multiple cooling towers are used in a common cooling water circuit, compensation pipes must be installed between the cooling tower tanks in order to keep the cooling water in all cooling towers at the same level. If more than one water entry into the cooling tower is required, install throttle valves to balance the flow between circuits. Check that the pressure of the spray nozzles and the pressure of the make-up water are not exceeded.

Warm water system

The leaving water temperature from a Heat Recovery Chiller or a Heat Pump is normally between 45°C and 60°C depending on the refrigerant that the machine is charged with. For Heat Pumps more heating capacity and higher operating efficiency is available with lower leaving water temperatures. Water temperatures of 45°C to 50°C are quite adequate for the selection of heating coils in Air Handling Units and Fan Coils.

Refrigerant to water condensers are limited in the volume of water that can be passed through them and it is necessary that this limitation is considered during the system design process. This may result in a larger water temperature differences than those used in a normal Boiler fed low temperature hot water system. The water temperature can be increased from a Boiler but measures must be taken to ensure that the return water to the Chiller or Heat pump cannot ever exceed 60°C.

Chiller condenser connection

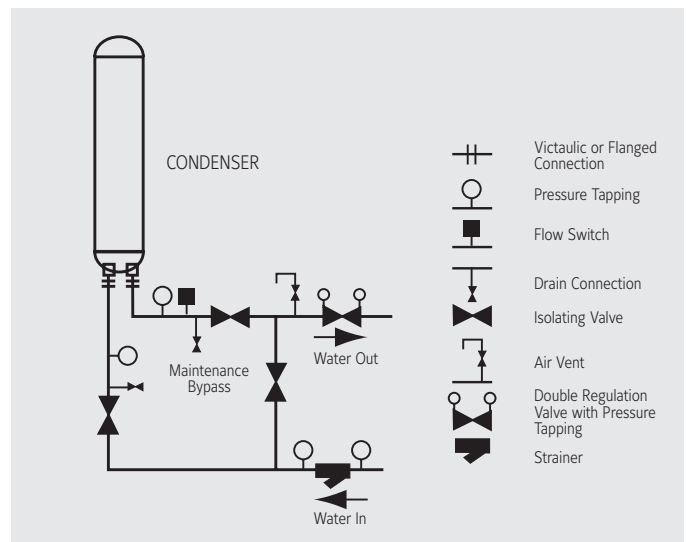


Chiller condenser water systems

To ensure satisfactory pump operation at start-up and to prevent overflowing of the Cooling Tower sump all condenser piping, and as much tower piping as possible, should be installed below the operating level of the tower. If multiple towers are used on a common system equalising lines should be installed between the sumps of the separate Cooling Towers to ensure balanced water level in all the towers. If more than one inlet connection is required to a tower balancing valves should be installed to give the required flow to each circuit.

Check that the maximum spray water and make-up water pressures are not exceeded.


Circulating pump selection

Pumps should have a flat characteristic and should operate near to the left of the maximum point of efficiency on the curve to allow for any deviation in the position of the actual system curve from that estimated in the design process. This will ensure satisfactory pump operation with no overloading of water volume or reduction in available head.

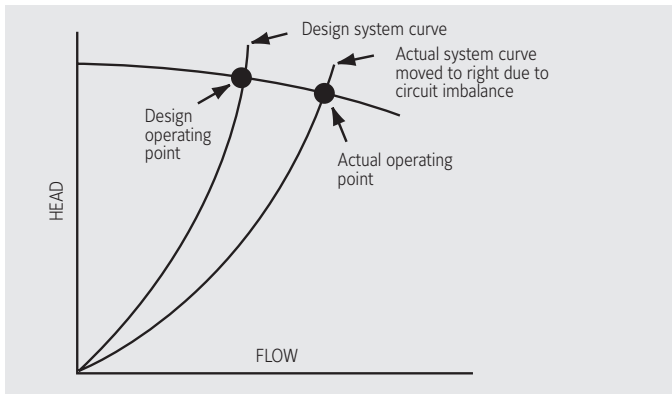


Parallel pumps

When two pumps, of equal flow, are used in parallel they operate at the same head and share the total system flow. When only one of the two pumps is in operation the flow volume can be as much as 80% of total flow resulting in a very good performance for stand-by in case of pump failure.

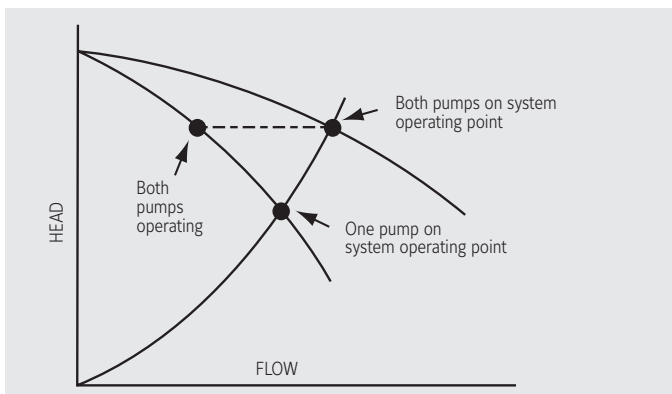

Series pumps

When two pumps, of equal flow, are used in series they operate at the same flow and share the total system head. When only one of the two pumps is in operation the flow volume can be as much as 80% of total flow resulting in a very good performance for stand-by in case of pump failure.

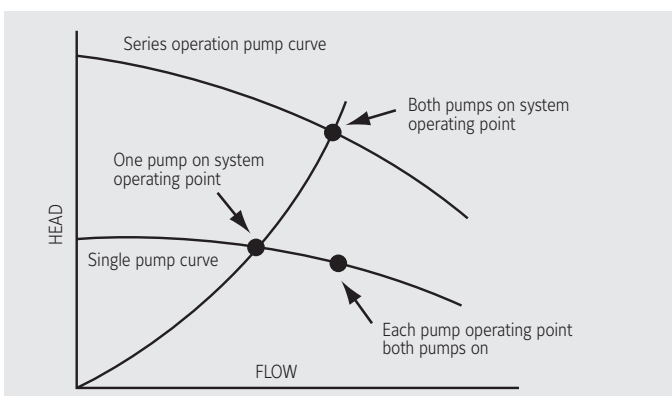

System pressurisation

A diaphragm expansion tank, pre-charged to the system fill pressure and sized to accept the expansion of the water, is normally used in larger water circulating systems. The air charge and the water are permanently separated by a diaphragm that eliminates corrosion and noise caused by air in the system.

Water treatment

Water system problems can be recognised from the following symptoms:

1. A reduction in heat transfer, which is a sign of insulating deposits on heat transfer surfaces reducing the cooling or heating efficiency of the equipment. This can be caused by scale or biological growths.
2. A reduction in water flow which is generally caused by a restriction in pipework, condenser or evaporator tubes or other components due to a build-up of scale. Bacterial and algae accumulate in Cooling Towers and can radically reduce water flow and are a major cause of corrosion. As the water evaporates in a Cooling Tower the dissolved solids originally present in the water remain in the system and suspended solids scrubbed from the air can also contribute to the blockage and corrosion of condenser water pipework and the Chillers condenser tubes.
3. Corrosion of materials or undue wear to pumps, shafts, seals etc. Unless a Cooling Tower is regularly cleaned and protected with adequate water treatment biological contaminants, including Legionella, may be introduced into the re-circulating water.

A water treatment program must be employed to control all possible contaminants. It must be compatible with all the materials of construction and the pH of the circulating water must be maintained between 7 and 9. Biological contamination can be controlled by the use of biocides.

The proper control of water treatment is dependent on the proportional addition of the relevant chemicals to maintain the correct concentration at all times. The relevant chemical treatment of water systems is a complicated matter and it is therefore important that a specialist water treatment company is involved early in the design stage of the project.

Mechanical filtration

A Filter, with a 40 mesh screen, must be installed as close as possible to the water inlet of both the cooler of air cooled and water cooled Chillers and Heat Pumps and the condenser of water cooled equipment. A means of local isolation should be provided. The Filters will also protect the circulating pumps in the system.

Sound

Noise is a major comfort criterion and has considerable effect on the well being of human beings. Noise is generated by friction due to moving parts, compression, explosion etc.,. Mechanical forces create vibration of components which radiate noise in the frequencies of the mechanical source. Deep frequencies cause rumbling which is transported via the structural elements of a building and can be experienced by the sense of touch and body vibrations. Higher frequencies are transported by air. The vibration compresses and expands the air around the noise source and the varying pressure waves are transmitted in all directions.

Sound pressure L_p

Sound pressure is the noise emitted from an object in a series of high frequency pressure waves which move through the air in a similar pattern to the water ripples caused when a stone is thrown into a pond. It radiates outwards from the sound source and is reflected from objects and surfaces in its path.

The magnitude of a sound pressure wave is measured in pascals (N/m^2) but in order to correspond with the human perception of sound. A logarithmic scale is used with decibel (dB) units. Most internationally accepted scales use zero decibels as a sound pressure wave of 0.00002 pascals in height which is approximately the threshold of human hearing. As this is a logarithmic scale each time the size of the pressure wave increases by a factor of ten the decibel scale increases by the number ten, ie., 70 dB represents a pressure wave 1000 times greater than 40dB. This corresponds to the human perception of sound which would also rate the 1000 times increase in sound pressure as a 30 times increase in loudness.

Sound pressure is given the symbol L_p .

$$L_p = n \text{ dB re } 2 \times 10^{-5} \text{ Pa}$$

The human ear can normally detect sound to as low as 2×10^{-5} Pa.

Sound pressure is projected at a specific distance from the source and is effected by the surroundings.

Sound power L_w

Energy is required to generate a sound pressure wave and the size of the wave is directly related to the amount of energy used.

A continuous sound will only be produced if continuous power is available. Sound power can be measured in watts but it is more convenient to use a logarithmic scale and decibel units. As a basis for the sound power scale 1 picowatt is generally taken to be 0 dB. In order to find a measure for noise a ratio is taken between the sound power and a reference sound power of $P_0 = 10^{-12}$ Watts

Sound power is NOT distance dependant.

SOUND POWER IS THE PROPERTY OF THE NOISE EMMITTING OBJECT AND SOUND PRESSURE IS USED TO MEASURE THE PRESSURE WAVES WHICH CARRY THE SOUND TO THE EAR.

Sound power is given the symbol L_w .

$$L_w = n \text{ dB re } 10^{-12} \text{ W}$$

Example:

The human voice has an average sound power of 10^{-6} W.

$$L_w = 10^{-6} / 10^{-12} = 10^6$$

Translated into logarithmic figures:

$$L_w = 10 \times \log 10^6 = 10 \times 6 = 60 \text{ dB}$$

If two sound sources of equal power (60 dB or 10 W each) were active their added sound level would be as follows:


$$(10^{-6} + 10^{-6}) / 10^{-12} = 2 \times 10^{-6} / 10^{-12} = 2 \times 10^6 = 2 \times 10^6$$

$$L_w = 10 \log (2 \times 10^6) = 63 \text{ dB}$$


Therefore: 60 dB + 60 dB = 63 dB.

Therefore if two sound sources have the same sound power add 3 dB.

For several sound sources of having the same sound level refer to the following graph.

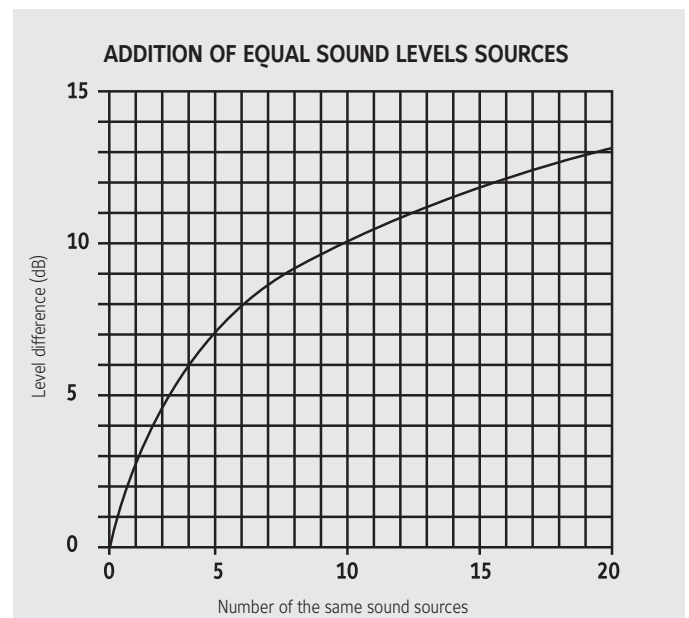

When sound sources of differing sound levels are to be added refer to the following table.

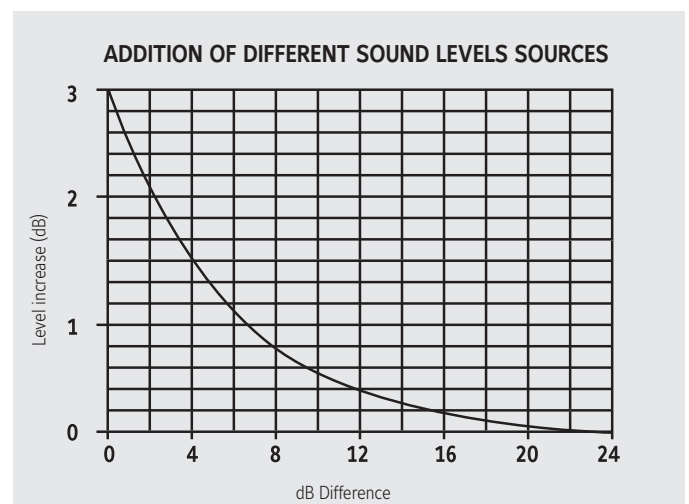

Weighting scales dB(A)

The human ear detects the single frequencies with different intensity and it has therefore been necessary to establish a method that simulates human hearing. In order that a single overall sound output value of an object may be determined a weighted or averaged value, that assimilates human hearing, can be taken of the sound level in each frequency of the frequency band between, the lowest and the highest, which can be heard.

The generally accepted bands are centred on 62.5Hz which is then doubled each time to a peak of 8000Hz (8kHz). These are the octave bands. The most commonly used weighting curve is the "dBA" scale. Weighted dB differences are subtracted from the source frequency band values and the resulting dB(A) value will therefore be lower than the unweighted.

The ratio sound pressure/sound power

The relationship between sound pressure waves and the sound power of the object producing them depends on the nature of the area around the object and the location of the person effected by the sound.


In order to take accurate sound measurements it is preferable to have a "Free Field" environment. This is an area having constant properties, free of boundaries or objects or any other sound source which could effect measurements. The sound waves radiate outwards in concentric hemispheres from the source getting weaker as the distance increases. The average sound level at the surface of one of these hemispheres is directly related to the sound power of the machine which is assumed to be generated at a point at the geometric centre of the machine. If an object is large, relative to the distance from which sound measurements are taken, the sound cannot be considered to be coming from a single point and the sound level will depend on where the subject is standing. The sound level can vary considerably with a small change in position and it is not therefore possible to relate sound pressure to sound power using Near Field measurements.

Site installations are seldom a free field environment. Adjacent buildings, walls etc, affect the sound pressure waves and a wall in close proximity can increase the sound level on the opposite side of the machine by reflecting the sound back in that direction.

Noise criteria (NC) curves

The ear can only perceive the pressure variations of air pressure not the sound power itself. The radiated sound power is transformed into sound pressure, part of which is absorbed by the environment and such objects as carpets, clothes etc, that may be situated within the wave pattern, and the intensity decreases with distance. This effect is called "Room Effect".

The difference between the sound power and the received sound pressure can be read from a diagram. The noise dB curve at the single frequencies is plotted and compared with reference curves. The value of the highest reference line that touches the noise curve is the NC value.

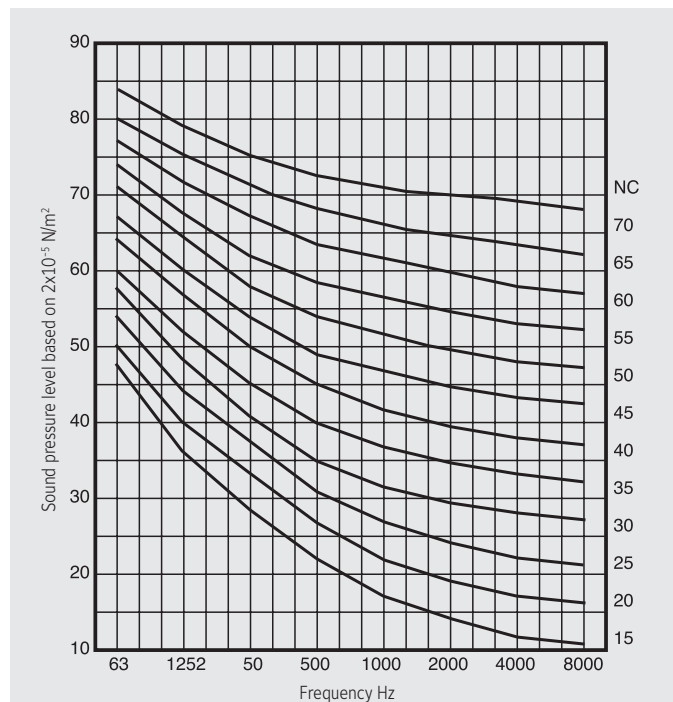

Chiller sound measurement

Chiller sound power

Sound Power is the property of the chiller only and can be used directly to compare the Sound Power of the chillers of one manufacturer against another. Most Sound Power data is quoted with reference to standard ISO 3744 which is entitled ‘Sound Power Levels of noise Sources’ and is sub-titled ‘Engineering methods of determination of sound power levels for sources in free field conditions over a reflective plane’. This standard refers only to Sound Power values.

Sound power values are not distance-dependant

The basic method described by the standard involves averaging a number of sound pressure measurements taken all over an imaginary surface around a chiller in free field conditions.

Providing that background noises are within prescribed limits all of the sound measured at the surface must be coming from the chiller and the sound output (power) can be calculated as follows:

$$L_w = L_p + 10 \times \text{Log}_{10}(S)$$

Where:

L_w = Sound power in dB (reference value: 10⁻¹²W)

L_p = Average value of the sound pressure measurements in dB (Reference value: 2 × 10⁻⁵ Pa)

S = Measuring area in square meters

Chiller sound pressure

Chiller manufacturers use the parallelepiped method (rectangular box) of constant distance D from the surface of the chiller to measure the Sound Pressure. The use of this shape does not change the calculated Sound Power for the chiller.


For example to calculate the sound pressure at 10 metres for a chiller with an ‘A’ weighted overall **Sound Power of 107dB(A) re 10⁻¹²W** and a rectangular surface area at 10 metres distance of 1778 m² using the parallelepiped surface:

$$\text{Sound pressure at a distance of 10 meters} = 107 - 10 \times \text{log}_{10}(1778 \text{ m}^2) = 107 - 32.5 = \mathbf{74.5 \text{ dB(A) (reference value } 2 \times 10^{-5} \text{ Pa)}}$$

Some manufacturers quote sound Pressure levels at a distance of one metre. When a chiller can be anything up to 10 metres in length this distance is illogical, as the sound level will change depending upon the position along the unit. That is near to the compressor will be noisier than near to the control panel etc, Even a distance of 5 metres is too close in the case of very large chillers.

DEDUCTION FROM SOUND POWER LEVEL TO OBTAIN SOUND PRESSURE LEVELS AT VARIOUS DISTANCES FROM A CHILLER

Distance "D" in meters	5	10	25	50
Deduction from sound power	-28	-32	-39	-45

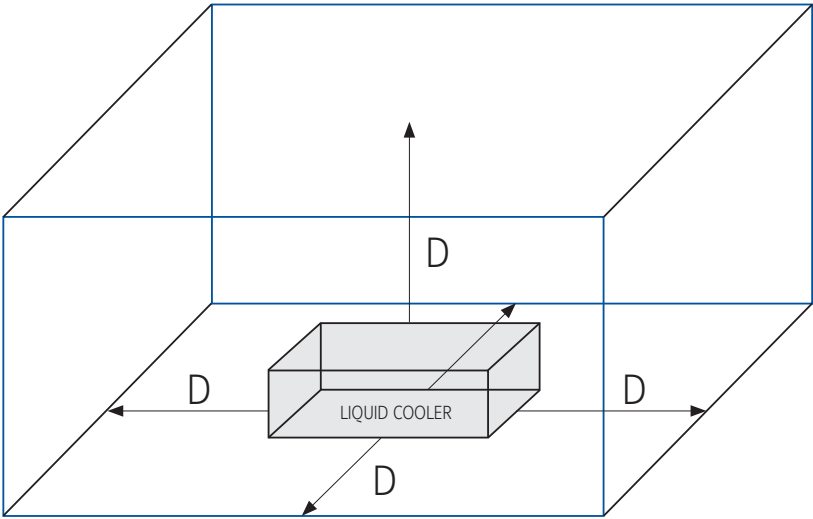

ECODESIGN LABEL REGULATION

Our commitment to the environment

At Johnson Controls, we've been dedicated to protecting the environment since our invention of the electric thermostat in 1885, which provided a fundamental shift in the energy efficiency of buildings. Now, all over the world, our products and services empower customers and communities to consume less energy and conserve resources.

This commitment is in line with the targets of the European climate and energy package for 2020:

The 5 targets for the EU in 2020


- 1. Employment**
 - 75% of the 20-64 year-olds to be employed
- 2. R&D**
 - 3% of the EU's GDP to be invested in R&D
- 3. Climate change and energy sustainability**
 - greenhouse gas emissions 20% (or even 30%, if the conditions are right) lower than 1990
 - 20% of energy from renewables
 - 20% increase in energy efficiency
- 4. Education**
 - Reducing the rates of early school leaving below 10%
 - at least 40% of 30-34-year-olds completing third level education
- 5. Fighting poverty and social exclusion**
 - at least 20 million fewer people in or at risk of poverty and social exclusion

Source: http://ec.europa.eu/europe2020/index_en.htm



Energy Efficiency Improvement Targets strongly influence the HVAC Market


Buildings today are the largest consumers of energy, and HVAC systems account for a significant portion of a building's energy consumption. Providing customers with energy efficient solutions is a key development opportunity for the HVAC industry.

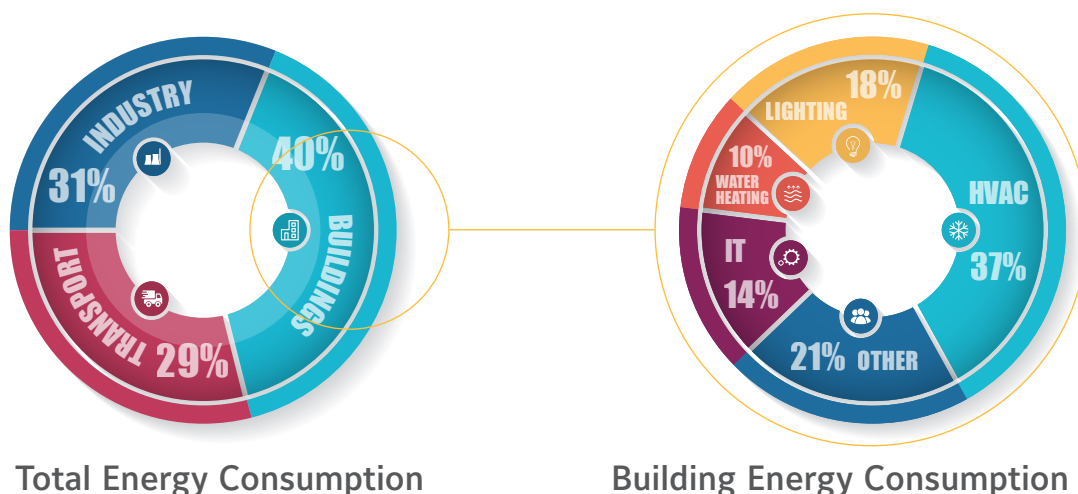

The Regulatory Response

The European Union has developed the Ecodesign Directive 2009/125/EC & the Energy Labelling Directive 2010/30/EC to address the environmental impact of all Energy related Products (ErP) beginning at the earliest stages of design. YORK Chillers and Heat Pumps are currently affected by this directive and have to be compliant at every stage in order to receive the CE mark.

The EU framework for Energy Efficient products' "push and pull effect" on the market

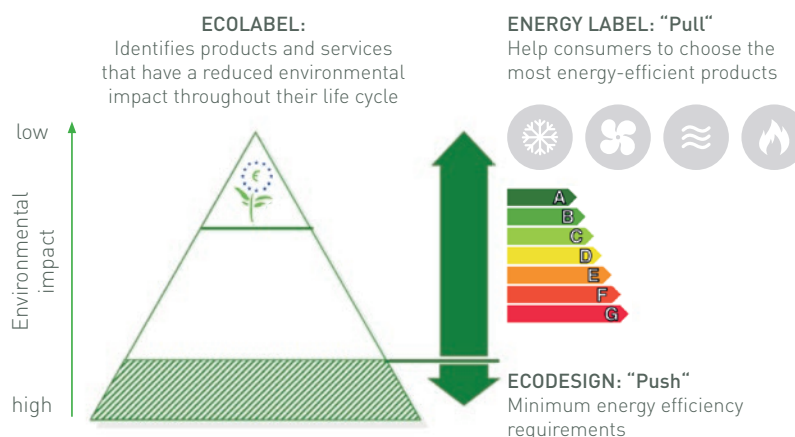

Source: EPEE (<https://www.epeeglobal.org/energy-efficiency/>)

The member states of the EU had required to the same to develop a common path between the different nations of the Union issuing a list of regulations. Each of them takes into consideration a precise class of product, called Lot. YORK Chillers and Heat Pumps are related to three different Lot: ENER 1, ENTR 1 and ENER 21. For every Lot, thru the regulation, have been imposed some limits on efficiencies, consumptions and emissions. Those limits have to become more and more restrictive with the passing of time, in dates established by the regulations. Following the table here reported, we are going to face the final step of the Ecodesign directive in January 2021 with the introduction of the Tier II limits for the Lot 21.

		2015	2016	2017	2018	2019	2020	2021
ECODESIGN EU Framework Directive 2009 / 125 / EC Sets the General Rules	ENER Lot 1 Reg 813/2013 Heat Pumps	T1 Oct15		T2 Oct17				
	ENTR Lot 1 Reg 1095/2015 Process Chillers Brine		T1 Jul16		T2 Jul18			
	ENER Lot 21 Reg 2016/2281 Process Chillers High Temperature and Comfort Chillers				T1 Jan18			T2 Jan21

In this Lot are treated the Process Chillers at High Temperature and Comfort Chillers, in fact the new limitations are related to the cooling only comfort-chillers and the process chillers. The limitations are all related to the efficiency level: for the comfort chiller the reference parameter is $\eta_{s,c}$, for the process chillers the regulation uses the SEPR as key indicator of the efficiency level. For both the indexes the calculation method is reported in the Standard UNI EN 14825-2019 (or the last updated version). This standard high light the possibility of 4 different methods of calculation for the efficiency index. Each method is the result of the combination of the following:

- ➡ **Water Flow: fixed or variable**
- ➡ **Outlet Temperature: fixed or variable**

ENER Lot 1 - Space Heaters (Heat Pumps)

Published regulation 813/2013 affects all Heat Pumps (both air and water cooled) with a rated heating output below 400kW (measured at -10°C ambient).

The heat pumps affected by this regulation are classified as Low Temperature if heating outlet fluid temperature can not be supplied at 52°C (measured at -7°C ambient).

A new KPI

Ecodesign regulation 813/2013 introduces a new Key Performance Indicator (KPI) for seasonal primary energy efficiency ($\eta_{s,h}$), that allows product efficiency comparison with different energy sources.

$$\eta_{s,h}(\%) = 1/CC \times SCOP - \sum F_i$$

SCOP – Seasonal Coefficient of Performance

Ratio between the annual heating demand and the annual electrical input energy over the entire heating season.

SCOP is calculated using standard EN14825, which takes the following into account:

- Seasonal efficiency while the compressor is running (SCOPon)
- Electrical consumption when the compressor is not running: crankcase heater, standby or OFF mode
- Backup heater required to achieve the defined heating design load

CC – Conversion Coefficient

European average coefficient that represents the amount of primary energy required to obtain electricity.

CC is defined by the regulation with a constant value of 2,5.

$\sum F_i$ – Correction Factors

Air source heat pumps


$$\sum F_i = 3\%$$

Water source heat pumps

$$\sum F_i = 8\%$$

A better Indicator

$\eta_{s,h}$ and SCOP are better indicators than full load COP for heating efficiency, as they take into account a representative set of operating hours and real world conditions.

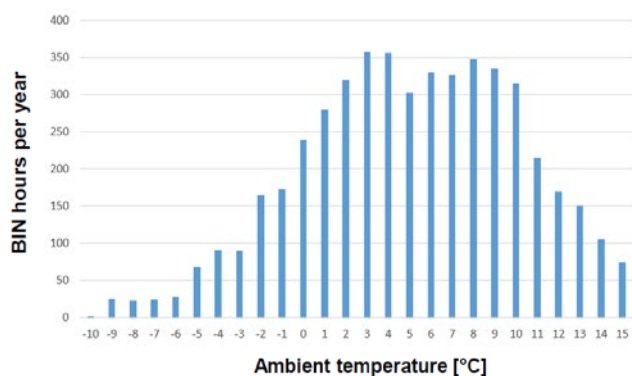

Easy to Compare

$\eta_{s,h}$ is the Seasonal PRIMARY Energy Efficiency value and is used to compare heating products using different energy sources.



Ecodesign Requirements for Space Heaters (Heat Pumps)

	TIER 1 (Oct'15)	TIER 2 (Oct'17)
	$\eta_{s,h}$	$\eta_{s,h}$
Heat Pump	100%	110%
Low Temperature Heat Pump < 400 kW	115%	125%

ENTR Lot 1 – Professional Refrigeration (Process Chillers brine)

Published regulation 1095/2015 affects all Process Chillers operating at design capacity that can generate outlet fluid temperature of -25°C (Low Temperature) or -8°C (Medium Temperature).

High Temperature Process Chillers operating at design capacity that can generate outlet fluid temperature in the range 2–12°C (typically 7°C) are part of ENER Lot 21 (see next page).

A new KPI

Ecodesign regulation 1095/2013 introduces a new indicator called Seasonal Energy Performance Ratio (SEPR), which is the ratio of annual cooling demand to annual electrical energy consumption.


At this time there is no EN specification to base the SEPR calculation on. The calculation is currently based on the "Transitional method for determination of SEPR for industrial process chillers", published with the regulation.

SEPR is calculated from an average climate reference with ambient temperature ranging from -19°C up to 38°C, and with corresponding operating hours at each temperature bin. For Process Cooling, the operating load ranges from 100% down to 80%.

A better Indicator

SEPR is a better performance indicator for process cooling, as it accounts for year round, high load profile operation typical of process cooling applications.

The graph below displays the distribution of temperature bins and hours used by the regulation as a climate reference. This climate reference is based on weather data from cities throughout central Europe.

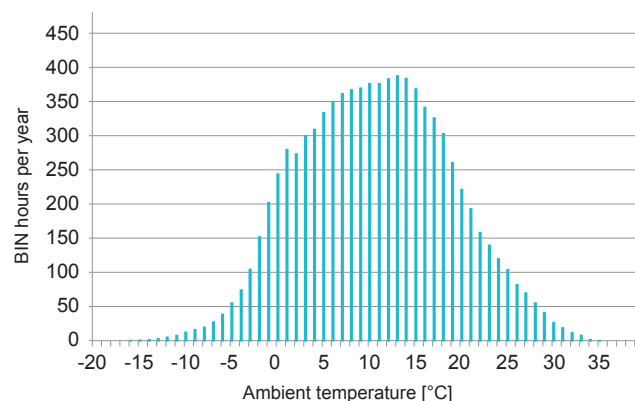

Ecodesign Requirements for Process Chillers Medium Temperature *

WATER TO WATER			
Low Temperature SEPR		Medium Temperature SEPR	
Capacity Range		Capacity Range	
< 200 kW	2.09	< 300 kW	3.29
=> 200 kW	2.42	=> 300 kW	4.37

AIR TO WATER			
Low Temperature SEPR		Medium Temperature SEPR	
Capacity Range		Capacity Range	
< 200 kW	1.7	< 300 kW	2.58
=> 200 kW	1.84	=> 300 kW	3.22

* Assume 10% lower limits for with a low emission refrigerant (GWP<150)

ENER Lot 21 – Central Heating and Cooling products (Comfort Chillers, High Temperature Process Chillers)

Regulation 2016/2281 affects High Temperature Process Chillers and Comfort Cooling Chillers with rated cooling capacity below 2.000 kW. For Comfort Cooling Chillers, compliance is based on either Fan Coil application or Cooling Floor application. The manufacturer's technical datasheet is to specify application(s) in compliance. For process chillers at high temperature the applicable set point range is between 2°C and 12°C.

A new KPI

Ecodesign regulation introduces new Minimum Energy Performance Standards for Comfort Cooling Chillers (SEER), and Process Cooling Chillers (SEPR). In the case of SEPR it will be calculated in a similar way as for process chillers brine (ENTR Lot 1). In the case of ($\eta_{s,c}$), it will be calculated in a similar way to $\eta_{s,h}$ used for comfort heating applications.

$$\eta_{s,c}(\%) = 1/CC \times SEER - \sum F_i$$

SEER – Seasonal Energy Efficiency Ratio

Ratio between the annual cooling demand and the annual electrical input energy over the entire cooling season.

SEER is calculated using standard EN14825, which takes the following into account:

- Seasonal efficiency while the compressor is running (SEERon)
- Electrical consumption when the compressor is not running: crankcase heater, standby or OFF mode

CC – Conversion Coefficient

European average coefficient that represents the amount of primary energy required to obtain electricity.

CC is defined by the regulation with a constant value of 2,5.

$\sum F_i$ – Correction Factors


Air-cooled chillers $\sum F_i = 3\%$

Water-cooled chillers $\sum F_i = 8\%$

A better Indicator

$\eta_{s,c}$ and SEER and SEPR are better performance indicators for cooling, as they take into account temperature bins and hours based on weather data from cities throughout central Europe.

As displayed on the chart below, Process Chillers (SEPR) account for a wider range of temperatures and full year as operating time. Comfort Chillers (SEER) only consider temperatures down to 17°C and about 2600 operating hours.

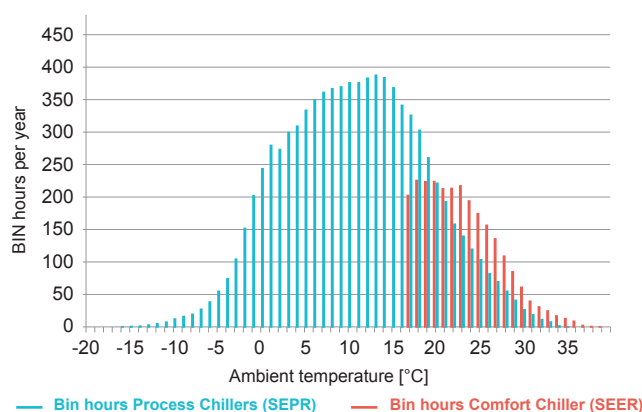

Ecodesign Requirements for Process Chillers High Temperature

		Minimum SEPR value	Minimum SEPR value	Minimum $\eta_{s,c}$ value	Minimum $\eta_{s,c}$ value
Heat transfer medium at the condensing side	Rated refrigeration capacity	TIER 1 (Jan'18)	TIER 2 (Jan'21)	TIER 1 (Jan'18)	TIER 2 (Jan'21)
Air	$P_A < 400$ kW	4.5	5.0	149	161
	400 kW $\leq P_A < 2000$ kW	5.0	5.5	161	179
Water	$P_A < 400$ kW	6.5	7.0	196	200
	400 kW $\leq P_A < 1\,500$ kW	7.5	8.0	227	252
	1500 kW $\leq P_A < 2000$ kW	8.0	8.5	245	272

Product Information

Manufacturers are to provide to installers and end users instruction and access to a website that makes available (for free) a new "Technical Data Sheet" document summarizing the values used for the efficiency ($\eta_{s,c}$, SEPR or $\eta_{s,h}$) calculation.

Below is an example of the "Technical Data Sheet" as it appears in regulation 2016/2281:

Information requirements for comfort chillers							
Model(s): Information to identify the model(s) to which the information relates.							
Outdoor side heat exchanger of chiller: (select which: air or water/brine)							
Indoor side heat exchanger chiller: (default: water)							
Type: compressor driven vapour compression or sorption process							
If applicable: driver of compressor: (electric motor or fuel driven, gaseous or liquid fuel, internal or external combustion engine)							
Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated cooling capacity	$P_{rated,c}$	x,x	kW	Seasonal space cooling energy efficiency	$\eta_{s,c}$	x,x	%
Declared cooling capacity for part load at given outdoor temperature T_j				Declared energy efficiency ratio or gas utilisation efficiency/auxiliary energy factor for part load at given outdoor temperature T_j			
$T_j = +35^\circ\text{C}$	P_{dc}	x,x	kW	$T_j = +35^\circ\text{C}$	EER_d or $GUE_{c,bin}/AEF_{c,bin}$	x,x	%
$T_j = +30^\circ\text{C}$	P_{dc}	x,x	kW	$T_j = +30^\circ\text{C}$	EER_d or $GUE_{c,bin}/AEF_{c,bin}$	x,x	%
$T_j = +25^\circ\text{C}$	P_{dc}	x,x	kW	$T_j = +25^\circ\text{C}$	EER_d or $GUE_{c,bin}/AEF_{c,bin}$	x,x	%
$T_j = +20^\circ\text{C}$	P_{dc}	x,x	kW	$T_j = +20^\circ\text{C}$	EER_d or $GUE_{c,bin}/AEF_{c,bin}$	x,x	%
Degradation coefficient for chillers (*)	C_{dc}	x,x	-				
Power consumption in modes other than "active mode"							
Off mode	P_{OFF}	x,xxx	kW	Crankcase heater mode	P_{ck}	x,xxx	kW
Thermostat off mode	P_{TO}	x,xxx	kW	Standby mode	P_{SB}	x,xxx	kW
Other items							
Capacity control	fixed / staged / variable			For air-to-water comfort chillers: air flow rate, outdoor measured	-	x	m ³ /h
Sound power level, outdoor	L_{WA}	x,x/x,x	dB	For air-to-water comfort chillers: air flow rate, outdoor measured	-	x	m ³ /h
Emissions of nitrogen oxides (if applicable)	NO_x (**)	x	mg/kWh input GCV				
GWP of the refrigerant			kg CO ₂ eq (100 years)				
Standard rating conditions used: (low temperature application/medium temperature application)							
Contact details	Name and address of the manufacturer or of its authorised representative						

(*) If C_{dc} is not determined by measurement then the default degradation coefficient of chillers shall be 0.9.

(**) From 26 September 2018

Compliance

All YORK products on the EU market comply with applicable Ecodesign regulations. In many cases YORK products offer significantly better energy efficiency than required by regulation, resulting in an attractively low cost of operation and lighter environmental footprint.



Air Handling Systems & Terminal Devices

Air Handling Units

Fan Coil Units

Close Control Units

Factory Fitted Controls

So why choose YORK Air Handling Units?

We recognise that your reputation depends on the quality of the products you choose and how well they are installed. That's why we work hard to make selecting, installing and operating our products as easy as possible. Our comprehensive range includes a number of additional options that make YORK Air Handling Units the professional's choice. Additionally, our Air Handling Units comply with requirements of EU Commission Regulation No. 1253/2014 implementing Directive 2009/125/EC of the European Parliament and of the Council with regard to ecodesign requirements for ventilation units.

Factory fitted controls

Save money and time avoiding to mount controls on-site. Johnson Controls offers YORK Air Handling Units complete with Metasys factory fitted controls so it is ready connect to the site network when it arrives.

Our factory fitted controls undergo a detailed testing process at the factory to ensure that all wiring is installed correctly, and that all control panels and end devices work appropriately before the AHU is shipped.



Factory Fitted Controls option

- AHUs Metasys factory fitted controls specified option available.
- Panel Power wiring, Controls wiring and the Variable Speed Drive are included. The pre-engineered controller and required peripheral devices are all supplied factory fitted and tested.
- Guaranteed compliance with European installation regulations.
- Simplified final commissioning through the units' keypad and display.

Energy recovery options

The exhaust air stream from an AHU represents another opportunity to save energy. A **heat recovery 'thermal' wheel** can economically transfer heat and moisture between the exhaust-air and outside-air paths, reducing the cost of conditioning the supply air.

For the simplest form of heat recovery, you can take advantage of **"free" cooling** with mixing box sections. During spring and autumn operation, cool/dry outside air cools and dehumidifies the facility, reducing the need for mechanical cooling.

Alternatively, you can use **recuperative plate heat exchangers**. These also allow free cooling in summer by use of face and bypass dampers which by-pass the air around the exchanger so that it is not warmed by the extracted air.

We can also offer **refrigerant heat pipe** and **heat recovery coils** on your AHU to maximise energy savings. All heat recovery devices installed are compliant with latest ErP regulations.



Heat-recovery wheels reduce the cost of conditioning supply air.

Reduce fan operating costs

In an AHU, the fan is traditionally the largest source of energy consumption. We can help reduce this by offering a range of **energy-saving options**.

- High- or premium-efficiency motors can be specified.
- Direct-drive plenum fans eliminate belt-and-pulley energy losses.
- If the air system is designed for variable-air volume (VAV), YORK AHUs fitted with variable speed drives offer the most efficient method of VAV fan control.
- Factory-mounting a variable speed drive reduce jobsite labour costs, unit energy consumption and unit Life Cycle Costs.

Introducing the YMA range of Air Handling Units



The YORK YMA range encompasses our extensive knowledge of air-handling, offering a highly reliable, economical and energy efficient product capable of addressing all of your needs.

Features

The YMA family of air handling units consists of a range of models having air volumes ranging from 900 – 180.000 m³/h and total static pressures as high as 2000 Pascal: to ensure maximum flexibility and the best solution for your application, units are available in increments of 40mm in height and 50mm in width.

YMA Air Handling Units can be manufactured in varied configurations, with a wide selection of components, to meet customer requirements. Units are also available in line with the requirements of hospital sector specifications.

Dimensional flexibility. Space constraints are a reality on most construction projects. YORK AHU's design is based on variable aspect ratios, so the unit can be specified to fit the application and space.

Material flexibility. Different environments require different materials so we offer a number of construction materials, including galvanized steel, pre-coated steel, stainless steel, and aluminium.

Component flexibility. To meet any AHU requirement, our units offer every available air-handling component. And as applicable technology creates new capabilities, Johnson Controls will apply this to our product range.

Over the past 50 years we have supplied air handling units for:

- **Commercial space:** office buildings, cinemas, concert halls
- **Institutional space:** schools, universities, churches
- **Industrial manufacturing:** automotive, aerospace, chemical, petrochemical
- **Hygienic systems:** hospitals, life sciences, R&D facilities, food processing, clean rooms
- **Process manufacturing:** pharmaceutical, electronics, semiconductor

Equipment Life Cycle. Each YMA unit has a designated suffix ('S', 'T', or 'R') that identifies the factory of origin. This makes it easier to identify and locate production and technical data to assist in advising on spare parts, as well as supporting the customer with any post installation modifications or upgrades that may be requested during the life of the unit.

YMA

Custom Air Handling Units

A complete range from 900 m³/h – 180.000 m³/h



Features


The YMA family of air handling units consists of a range of models having air volumes ranging from 900 - 180.000 m³/h and total static pressures as high as 2000 Pascal: to ensure maximum flexibility and the best solution for your application, units are available in increments of 40mm in height and 50mm in width.

YMA Air Handling Units can be manufactured in varied configurations, with a wide selection of components, to meet customer requirements.

Units are also available in line with the requirements of hospital sector specifications.


Units may include combinations of any of the following:

- Single or double decked units.
- Indoor or outdoor applications - Outdoor units are available with a flat or sloping roof, louvres, rainhoods, birdscreens and special finishes.
- Site assembled units.
Where space constraints restrict the size of a single item modules can easily be aligned and locked together by gaskets and stainless steel bolts inserted into factory predrilled assembly holes.
- Air mixing boxes and various filter options.
- Gas fired burners.
- Cooling and heating coils.
- Humidifiers
- Heat recovery systems.
- UV sterilising lamps.
- Dessicant and thermal wheels.
- Sound attenuation.
- ATEX Certification.
- Factory fitted controls and sensors
These include all necessary piping, wiring, controls and refrigeration equipment to provide a complete central air conditioning plant.
- Hygienic construction option for hygiene sensitive environments.

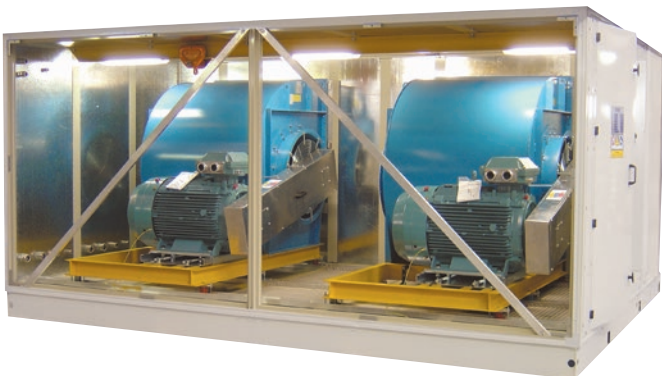


The Frame

- Low weight, corrosion resistant, marine aluminium alloy twin box section profile, designed to provide strength and stability
- Gaskets between the frameworks' panels and profiles, to allow efficient cleaning and prevent trapping and harmful bacteria growth
- Optional thermal bridge free profile
- Unit sections mounted on a 3mm thick galvanized steel bolted base frame

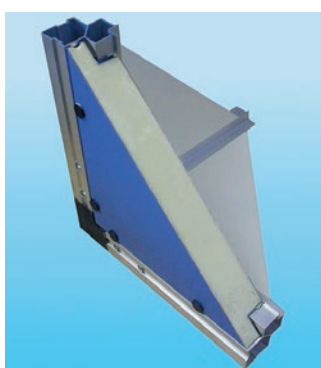

Standard Construction

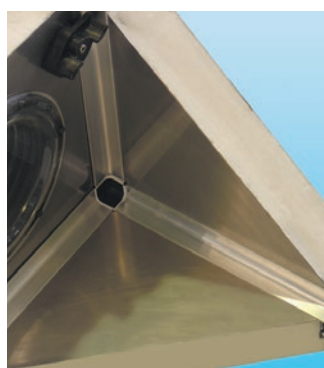

Cold Bridge Free Construction



Panels

- Standard 60mm thick (40mm optional) double skinned galvanized panels
- 0.7mm internal and external skins with 40kg/m³ density pressure injected polymerised polyurethane foam insulation
- Returned "K" value of 0.2W/m C
- Optional panels manufacturing from pre-plastic coated steel, pre-painted metal or stainless steel
- Mineral wool infill panel of 100kg/m³ density available
- 88mm panels available upon request

Access

- Fully removable panels
- Access doors equipped with half turn nylon handles and cam locks
- Fibreglass reinforced plastic hinges with stainless steel pivots
- Double glazed viewing portholes (optional)

Mechanical characteristics- prEN 1886:2007*

*EUROVENT DIPLOMA 08.05.289 YMA (T), 09.11.443 YMA (R), 05.02.314 YMA (S) APPLIES

MODEL	CASING STRENGTH CLASS	CASING AIR LEAKAGE CLASS AT 400 Pa	CASING AIR LEAKAGE CLASS AT 700 Pa	THERMAL LEAKAGE CLASS	FILTER BYPASS TRANSMITTANCE CLASS	THERMAL BRIDGING FACTOR CLASS
PU6055ST	D1(M)	L1(M)	L1(M)	F9(M)	T2	TB3
PU6040TB	D1(M)	L1(M)	L1(M)	F9(M)	T1	TB2
RW6055ST	D2(M)	L2(M)	L2(M)	F9(M)	T2	TB3
RW6055TB	D1(M)	L1(M)	L2(M)	F9(M)	T2	TB2
PU6055TB	D1(M)	L1(M)	L1(M)	F9(M)	T1	TB2



Manufacturer reserves the rights to change specifications without prior notice.

YMB / YPS Modular Air Handling Units

A complete range from 300 m³/h – 100.000 m³/h

Building and indoor climate requirements are constantly evolving. They can be influenced by many factors: energy legislation, occupancy churn, lighting, IT infrastructures... all important reasons that highlight the need for reliable, efficient Air Handling units.

Suitable for use in either new building developments or upgrades and refitting of existing buildings, our **YMB** range of AHU is a range of modular, Fixed Aspect Ratio units designed with efficiency and cost in mind to meet the needs of more 'commercial' installations.

Our knowledge, flexibility and commitment to the customer address four primary requirements of building owners and designers—efficiency, flexibility, sustainability, and confidence.



Our YMB and YPS range are DIN1946-4 certified



YMB / YPS Modular Air Handling Unit characteristics

Available sizes	21	
Airflow range (m ³ /h)	700 ~ 100 000	
Application	<ul style="list-style-type: none"> • housing and retail construction industry • public utility buildings • industrial facilities construction • leisure facilities 	
Basic options	<ul style="list-style-type: none"> • G4 class filters • F5, F7, F9 class filters • heat recovery • water / steam / glycol / electric heater • water / glycol / freon cooler • humidification, fan and attenuation section 	
Additional options	<ul style="list-style-type: none"> • sub-assemblies manufactured as explosion-proof • swimming pool version • hygienic version • YORK Factory Fitted Controls 	
Heat recovery	<ul style="list-style-type: none"> • recirculation • cross-flow heat exchanger • rotary heat exchanger 	<ul style="list-style-type: none"> • heat pipe • glycol recovery system • heat pump
Installation type	• indoors (YMB) / outdoors (YMBD)	



YMB is available for indoor installation called YMB and outdoor installation called YMBD



Manufacturer reserves the rights to change specifications without prior notice.

YPS Modular Air Handling Unit characteristics


Available sizes	5
Airflow range (m³/h)	300 – 5 400
Application	<ul style="list-style-type: none"> • in suspended ceilings and wherever building construction limitations do not allow other systems to be implemented, e.g. in industrial workshops, warehouses, wholesale establishments, workshops, offices, etc
Basic options	<ul style="list-style-type: none"> • G4 class filters • F5, F7, F9 class filters • heat recovery • water / steam / glycol / electric heater • water / glycol / freon cooler • humidification, fan and attenuation section
Additional options	<ul style="list-style-type: none"> • sub-assemblies manufactured as explosion-proof • automation module • automation module designed to cooperate with intelligent BMS system • YORK Factory Fitted Controls
Heat recovery	<ul style="list-style-type: none"> • cross-flow heat exchanger • recirculation
Installation type	<ul style="list-style-type: none"> • indoors



YMBS/YMBD and YPS performances

YMBS/YMBD*				
Unit size	Airflow range [m³/h]	Width B	Height H1	Height H2
Insulation 50 mm				
MINI	700 – 1 800	640	490	980
1	1 000 – 3 000	650	600	1 200
2	2 600 – 4 100	700	700	1 440
3	3 900 – 6 100	940	700	1 440
4	6 000 – 9 400	940	1 010	2 020
1	1 000 – 3 000	690	640	1 280
2	2 600 – 4 100	740	740	1 480
3	3 900 – 6 100	980	740	1 480
3-BIS	5 000 – 8 000	1 290	740	1 480
4	6 000 – 9 400	980	1 050	2 100
5	8 000 – 12 600	1 290	1 050	2 100
6	9 600 – 15 100	1 290	1 250	2 500
5-BIS	11 000 – 17 000	1 580	1 050	2 100
6-BIS	13 200 – 21 000	1 580	1 250	2 500
7	13 500 – 21 300	1 580	1 370	2 740
7-BIS	18 000 – 28 000	1 885	1 370	2 740
8	21 300 – 33 700	1 885	1 670	3 340
9	26 000 – 41 000	1 885	2 020	4 040
8-BIS	30 000 – 46 000	2 400	1 670	3 340
10	34 000 – 53 000	2 400	2 020	4 040
8A-BIS	38 000 – 59 000	3 000	1 670	3 340
11	43 000 – 69 000	2 400	2 500	5 000
10-BIS	46 000 – 71 500	3 000	2 020	4 040
12	57 000 – 90 000	3 000	2 500	5 000
12-BIS	68 000 – 100 000	4 800	2 020	-

YPS			
Unit size	Airflow range [m³/h]	Width B	Height H
Insulation 50 mm			
MINI	300 – 1 100	500	435
1	900 – 2 500	780	435
2	1 400 – 3 900	1 090	435
3	1 200 – 3 350	780	535
4	2 000 – 5 400	1 090	535

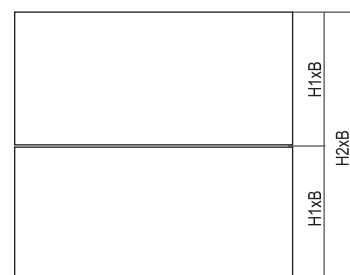

YMBS/YMBD



YPS

* YMBD is only in 50 mm thick insulation available (optionally, YMBS and YMBD in 70 mm thick insulation)

YBV

Plug and Play Air Handling Units

A complete range from 400 m³/h to 5000 m³/h

Introducing the new YBV series of self contained Air Handling Units from YORK.

YBV units are a range of compact Air Handling units offering true Plug and Play capability using our Verasys BMS system – Their ready-to-use control functions are provided for accessories such as cooling units and heating coils and wiring is done by means of cables with quick connectors. Additionally, energy-saving fans and efficient heat recovery devices offer full control of temperatures, airflows and operating times to give you optimal operational economy.

For ease of maintenance, inspection doors are large for easy component access and all major components are side removable.

YBV series units can be selected and ordered quickly and easily, and have a short lead time – offering you a space saving, time saving, cost saving, energy saving solution!

The **YBV** range comprises the following models:

- **YBVS series:** with counter flow or cross flow heat exchanger
- **YBVR series:** as per YBVS series but with rotary wheel heat exchanger
- **YBVD series:** compact, low capacity range with counter flow or cross flow heat exchanger

YBVS Air Handling Unit characteristics

Available sizes	4
Airflow range (m ³ /h)	400 ~ 3 800
Application	<ul style="list-style-type: none"> • offices • Kindergardens • shopping centers • public utility buildings, etc
Basic options	<ul style="list-style-type: none"> • G4 class filter • heat recovery • water / electric heater • 2 axial-flow centrifugal fans • by-pass • SMART EQUIPMENT automation module
Additional options	<ul style="list-style-type: none"> • EC fans • automation module designed to cooperate with any BMS system
Heat recovery	<ul style="list-style-type: none"> • counter-flow heat exchanger (in size 1) • cross-flow heat exchanger (in sizes 2, 3, 4)
Installation type	<ul style="list-style-type: none"> • indoors
Other features	<ul style="list-style-type: none"> • self-supporting housing structure • plug&play installation type • ducts connected from the top • low noise level



System advantages

- Easy and simple installation (plug&play)
- Reduced cost of operation due to high-efficiency heat exchanger (91% recovery - YBVS-1)
- Low noise level
- A by-pass integrated with the cross-flow heat exchanger allows for operation without heat recovery
- Self-supporting housing structure - without aluminium profiles
- Attractive and minimalistic style
- Ensured supply of a suitable volume of fresh and additionally cleaned air
- Ensured high quality air and good effect on the health of people staying rooms
- Automatic components supplied with Johnson Controls Factory Fitted Controls


The **YBVS 2, 3, 4** unit has two axial-centrifugal fans. Supply fan removes contaminated warm air from the room and the exhaust fan, transports cold feed air.

Both streams are decontaminated on filters and pass through the cross-flow heat exchanger, where heat is exchanged between the streams. Additionally, fresh air, after passing through the cross-flow exchanger, is heated by an electrical or water heater to the required temperature of the supplied air.




The unit has an integrated by-pass.

Functions:

- Night cooling of rooms during summer by bypassing the cross-flow heat exchanger, when the outdoor temperature is lower than the indoor temperature.
- Defrosting of the heat exchanger

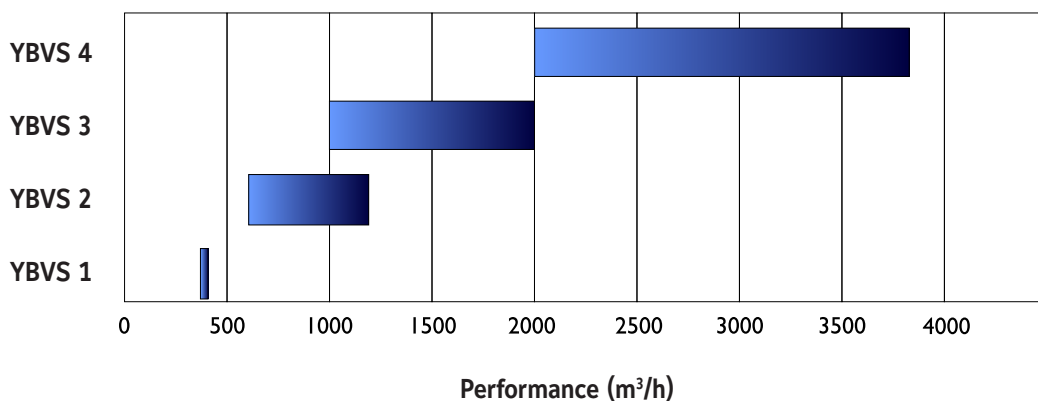

Unit size	Weight [kg]	Dimensions [mm]				Airflow range [m³/h]		Max heat recovery [%]
		Width B	Height H	Length L	Flexible connections, dampers B x H	min	max	
1	85	550	600	1 100	fi 160	400	400	91
2	180	750	850	1 300	400 x 200	600	1 200	72
3	240	800	1 000	1 600	500 x 315	1 000	2 000	78
4	380	880	1 300	2 200	630 x 400	2 000	3 800	70

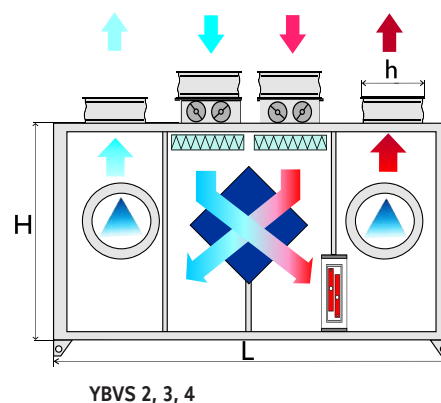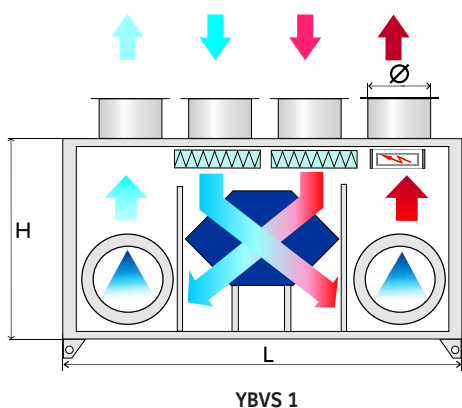

YBVR Air Handling Unit characteristics

Available sizes	4	
Airflow range (m³/h)	500 ~ 5 000	
Application	<ul style="list-style-type: none"> • offices, houses, shops • Kindergardens • public utility buildings, etc 	
Basic options	<ul style="list-style-type: none"> • G4, M5, F7 class filters • heat recovery – rotary heat exchanger • water / electric heater • 2 EC fans modules • SMART EQUIPMENT automation module 	
Additional options	<ul style="list-style-type: none"> • cooling section • automation module designed to cooperate with a larger BMS system 	
Heat recovery	• rotary heat exchanger	
Installation type	• indoors	
Other features	<ul style="list-style-type: none"> • self-supporting housing structure • plug&play installation type 	<ul style="list-style-type: none"> • ducts connected from the top • low noise level





System advantages

- Easy and simple installation (plug&play)
- Reduced cost of operation due to high-efficiency heat exchanger with 90% recovery
- Low noise level
- Attractive and minimalistic style
- Ensured supply of a suitable volume of fresh and additionally cleaned air
- Ensured high quality air and good effect on the health of people staying rooms
- Automatic components supplied with Johnson Controls Factory Fitted Controls

The **YBVR** unit has fans with EC motors. Supply fan removes contaminated warm air from the room and the exhaust fan, transports cold feed air.

Both streams are decontaminated on filters and pass through the rotary wheel heat exchanger, where heat is exchanged between the streams. Additionally, fresh air, after passing through the rotary wheel exchanger, is heated by an electrical or water heater to the required temperature of the supplied air.

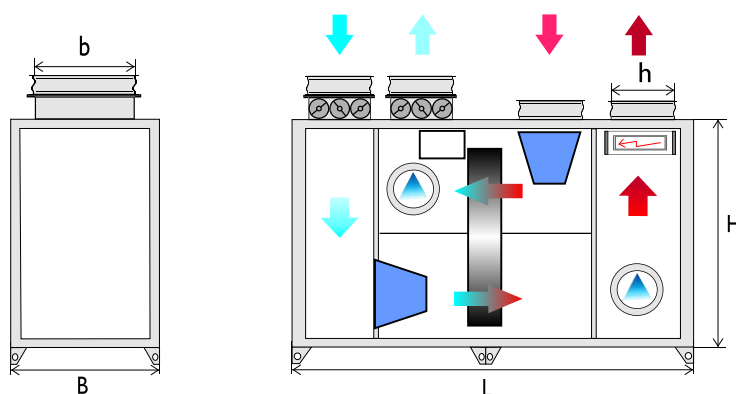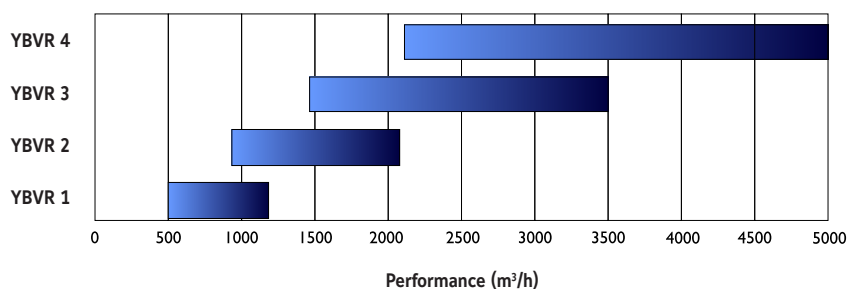

Unit size	Weight [kg]	Dimensions [mm]				Airflow range [m³/h]	
		Width B	Height H	Length L	Flexible connections, dampers B x H	min	max
1	180	750	900	1 400	300 x 200	500	1 200
2	270	900	1 100	1 700	400 x 200	900	2 100
3	360	1 100	1 250	1 800	600 x 300	1 450	3 500
4	440	1 200	1 400	2 050	800 x 400	2 100	5 000




Manufacturer reserves the rights to change specifications without prior notice.

YBVD Air Handling Unit characteristics

Available sizes	4
Airflow range (m³/h)	500 – 4 500
Application	<ul style="list-style-type: none"> • offices • Kindergardens • shopping centers • public utility buildings, etc
Basic options	<ul style="list-style-type: none"> • G4 class filter • heat recovery – counter-flow heat exchanger • 2 EC fans modules • SMART EQUIPMENT automation module
Additional options	<ul style="list-style-type: none"> • cooling section • automation module designed to cooperate with a larger BMS system
Heat recovery	<ul style="list-style-type: none"> • counter-flow heat exchanger
Installation type	<ul style="list-style-type: none"> • indoors
Other features	<ul style="list-style-type: none"> • self-supporting housing structure • plug&play installation type • low noise level



Unit size	Weight [kg]	Dimensions [mm]				Airflow range [m³/h]	
		Width B	Height H	Length L	Flexible connections, dampers B x H	min	max
1	240	750	1 250	1 600	300 x 200	500	1 200
2	360	900	1 550	1 950	400 x 300	900	2 100
3	460	1 100	1 650	2 100	600 x 300	1 450	3 500
4	540	1 200	1 650	2 400	800 x 400	2 100	4 500

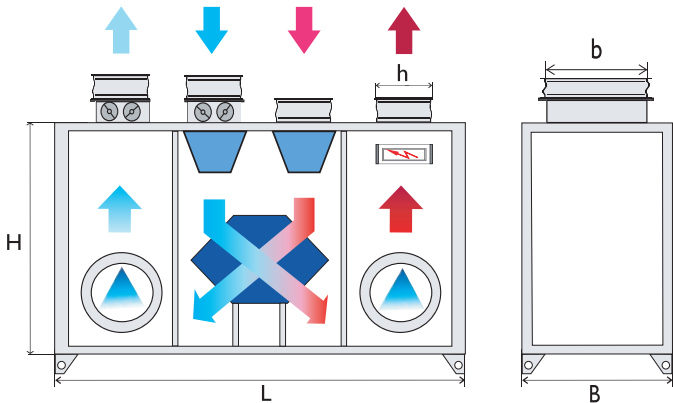

YORK Fan Coil units

Driven by innovative trends and modern technology, the YORK Fan Coil Units have been designed around a platform of models, versions and accessories, which have been independently tested and certified by Eurovent. The YORK Fan Coil range meets today's demanding requirements of performance, size, acoustics, low energy, ease of installation and maintenance.



An extensive offering

- One of the **most versatile** ranges of fan coils on the market today. Wall and ceiling mounted units, exposed or concealed with centrifugal fan, are included, and with cooling capacities ranging from 0.6 kW to 9.7 kW.
- Dramatic **electrical consumption reduction** of up to 40% comparative to previous models. This is achieved thanks to the supply of all YORK Fan Coil Units equipped with centrifugal fans and electric motors, and with 6 speed motors as standard to offer greater flexibility in the selection of products.
- **Energy saving brushless motor** technology option available. Its combination with a dedicated frequency inverter and unit controller to regulate the fan speed enables higher efficiencies, even at low rotational speeds, lower unit noise, constant speed characteristics and an increase in motor lifetime expectancy. In comparison to the traditional units equipped with asynchronous three-speed-motors, units with brushless motors can obtain a considerable energy saving, by reducing the power consumption by up to 70%.
- A full range of **factory fitted Johnson Controls valve and pre-configured control options** is offered. This in addition to a patented 'wireless' control option - offering greater flexibility in the installation of units, with the highest precision in monitoring and maintaining the desired comfort conditions.
- Many of our ranges are available configured for use with 60Hz voltage, and specially designed cooling coils for **District Cooling applications**.
- **High pressure 'Blower' units** are also available. They can offer up to 29.4 kW of cooling at External Static Pressures of up to 250Pa, and are complemented with a full range of options and accessories covering items such as electrical heating battery, air inlet/outlet diffusers and condensate pumps.



Iconography



Infrared or
Wired control



Wired
control



Dry mode



Timer



Auto
Restart



Sleep
mode



Auto
Sweep



Ducted
Installation



4 Way
Air Flow



Air Filter

YFCN Fan Coil Unit with centrifugal fan

2 & 4 pipe system

A complete range from 0.7 kW to 7.4 kW



YFCN is a range of Fan Coil Units that continues the YORK tradition based on high reliability and low noise levels. It is the result of great commitment in terms of energy and resources to offer a more modern product from every angle, while still delivering the convenience of easy access to the filters in all models.

Moreover each version has the same internal structure, identical in both horizontal and vertical models, in order to standardise production and guarantee a greater flexibility in distribution and installation.



Selection software

Wired controls



WM-3V
Remote three speeds controller

JWC-T
WC-3V + Electronic thermostat and Summer/Winter switch

JWC-AU
Automatic JWC-T



T-MB
Digital Automatic Remote controller

WM-503-AC-EC
Digital Automatic Remote controller to be mounted in the standard light wall box



Infrared control



TUC03+ Terminal unit controller
BacNET and N2 Metasys network compatible




Features

- New casing, improved aesthetics, suitable for any modern indoor ambient
- Full range for all needs: 9 sizes suitable for horizontal or vertical mounting with or without casing
- Low noise operation
- 3 fan speeds (possible choice between 6 fan speeds)
- Single piece discharge grid
- Several coil choices. Single: 3 or 4 rows; Dual: 3 rows cooling & 2 rows heating
- Electrical heater optional
- Suction and discharge plenum optional
- Factory fitted valve (on/off or modulating) and controller packages
- Painted back panel option
- 4 available versions in all range:
 - VC = Vertical Discharge with Casing
 - VCB = Vertical Discharge with Casing (floor installation)
 - HC = Horizontal Discharge with Casing
 - CD = Concealed unit without Casing
- EUROVENT Certified

YFCN Fan Coil Unit with centrifugal fan

0.7 kW to 7.4 kW



Technical features

Model			140	240	340	440	540	640	740	840	940	
Total cooling capacity [kW]	(1)	max	1.20	1.78	2.53	3.08	4.03	4.71	5.48	6.34	7.42	
		med	1.00	1.41	1.87	2.25	3.21	3.81	4.56	5.63	6.41	
		min	0.65	1.00	1.63	1.81	2.17	2.79	3.51	3.97	4.79	
Sensible cooling capacity [kW]	(1)	max	0.94	1.35	1.86	2.30	3.01	3.52	4.13	4.93	5.87	
		med	0.77	1.05	1.36	1.65	2.36	2.81	3.39	4.33	4.98	
		min	0.49	0.73	1.18	1.32	1.58	2.03	2.57	2.98	3.63	
Water flow in cooling [l/h]	(1)	max	212	311	442	537	703	824	960	1 113	1 307	
		med	175	246	325	392	559	664	798	986	1 125	
		min	115	174	284	315	377	487	612	693	839	
Pressure drop in cooling [kPa]	(1)	max	5.6	13.9	11.5	15.5	31.3	36.2	27.7	32.2	23.2	
		med	4	9.1	6.7	9	20.8	24.8	20	26.0	17.8	
		min	1.9	4.9	5.3	6.1	10.4	14.4	12.5	14.0	10.6	
Heating capacity 2 pipes [kW]	(2)	max	1.31	1.83	2.59	3.14	4.01	4.92	5.59	7.20	8.52	
		med	1.07	1.43	1.87	2.27	3.16	3.90	4.62	6.27	7.18	
		min	0.69	0.99	1.62	1.80	2.10	2.82	3.49	4.26	5.23	
Water flow in heating 2 pipes [l/h] *	(2)	max	212	311	442	537	703	824	960	1 113	1 307	
		med	175	246	325	392	559	664	798	986	1 125	
		min	115	174	284	315	377	487	612	693	839	
Pressure drop in heating 2 pipes [kPa]	(2)	max	5.3	11.8	9.8	12.8	25.2	31.8	23.2	31.7	23.7	
		med	3.7	7.6	5.4	7.2	16.6	21.1	16.6	24.9	17.6	
		min	1.7	4.0	4.2	5.0	8.1	11.9	10.1	12.8	10.0	
Heating capacity 4 pipes [kW]	(3)	max	0.91	1.33	1.99	2.33	3.00	3.33	4.20	4.75	5.46	
		med	0.77	1.09	1.56	1.81	2.50	2.79	3.59	4.26	4.79	
		min	0.55	0.83	1.40	1.52	1.84	2.19	2.89	3.16	3.71	
Water flow in heating 4 pipes [l/h] *	(3)	max	78	114	171	200	258	287	361	408	470	
		med	66	94	134	156	215	240	309	366	412	
		min	47	71	120	131	158	188	249	272	319	
Pressure drop in heating 4 pipes [kPa]	(3)	max	1.3	3.1	7.8	10.3	3.2	3.8	6.7	8.3	10.7	
		med	1.0	2.2	5.1	6.6	2.3	2.8	5.1	6.9	8.5	
		min	0.5	1.3	4.2	4.9	1.3	1.8	3.5	4.1	5.4	
Air flow [m3/h]		max	220	295	385	485	650	760	925	1 200	1 500	
		med	175	220	270	335	495	590	735	1 020	1 210	
		min	105	145	235	265	315	415	535	655	830	
Sound power level [dB(A)]		max	45	47	49	47	48	52	56	60	64	
		med	39	40	40	39	41	46	51	56	58	
		min	32	30	36	33	31	37	42	45	50	
Sound pressure level [dB(A)]	(4)	max	36	38	40	38	39	43	47	51	55	
		med	30	31	31	30	32	37	42	47	49	
		min	23	21	27	24	22	28	33	36	41	
Power supply [V-ph-Hz]			230 / 1 / 50 + E									
Power input [W]			max	33	40	49	57	61	88	103	130	176
Absorbed current [A]			max	0.16	0.18	0.23	0.26	0.27	0.39	0.47	0.58	0.78
Dimensions **	Height	mm	530	530	530	530	530	530	530	530	530	
	Width	mm	670	770	985	985	1 200	1 200	1 415	1 415	1 415	
	Depth	mm	225	225	225	225	225	225	225	255	255	

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C.

(2) Room temperature 20°C - Water temperature 45/40 °C. (3) Room temperature 20°C - Water temperature 65/55 °C.

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

* Water flow values as Cooling, accordingly to the EUROVENT standards and UNI ENV 1397.

** Dimensions refer to the units with casing.

Data shown is for 4 row cooling version, 2 pipe system.

For performance of 3 row cooling version please contact your local Johnson Controls sales office.



Manufacturer reserves the rights to change specifications without prior notice.

ECM Technology



Running costs. Energy consumption. Life cycle.

These are 3 issues that are becoming more and more important in the choice of Fan Coil Units. With these criteria in mind, Johnson Controls offers the ECM range of FCU.

ECM technology comprises a **brushless motor** combined to a **dedicated electronic device** (inverter). In comparison to conventional units equipped with asynchronous three-speed motors, the fancoil and cassette units with brushless motors can obtain a considerable energy saving, by **reducing power consumption up to 70%**.

Air flow rate can be varied in continuous by means of a 1-10 V signal generated both by our controls or by independent controls systems. The continuous air flow control improves the **acoustic comfort** and allows a more punctual reply to the variation of the thermal loads, enhancing the **stability of ambient temperature**.


Technology

ECM technology consists of a brushless motor combined with an inverter managed by specific regulators. The controller uses a 0-10 VDC modulating signal to regulate the fan speed.

The brushless electric motor is composed of a rotor having permanent magnets, whose magnetic fields interact with the ones produced by the stator winding. The **transfer of current is no longer by mechanical commutator** (sliding contacts) **but by an electronic commutation system**: one electronic controller (inverter) powers the motor's stator and generates rotating magnetic fields, that in turn determine the rotor's speed.

Brushless motor develop much less heat than the traditional brushed motors and they have much lower mechanical resistance than the standard asynchronous maintenance. The absence of brushes eliminates also the main source of electromagnetic noise.

Power consumption: YFCN versus YFCN-ECM (W/kW)

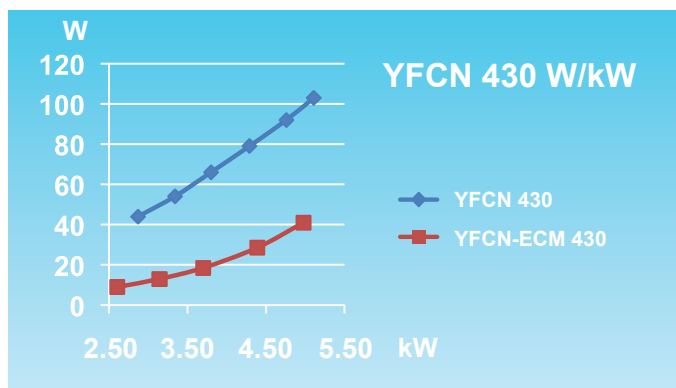


Features

- Brushless motor with inverter.
- 0-10VDC control signal.
- Low mechanical resistance and heat gain
- Continuous regulation of the fan speed.
- Specifically designed electronic and digital regulators, also for BMS systems.
- Possibility to manually set the desired three fan speeds (MIN/MED/MAX).
- Available for fan coil and cassette units.


Advantages (compared to traditional brushed motors)

- Energy saving: electrical absorption reduced up to 70%.
- Higher efficiency: possibility to adapt the air volume and the capacities according to the actual room loads.
- Higher comfort: reduced variation of the temperature and relative humidity in the room.
- Extremely quiet operation.
- Reduced wear and higher reliability.
- Longer life expectancy of the motor.

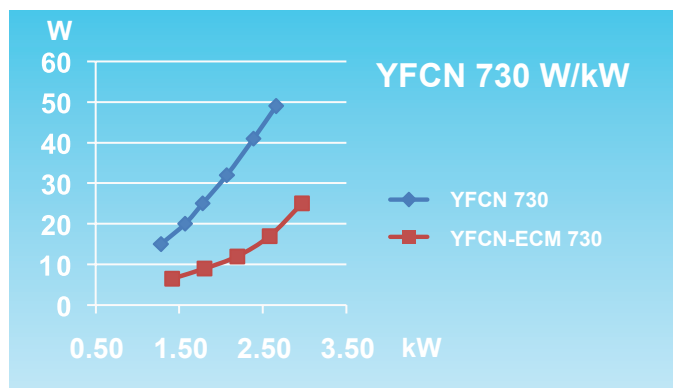

YFCN-ECM Inverter Fan Coil Unit with centrifugal fan

0.7 kW to 7.1 kW

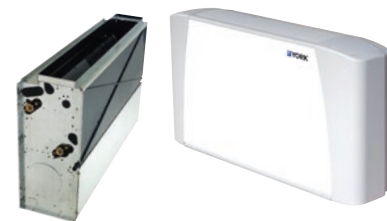

Technical features

Model		230	240	430	440	630	640	730	740	930	940
Total cooling capacity [kW]	max 10v	1.59	1.86	2.95	3.17	3.96	4.51	4.94	5.30	6.26	7.04
	(1) med 5v	1.18	1.32	2.18	2.27	2.93	3.19	3.68	3.82	4.82	5.21
	min 1v	0.73	0.77	1.41	1.43	1.96	2.05	2.60	2.61	3.45	3.59
Sensible cooling capacity [kW]	max	1.28	1.42	2.26	2.39	3.08	3.38	3.80	3.99	5.10	5.53
	(1) med	0.92	0.98	1.64	1.67	2.22	2.34	2.77	2.82	3.79	3.99
	min	0.55	0.56	1.03	1.03	1.46	1.48	1.92	1.90	2.63	2.69
Water flow in cooling [l/h]	max	277	323	511	549	686	781	857	918	1 094	1 228
	(1) med	205	229	377	392	506	550	636	660	836	903
	min	127	134	244	248	339	354	449	451	597	621
Pressure drop in cooling [kPa]	max	8.6	14.8	28.9	16.1	19	33	32.6	25.6	25.9	20.8
	(1) med	5.1	8	17	8.9	11.1	17.8	19.4	14.3	16.1	12.1
	min	2.2	3.2	7.9	4	5.5	8.2	10.5	7.3	8.9	6.3
Heating capacity 2 pipes [kW]	max	1.80	1.98	3.14	3.32	4.14	4.68	5.08	5.43	7.38	7.93
	(2) med	1.29	1.37	2.26	2.30	3.00	3.23	3.72	3.84	5.41	5.63
	min	0.77	0.78	1.42	1.42	1.96	2.02	2.56	2.57	3.74	3.76
Water flow in heating 2 pipes [l/h] *	max	277	323	511	549	686	781	857	918	1 094	1 228
	(2) med	205	229	377	392	506	550	636	660	836	903
	min	127	134	244	248	339	354	449	451	597	621
Pressure drop in heating 2 pipes [kPa]	max	7.0	13.6	26.7	13.7	17.0	29.1	28.3	22.0	24.2	20.9
	(2) med	3.9	7.1	14.9	7.3	9.6	15.1	16.4	12.0	14.0	11.4
	min	1.6	2.6	6.6	3.1	4.5	6.6	8.5	5.9	7.3	5.6
Heating capacity 4 pipes [kW]	max	1.43	-	2.41	-	3.22	-	4.06	-	5.24	-
	(3) med	1.08	-	1.85	-	2.45	-	3.12	-	4.05	-
	min	0.71	-	1.29	-	1.76	-	2.33	-	2.99	-
Water flow in heating 4 pipes [l/h]	max	140	-	236	-	317	-	398	-	514	-
	(3) med	106	-	181	-	241	-	306	-	397	-
	min	70	-	126	-	172	-	228	-	292	-
Pressure drop in heating 4 pipes [kPa]	max	3.5	-	11.0	-	3.6	-	6.3	-	9.9	-
	(3) med	2.1	-	6.9	-	2.2	-	4.0	-	6.3	-
	min	1.0	-	3.6	-	1.2	-	2.4	-	3.7	-
Air flow [m ³ /h]	max	330	325	515	505	735	720	890	875	1 395	1 365
	med	220	210	350	340	495	475	610	585	945	910
	min	120	115	210	200	305	290	400	380	605	575
Sound power level [dB(A)]	max	51	51	51	51	54	54	57	57	64	64
	med	41	41	42	42	44	44	48	48	55	55
	min	30	30	30	30	33	33	37	37	44	44
Sound pressure level [dB(A)]	max	42	42	42	42	45	45	48	48	55	55
	(4) med	32	32	33	33	35	35	39	39	46	46
	min	21	21	21	21	24	24	28	28	35	35
Power supply [V-ph-Hz]		230 / 1 / 50 + E									
Power input [W]		max	21	21	25	25	32	32	41	41	99
Absorbed current [A]		max	0.18	0.18	0.22	0.22	0.28	0.28	0.34	0.34	0.81
Dimensions **	Height mm	530	530	530	530	530	530	530	530	530	530
	Width mm	770	770	985	985	1 200	1 200	1 415	1 415	1 415	1 415
	Depth mm	225	225	225	225	225	225	225	225	255	255

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water temperature 45/40 °C

(3) Room temperature 20°C - Water temperature: 65/55°C

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

* Water flow values as Cooling, accordingly to the EUROVENT standards and UNI ENV 1397 ** Dimensions refer to the units with casing



Manufacturer reserves the rights to change specifications without prior notice.

Options / Accessories

Compatibility table / Codes

Model	YFCN AC motor + Standard control devices		
Versions	VC/VCB mod. - Vertical with casing	HC mod. - Horizontal with casing	CD mod. - Without casing
Controls for style VC (supplied with separate packaging)			
Three speed control BL (1)	9060130	-	-
Three speed control + electronic thermostat and S/W switch TMV-S (2)	9060140	-	-
Three speed control + electronic thermostat and centralized S/W - TLC (2)	9060133	-	-
Automatic speed control with electronic thermostat and S/W switch ATL (2)	9066319	-	-
Controls for style HC/CD (supplied with separate packaging)			
Remote three speed control WM-3V (1) (4)	-	9066642	9066642
Remote three speed control + electronic thermostat JWC-T and manual S/W switch (2)	-	9066630K	9066630K
Remote three speed control + electronic thermostat and centralized/manual S/W switch JWC-TQR (2) (3)	-	9066631K	9066631K
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)	-	9066632K	9066632K
Automatic remote control with electronic thermostat, S/W switch and liquid crystal display T-MB (to be used with UPM-AU and UP-AU only) (2) (3)	-	9066331E	9066331E
Automatic speed control with electronic thermostat to be mounted in the light wall box WM-503-AC-EC (to be used with UP-503-AC-EC only)	-	9066686E	9066686E
Electromechanical thermostat T2T (4) (5)	-	9060174	9060174
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit	9066641	9066641	9066641
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit	9066640	9066640	9066640
Power unit UP-503-AC-EC for WM-503-AC-EC remote control only, not fitted on the unit	9066677	9066687	9066687
Controls accessories for all versions (supplied with separate packaging)			
Low temperature cut-out for controls TLC	3021091	3021091	3021091
Low temperature cut-out for controls TMV-S, WC-3V and JWC-T	9053048	9053048	9053048
Low temperature cut-out for controls ATL, ATL-E, JWC-TQR, WM-503-AC-EC and UP-AU power unit	3021090	3021090	9053049
T2 sensor to be used as Change-over for controls ATL, ATL-E and UP-AU power unit	9025310	9025310	9025310
Change-over 15-25 for control TLC and JWC-TQR	9053049	9053049	9053049
Receiving speed selector for centralized control (slave) style VC RECV	9060136	9060136	9060136
Receiving speed selector for centralized control (slave) style HC/CD SEL-CR	9066311	9066311	9066311
Terminal board adaptor kit KIT	9060103	-	-
Controls for style VC + additional electric resistance (supplied with separate packaging)			
Three speed control with electronic thermostat and S/W switch TMV-R-IAQ	9063006	-	-
Automatic speed control with electronic thermostat and S/W switch ATL-E (2) (3)	9066643	-	-
Controls for style HC/CD + additional electric resistance (supplied with separate packaging)			
Remote three speed control + electronic thermostat and centralized/manual S/W switch JWC-TQR (2) (3)	-	9066631K	9066631K
Automatic speed control with electronic thermostat and centralized S/W - JWC-AU (2) (3)	-	9066632K	9066632K
Automatic remote control with electronic thermostat, S/W switch and liquid crystal display T-MB (2) (3)	-	9066331E	9066331E

WARNING

(1) Not to be used with valves. (2) Can be used with valves and/or low temperature cut-out. (3) Can be used with Change Over. (4) Not suitable with -E electric heater. (5) To be used with valve and not to be used with low temperature cut-out.

Options / Accessories

Compatibility table / Codes

Model	YFCN AC motor + MB control devices
Versions	ALL VERSIONS: VC/VCB - Vertical w. casing + HC - Horizontal with casing + CD without casing ALL VERSIONS: VC/VCB + HC + CD with electric heater
Controls and accessories for all versions	
Mounted power unit MB-M	9066332
Not mounted power unit MB-S	9066333
Wall control T-MB	9066331E
IR remote control and mounted IR receiver RM-RT03	9066336
IR remote control and not mounted IR receiver RS-RT03	9066337
IR remote control RT03	3021203
Mounted IR receiver RM	9066339
Not mounted IR receiver RS	9066338
Multifunction wall control up to 60 units PSM-DI	3021293
T2 sensor (to be used as Change-over or minimum temp. Sensor)	9025310
Management system for a network of fan coils with MB electronic board	
Hardware/software supervisory system (to be used with MB board only) NET	9079118
Router-S for NET (default) or for BMS systems no provided by YORK	3021290
Relay output board SIOS	3021292

With T-MB wall control

One control for each unit

(Maximum length of the connection cable = 20 m)



One control for more units (20 units max.)

(Maximum total length of the connection cable = 800 m)



With RT03 Infra-red remote control

One control for each unit



One control for more units (20 units max.)

(Maximum total length of the connection cable = 800 m)




Options / Accessories

Compatibility table / Codes

Model	YFCN ECM motor + Standard control devices		
Versions	VC/VCB mod. - Vertical with casing	HC mod. - Horizontal with casing	CD mod. - Without casing
Controls accessories for all versions (supplied with separate packaging)			
Low temperature cut out NTC for control TMV-T-ECM, WM-S-ECM and UP-AU power unit		3021090	
T2 sensor to be used as Change -over for UP-AU power unit		9025310	
Change over CH 15-25 for control TMV-T-ECM		9053049	
Model	YFCN ECM motor + MB control devices		
Versions	VC/VCB mod. - Vertical with casing	HC mod. - Horizontal with casing	CD mod. - Without casing
Controls for style VC (supplied with separate packaging)			
Continuous fan speed control with electronic thermostat and S/W switch TMV-T-ECM	9060141	-	-
Controls for style HC/CD (supplied with separate packaging)			
JWC-AU Automatic speed control with electronic thermostat and centralized S/W switch (1) (2)	-	9066632K	9066632K
T-MB Automatic remote control with electronic thermostat, S/W switch and liquid crystall display (1) (2)	-	9066331E	9066331E
WM-S-ECM Continuous fan speed control with S/W switch and liquid crystall display	-	9066644	9066644
UPM-AU power unit for JWC-AU and T-MB remote controls, fitted on the unit	9066641	9066641	9066641
UP-AU power unit for JWC-AU and T-MB remote controls, not fitted on the unit	9066640	9066640	9066640
Accessories of controls for VC, HC-VCB and CD models (supplied with separate packaging)			
MB-ECM-M mounted power unit for ECM fan coil	9066334	9066334	9066334
MB-ECM-S not mounted power unit for ECM fan coil	9066335	9066335	9066335
Wall control T-MB	9066331E	9066331E	9066331E
IR remote control and mounted IR receiver RM-RT03	9066336	9066336	9066336
IR remote control and not mounted IR receiver RS-RT03	9066337	9066337	9066337
IR remote control RT03	3021203	3021203	3021203
Mounted IR receiver RM	9066339	9066339	9066339
Not mounted IR receiver RS	9066338	9066338	9066338
Multifunction wall control up to 60 units PSM-DI	3021293	3021293	3021293
T2 sensor (to be used as Change-over or minimum temperature Sensor)	9025310	9025310	9025310
Management system for a network of fan coils with MB electronic board			
Hardware / software supervisory system Net	9079118	9079118	9079118
Router-S for NET (default) or for BMS systems no provided by YORK	3021290	3021290	3021290
Relay output board SIOS	3021292	3021292	3021292

(1) Can be used with valves and/or low temperature cut-out. (2) Can be used with Change Over.

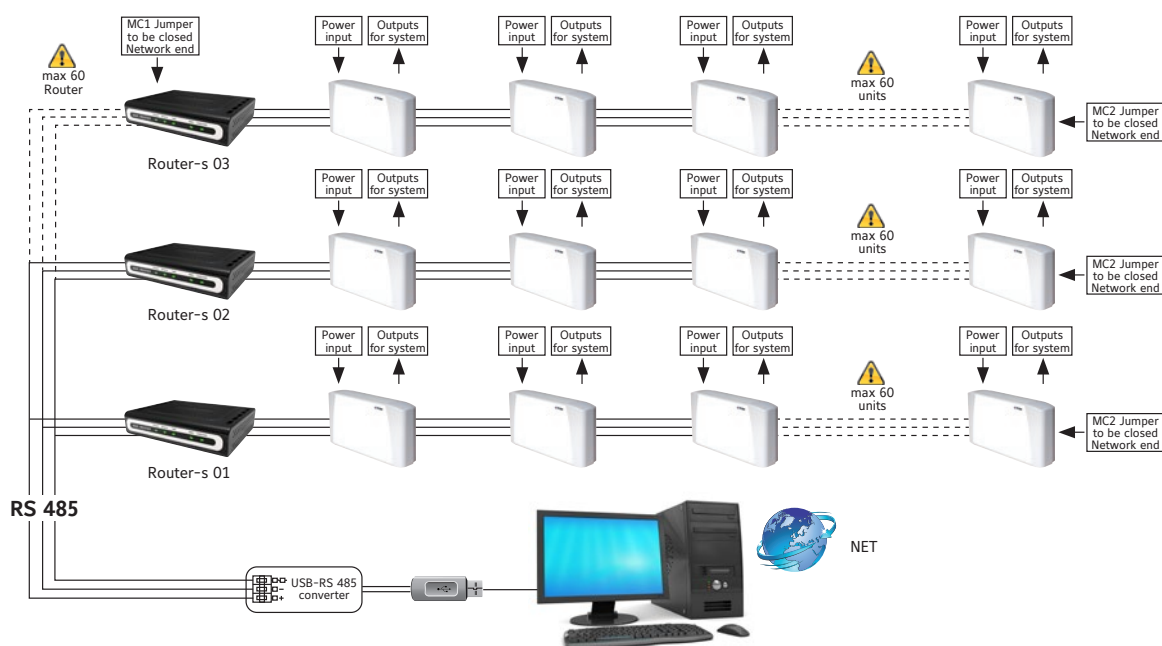

Options / Accessories

Compatibility table / Codes

Model	YFCN General accessories								
Sizes	130/140	230/240	330/340	430/440	530/540	630/640	730/740	830/840	930/940
Valves all versions									
3 way double valve kit for 4 tube installation and single coil + kit fitted on the unit	9066572W								
3 way double valve kit for 4 tube installation and single coil + kit not fitted on the unit	9066562W								
Kit 3 way valve mounted	9066561					9060471			
Kit 3 way valve additional battery mounted	9060472								
Kit 3 way valve not mounted	9066560					9060474			
Kit 3 way valve additional battery not mounted	9060475								
Kit 2 way valve primary and/or additional battery mounted	9060476					-			
Kit 2 way valve primary battery mounted	-					9060477			
Kit 2 way valve primary and/or additional battery not mounted	9060478					-			
Kit 2 way valve primary battery not mounted	-					9060479			
2 way DN 10 balance valve for main coil + kit fitted on the unit	9066660			-					
2 way DN 15 balance valve for main coil + kit fitted on the unit	-			9066661				-	
2 way DN 20 balance valve for main coil + kit fitted on the unit	-							9066662	
2 way DN 10 balance valve for additional coil + kit fitted on the unit	9066663					-			
2 way DN 15 balance valve for additional coil + kit fitted on the unit	-					9066664			
2 way DN 10 balance valve for main coil + kit not fitted on the unit	9066650			-					
2 way DN 15 balance valve for main coil + kit not fitted on the unit	-			9066651				-	
2 way DN 20 balance valve for main coil + kit not fitted on the unit	-							9066652	
2 way DN 10 balance valve for additional coil + kit not fitted on the unit	9066653					-			
2 way DN 15 balance valve for additional coil + kit not fitted on the unit	-					9066654			
Valves CD versions only	130/140	230/240	330/340	430/440	530/540	630/640	730/740	830/840	930/940
Simplified 3-way valve kit for CD version fitted	9066571					9060484			
Simplified 3-way valve kit for CD version not fitted	9066570					9060481			
Simplified 3-way valve kit for CD version not fitted - additional battery	9060480								
Electric heater VC/VCB/CH version	130/140	230/240	330/340	430/440	530/540	630/640	730/740	830/840	930/940
El. resistance and relays fitted on the unit (650 W) VC/HC	9066491E	-							
El. resistance and relays fitted on the unit (400 W) VC/HC	-	9066472E	-						
El. resistance and relays fitted on the unit (600 W) VC/HC	-	9066482E	9066473E		-			-	
El. resistance and relays fitted on the unit (750 W) VC/HC	-				9066475E		-		
El. resistance and relays fitted on the unit (900 W) VC/HC	-		9066483E		-				
El. resistance and relays fitted on the unit (1000 W) VC/HC	-	9066492E	-			9066477E			
El. resistance and relays fitted on the unit (1250 W) VC/HC	-				9066485E		-		
El. resistance and relays fitted on the unit (1500 W) VC/HC	-		9066493E		-		9066487E		
El. resistance and relays fitted on the unit (2000 W) VC/HC	-				9066495E		-		
El. resistance and relays fitted on the unit (2500 W) VC/HC	-						9066497E		
Electric heater CD version	130/140	230/240	330/340	430/440	530/540	630/640	730/740	830/840	930/940
El. resistance and relays fitted on the unit (700 W) CD	9066611	-							
El. resistance and relays fitted on the unit (400 W) CD	-	9066592	-						
El. resistance and relays fitted on the unit (600 W) CD	-	9066602	9066593		-			-	
El. resistance and relays fitted on the unit (750 W) CD	-				9066595		-		
El. resistance and relays fitted on the unit (900 W) CD	-		9066603		-				
El. resistance and relays fitted on the unit (1000 W) CD	-	9066612	-				9066597		
El. resistance and relays fitted on the unit (1250 W) CD	-		-		9066605		-		
El. resistance and relays fitted on the unit (1500 W) CD	-		9066613		-		9066607		
El. resistance and relays fitted on the unit (2000 W) CD	-				9066615		-		
El. resistance and relays fitted on the unit (2500 W) CD	-						9066617		

Options / Accessories

Compatibility table / Codes


Model	YFCN General accessories								
Sizes	130/140	230/240	330/340	430/440	530/540	630/640	730/740	830/840	930/940
Accessories for all versions									
Pair feet	9060150						9060151		
Vertical auxiliary condensate tray					6060400				
Horizontal auxiliary condensate tray for HC (left connections)					6060402				
Horizontal auxiliary condensate tray for HC (right connections)					6060403				
Horizontal auxiliary condensate tray for CD					6066039				
Condensate pump for VC - VCB - CD fitted on the unit auxiliary condensate collection tray included (vertical installation)					9066297				
Condensate pump for VC - VCB - CD not fitted on the unit auxiliary condensate collection tray included (vertical installation)					9066296				
Condensate pump for HD fitted on the unit auxiliary condensate collection tray to be ordered separately (horizontal installation)					9066295				
Condensate pump for CD not fitted on the unit auxiliary condensate collection tray included (horizontal installation)					9066180				
Condensate drain pipe					6060420				
Damper	9066531	9066532	9066533	9066535		9066537	9066538		
Kit breeze	-	9076452	9076453	9076455		-			
Recessed box	-	9076462	9076463	9076465		-			
Rear closing panel VC	9062005	9060180	9060181	9060182		9060183			
Rear closing panel HC	9060187	9060190	9060191	9060192		9060193	9060194		
Frontal air intake CD mounted	9066501	9066502	9066503	9066505		9066507	9066508		
Intake grid for VC	9060229	9060230	9060231	9060232		9060233			
Adaptor for terminal board VC for remote control					9060103				
Accessories only for concealed version CD									
Outlet flange 90° FM90	9066381	9066382	9066383		9066385		9066387	9066388	
Inlet flange 90° FR90	9066441	9060710	9060711		9060712		9060713	9060714	
Straight inlet flange FRD	9066451	9060720	9060721		9060722		9060723	9060724	
Straight outlet flange FMD	9066371	9066372	9066373		9066375		9066377	9066378	
Outlet spigot diffuser PMC	9066361	9066362	9066363		9066365		9066367	9066368	
Air outlet grid BMA	9066411	9060750	9060751		9060752		9060753		
Air inlet grid GRAG	9066431	9060764	9060765		9060766		9060767		
Air inlet grid GRAP	9066421	9060760	9060761		9060762		9060763		
Air inlet spigot plenum PRC	9066461	9066462	9066463		9066465		9066467	9066468	
Intake grid with filter (to be used in combination with inlet flange 90°) GRAFP	9066391	9060770	9060771		9060772		9060773		
Intake grid with filter (to be used in combination with straight inlet flange) GRAFG	9066401	9060774	9060775		9060776		9060777		
Silencer Plenum BXS	-	-	9069081		9069082		9069083		
Hotel box kit for concealed installation for horizontal model (frontal return and air supply) CHK	-	-	9066783		9066785		9066787	-	-

Dimensions

YFCN / YFCN-ECM 130 to 940 (with casing)




VC, VCB and HC models

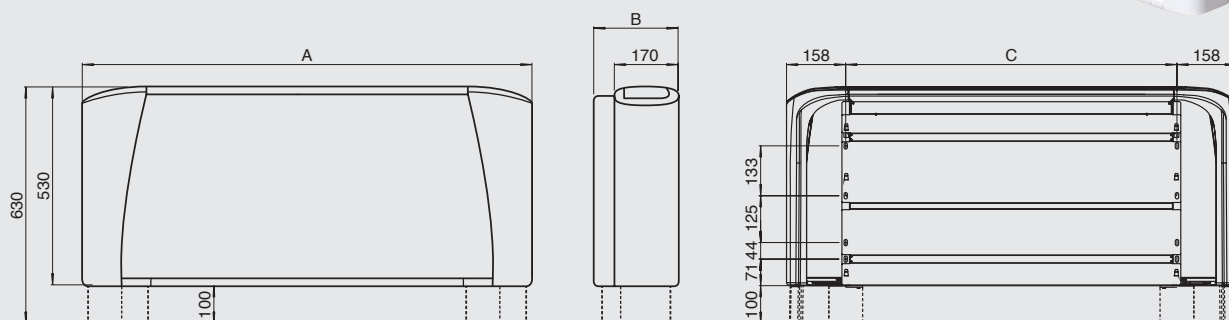


All dimensions in mm. Drawings not a scale.

Model	130 / 140	230 / 240	330 / 340	430 / 440	530 / 540	630 / 640	730 / 740	830 / 840	930 / 940
A	670	770	985	985	1 200	1 200	1 415	1 415	1 415
B	225	225	225	225	225	225	225	255	255
C	354	454	669	669	884	884	1 099	1 099	1 099

YFCN / YFCN-ECM 130 to 940 (without casing)



CD models

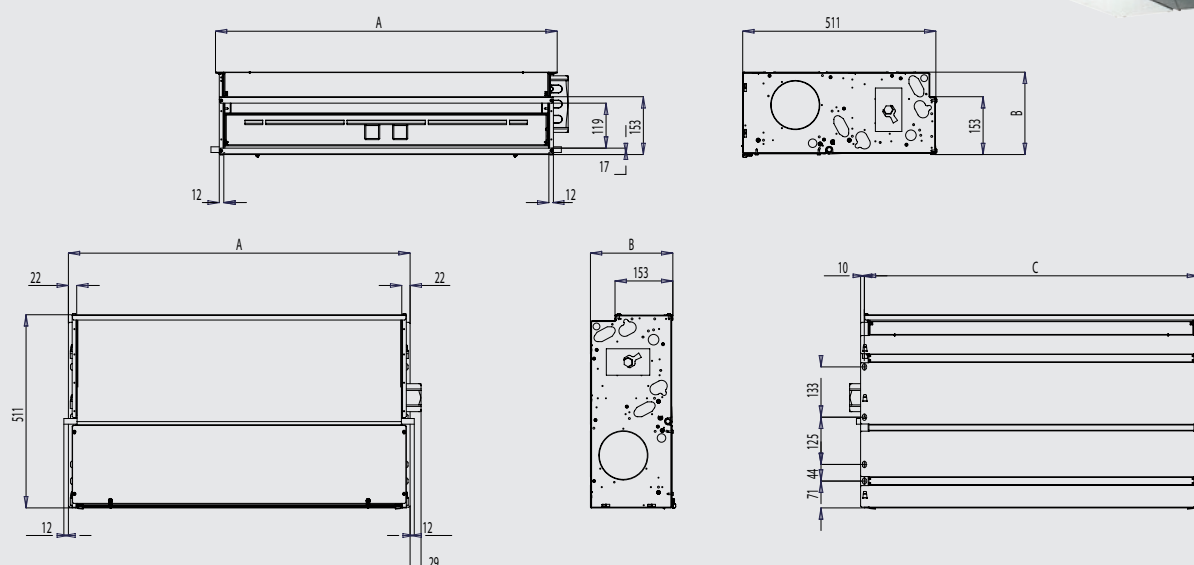

All dimensions in mm. Drawings not a scale.

Model	130 / 140	230 / 240	330 / 340	430 / 440	530 / 540	630 / 640	730 / 740	830 / 840	930 / 940
A	374	474	689	689	904	904	1 119	1 119	1 119
B	218	218	218	218	218	218	218	248	248
C	354	454	669	669	884	884	1 099	1 099	1 099

LASER & LOW BODY Fan Coil Units

2 & 4 pipe system

A complete range from 0.6 kW up to 9.7 kW



TUC03+ Terminal unit controller
BacNET and N2 Metasys network compatible



CSL00 (Built in)
CSR00 (Wall mounted)
Fan speed selector



CML00 (Built in)
CMR00 (Wall mounted)
Thermostat with manual fan speed and S/W change over



CEL00 (Built in)
CER00 (Wall mounted)
Thermostat with manual fan speed and automatic change over

CEL20 (Built in)
CER20 (Wall mounted)
Thermostat with auto. fan speed and automatic change over

CEL30 (Built in)
CER30 (Wall mounted)
Thermostat with auto. fan speed and automatic change over for modulating valve

LASER fan coil units are simple and elegant, discreet in their design. High standards of quality and reliability, combined with a wide range of accessories ensure a total solution for all comfort cooling and heating requirements.

LOW BODY units are part of the LASER Fan Coils Units family. The reduced height cabinet makes them the ideal solution for new or replacement applications where dimensional limitations apply.

Features

- 6 speed fan
- Cabinet factory fitted
- Valve factory fitted
- Electrical heater factory fitted
- Thermal or modulating valve
- Service valve
- Option front air intake (LASER)
- Optional plenum (LASER)
- ECM inverter option available
- Option for district cooling coil
- EUROVENT Certified



Selection software

LASER & LOW BODY Fan Coil Units

0.6 kW to 9.7 kW



Technical features

Model		LASER: YLV, YLV-AF, YLH, YLH-AF, YLIV, YLIV-AF, YLIH, YLIH-AF										
Sizes		110	112	114	216	218	220	222	224	226	328	
Total cooling capacity [kW]	(1)	max	1.11	1.59	2.14	3.30	3.50	4.44	5.07	6.43	7.25	9.73
		med	0.95	1.31	1.88	2.67	2.99	3.68	4.39	5.75	6.67	8.75
		min	0.76	1.07	1.57	2.20	2.46	2.94	3.84	4.62	5.50	6.36
Sensible cooling capacity [kW]	(1)	max	0.93	1.25	1.90	2.46	3.06	3.53	4.42	5.06	5.70	8.04
		med	0.78	0.99	1.64	1.95	2.51	2.84	3.74	4.44	5.18	7.15
		min	0.61	0.79	1.33	1.56	2.00	2.20	3.20	3.45	4.15	5.03
Water flow in cooling [l/h]	(1)	max	191	274	368	568	602	764	873	1107	1248	1675
		med	164	225	324	460	515	633	756	990	1148	1506
		min	131	184	270	379	423	506	661	795	947	1095
Pressure drop in cooling [kPa]	(1)	max	3.4	7.1	5.8	14.8	13.6	24.1	28.4	18.8	21.0	74.6
		med	2.8	5.0	4.6	12.5	9.8	17.4	21.8	15.5	18.1	61.5
		min	2.0	3.4	3.3	8.5	6.7	11.6	17.2	10.5	12.8	30.8
Heating capacity 2 pipes [kW]	(2)	max	1.37	1.83	2.60	3.46	4.17	4.80	6.04	6.60	7.86	10.54
		med	1.13	1.46	2.07	2.90	3.51	3.89	5.11	5.84	7.17	9.64
		min	0.87	1.14	1.70	2.31	2.83	3.01	4.41	4.58	5.76	6.73
Water flow in heating 2 pipes [l/h]	(2)	max	236	315	448	596	718	826	1040	1136	1353	1814
		med	194	251	356	499	604	669	879	1004	1233	1658
		min	150	196	292	397	487	518	759	788	991	1158
Pressure drop in heating 2 pipes [kPa]	(2)	max	4.9	6.0	6.5	14.7	16.0	23.4	27.7	18.9	25.3	82.4
		med	4.6	6.0	5.1	10.5	11.7	16.3	21.1	15.3	21.6	67.7
		min	3.0	4.1	4.0	6.9	8.1	10.8	16.4	10.3	14.9	29.7
Heating capacity 4 pipes [kW]	(3)	max	0.91	1.31	1.93	2.79	3.20	4.33	4.92	6.16	6.30	8.00
		med	0.83	1.13	1.85	2.40	2.81	3.67	4.33	5.55	5.98	7.43
		min	0.71	0.95	1.51	2.06	2.38	2.99	3.84	4.55	5.03	5.83
Water flow in heating 4 pipes [l/h]	(3)	max	78	113	166	240	275	373	423	530	542	688
		med	71	97	159	207	242	316	373	478	515	639
		min	61	82	130	177	205	257	330	391	433	501
Pressure drop in heating 4 pipes [kPa]	(3)	max	1.3	3.4	6.7	14.7	7.1	10.3	11.7	33.0	31.7	46.5
		med	1.1	2.6	5.8	10.5	5.7	7.7	9.5	23.0	28.9	40.6
		min	0.9	1.8	5.2	9.4	4.0	5.4	7.7	16.3	21.4	24.7
Air flow [m3/h]		max	243	317	432	606	754	961	1115	1307	1507	2010
		med	181	253	352	488	616	776	928	1106	1318	1687
		min	136	185	279	377	486	594	742	779	986	1107
Sound power level [dB(A)]		max	48	50	54	53	55	54	60	60	63	67
		med	42	45	49	47	50	48	56	55	60	63
		min	36	38	42	40	43	40	50	47	53	52
Sound pressure level [dB(A)]	(4)	max	39	41	45	44	46	45	51	51	54	58
		med	33	36	40	38	41	39	47	46	51	54
		min	27	29	33	31	34	31	40	38	44	43
Power supply [V-ph-Hz]		230 / 1 / 50 + E										
Power input [W]		max	46	48	57	61	76	90	117	140	162	213
Absorbed current [A]		max	0.21	0.21	0.25	0.27	0.33	0.39	0.52	0.64	0.71	0,95
Dimensions	Height	mm	538	538	538	538	538	614	614	614	614	614
	Width	mm	648	773	898	1023	1148	1273	1273	1523	1523	1773
	Depth	mm	224	224	224	224	224	254	254	254	254	254

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C

(3) Room temperature 20°C - Water inlet temperature: 65/55°C.

(4) Sound pressure level in a 100 m³ room, at 1.5 m distance and riverberating time of 0.3 s. max = speed 2, med = speed 3, min = speed 5 when using selection software



Manufacturer reserves the rights to change specifications without prior notice.

LASER & LOW BODY Fan Coil Units

0.6 kW to 9.7 kW



Technical features

Model			LOW BODY: YLVR, YLVR				
Sizes			110	112	114	216	218
Total cooling capacity [kW]	(1)	max	0.98	1.21	1.87	2.74	3.23
		med	0.81	1.02	1.61	2.35	2.81
		min	0.64	0.80	1.37	1.84	2.37
Sensible cooling capacity [kW]	(1)	max	0.90	1.09	1.62	2.32	2.71
		med	0.73	0.92	1.39	1.97	2.34
		min	0.56	0.71	1.15	1.54	1.95
Water flow in cooling [l/h]	(1)	max	166	207	318	519	614
		med	139	175	274	442	531
		min	109	137	233	346	446
Pressure drop in cooling [kPa]	(1)	max	2.5	3.5	8.4	7.1	10.2
		med	1.9	2.6	6.5	5.4	7.9
		min	1.3	1.8	5.0	3.6	5.9
Heating capacity 2 pipes [kW]	(2)	max	1.18	1.53	2.22	3.16	3.78
		med	0.95	1.29	1.9	2.67	3.25
		min	0.76	1.02	1.58	2.18	2.71
Water flow in heating 2 pipes [l/h]	(2)	max	204	265	384	595	717
		med	163	224	328	501	612
		min	130	176	273	405	506
Pressure drop in heating 2 pipes [kPa]	(2)	max	2.5	4.2	9.3	7.3	11.8
		med	1.7	3.2	7.1	5.4	8.9
		min	1.2	2.1	5.2	3.7	6.4
Heating capacity 4 pipes [kW]	(3)	max	1.12	1.79	1.87	2.54	3.83
		med	0.93	1.54	1.65	2.22	3.37
		min	0.77	1.25	1.42	1.89	2.88
Water flow in heating 4 pipes [l/h]	(3)	max	98	157	165	224	338
		med	81	135	145	196	297
		min	68	109	125	167	254
Pressure drop in heating 4 pipes [kPa]	(3)	max	1.8	4.8	6.5	11.8	5.9
		med	1.3	3.7	5.2	9.4	4.7
		min	1.0	2.5	4.0	7.1	3.6
Air flow [m3/h]		max	243	317	432	606	754
		med	181	253	352	488	616
		min	136	185	279	377	486
Sound power level [dB(A)]		max	47	50	53	51	55
		med	41	44	49	45	50
		min	34	38	42	39	43
Sound pressure level [dB(A)]	(4)	max	37	40	44	42	46
		med	31	35	39	36	41
		min	25	29	33	29	34
Power supply [V-ph-Hz]			230 / 1 / 50 + E				
Power input [W]			46	48	57	61	76
Absorbed current [A]			0.21	0.21	0.25	0.27	0.33
Dimensions	Height	mm	430	430	430	430	430
	Width	mm	648	773	898	1023	1148
	Depth	mm	254	254	254	254	224

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C

(3) Room temperature 20°C - Water inlet temperature: 65/55°C.

(4) Sound pressure level in a 100 m³ room, at 1.5 m distance and riverberating time of 0.3 s. max = speed 2, med = speed 3, min = speed 5 when using selection software



Manufacturer reserves the rights to change specifications without prior notice.

Options / Accessories

Compatibility table / Codes

Model		LASER										LOW BODY				
Sizes		110	112	114	216	218	220	222	224	226	328	110	112	114	216	218
With Cabinet																
YLV-YLH	2/3/4 rows	•	•	•	•	•	•	•	•	•	•					
YLV-YLH/AF Front air intake	2/3/4 rows	•	•	•	•	•	•	•	•	•	•					
YLVR	2/3 rows											•	•	•	•	•
Without Cabinet																
YLIV-YLIH	2/3/4 rows	•	•	•	•	•	•	•	•	•	•					
YLIV-YLIH/AF Front air intake	2/3/4 rows	•	•	•	•	•	•	•	•	•	•					
YLIVR	2/3 rows											•	•	•	•	•
Options (Factory fitted)																
Coil and heaters																
1 row heating	BA1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Kit electrical heater (with relay and safety switch)	KREL	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Built in thermostat																
Fan speed selector	CSL00										•					
Thermostat with manual fan speed and S/W change over	CML00										•					
Thermostat with manual fan speed, dead band, automatic change over	CEL00										•					
Thermostat with automatic fan speed, dead band, automatic change over	CEL20										•					
Thermostat with automatic fan speed, dead band, automatic change over for modulating valve	CEL30										•					
Parallel connection																
For ON/OFF valve one/FCU	CBL20										•					
For modulating valve one/FCU	CBL30										•					
3 way valve factory fitted																
For 2 pipe systems ON/OFF	J3A2 (2p)										•					
For 4 pipe systems ON/OFF	J3A2 (4p)										•					
3 way modulating valve factory fitted																
For 2 pipe systems Modulating	J3AM (2p)										•					
For 4 pipe systems Modulating	J3AM (4p)										•					
Shut off valves factory fitted																
For 2 pipe systems	DT (2p)										•					
For 4 pipe systems	DT (4p)										•					
Condensate pump	PC										•					
WS sensor change over for CEL/CER	WS										•					
Minimum temperature thermostat	TM										•					
Accessories (Supplied loose)																
Remote controllers and thermostat (wall mounted)																
Fan speed selector	CSR00										•					
Thermostat with manual fan speed and S/W change over	CMR00										•					
Thermostat with manual fan speed, dead band, automatic change over	CER00										•					
Thermostat with automatic fan speed, dead band, automatic change over	CER20										•					
Thermostat with automatic fan speed, dead band, automatic change over for modulating valve	CER30										•					
Feet and panel (1)																
Set of painted feet	CP1	•	•	•	•	•	•	•	•	•	•					
Set of painted feet + frontal socle	ZL1	•	•	•	•	•	•	•	•	•	•					
Vertical painted back panel	PPV1	•	•	•	•	•	•	•	•	•	•					
Horizontal painted back panel	PPH1	•	•	•	•	•	•	•	•	•	•					
Plenums and air intake (1)																
Air intake plenum	PA	•	•	•	•	•	•	•	•	•	•					
Air intake plenum with collars	PAS	•	•	•	•	•	•	•	•	•	•					
90° air intake plenum	PA90	•	•	•	•	•	•	•	•	•	•					
Air intake duct fitting	RCA	•	•	•	•	•	•	•	•	•	•					
Air delivery plenum with collars	PM	•	•	•	•	•	•	•	•	•	•					
90° air delivery plenum	PM90	•	•	•	•	•	•	•	•	•	•					

(1) for check compatibility with the models of FCU see compatibility table

Dimensions & Weights

YLV & YLH

- ▶ V= vertical
- ▶ H= horizontal

YLH-AF & YLV-AF


- ▶ AF= front air intake
- ▶ V= vertical
- ▶ H= horizontal

YLV-R

- ▶ R= low body
- ▶ V= vertical


LASER: YLV - YLV/AF

VERTICAL

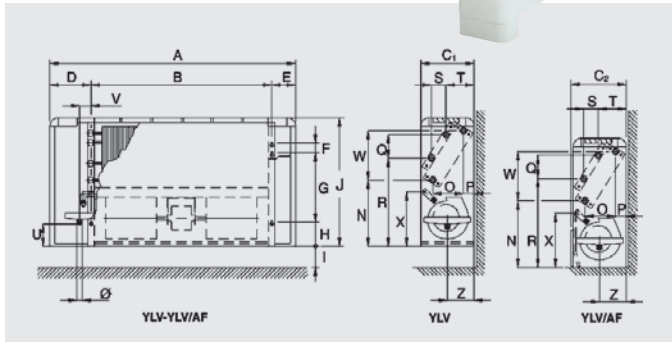

LASER: YLH - YLH/AF


HORIZONTAL

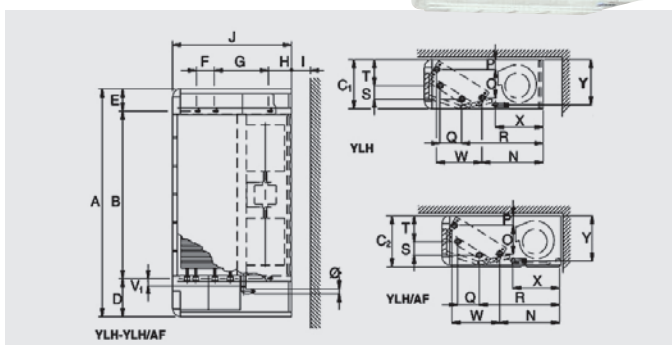

Dim	110	112	114	216	218	220	222	224	226	328
A	648	773	898	1023	1148	1273	1273	1523	1523	1773
B	374	499	624	749	874	999	999	1249	1249	1499
C1	224	224	224	224	224	254	254	254	254	254
C2	233	233	233	233	233	263	263	263	263	263
D	174	174	174	174	174	174	174	174	174	174
E	100	100	100	100	100	100	100	100	100	100
F	40	40	40	40	40	40	40	40	40	40
G	280	280	280	280	280	356	356	356	356	356
H	101	101	101	101	101	101	101	101	101	101
I	85	85	85	85	85	85	85	85	85	85
J	538	538	538	538	538	614	614	614	614	614
N	266	266	266	266	266	299	299	299	299	299
O	113	113	113	113	113	138	138	138	138	138
P	48	48	48	48	48	53	53	53	53	53
Q	87	87	87	87	87	87	87	87	87	87
R	355	355	355	355	355	409	409	409	409	409
S	50	50	50	50	50	50	50	50	50	50
T	117	117	117	117	117	135	135	135	135	135
U	90	90	90	90	90	116	116	116	116	116
V	47	47	47	47	47	47	47	47	47	47
V1	28	28	28	28	28	28	28	28	28	28
W	195	195	195	195	195	238	238	238	238	238
X	219	219	219	219	219	252	252	252	252	252
Y	205	205	205	205	205	235	235	235	235	235
Z	109	109	109	109	109	122	122	122	122	122
Ø	20	20	20	20	20	20	20	20	20	20
kg1	18	20	23	28	31	41	44	52	52	58
kg2	19	21	24	30	32	43	46	54	54	61

Notes: 1=YLV / YLH - 2=YLV/AF / YLH/AF (All dimensions in mm)

LOW BODY: YLVR

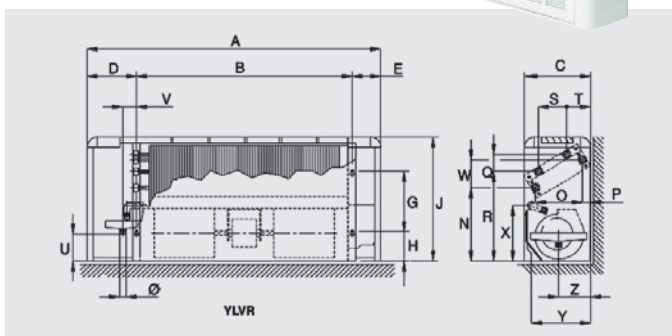

Dim	110	112	114	216	218
A	648	773	898	1023	1148
B	374	499	624	749	874
C	254	254	254	254	254
D	174	174	174	174	174
E	100	100	100	100	100
G	170	170	170	170	170
H	101	101	101	101	101
J	430	430	430	430	430
N	245	245	245	245	245
O	154	154	154	154	154
P	31	31	31	31	31
Q	47	47	47	47	47
R	304	304	304	304	304
S	88	88	88	88	88
T	87	87	87	87	87
U	65	65	65	65	65
V	47	47	47	47	47
W	84	84	84	84	84
X	214	214	214	214	214
Z	109	109	109	109	109
Ø	20	20	20	20	20
kg	15	17	22	23	26

(All dimensions in mm)

Dimensions & Weights

YLIV & YLIH

- ▶ V= vertical
- ▶ H= horizontal
- ▶ l= without cabinet

YLIV-AF & YLIH-AF


- ▶ AF= front air intake
- ▶ V= vertical
- ▶ H= horizontal
- ▶ l= without cabinet

YLIVR

- ▶ R= low body
- ▶ V= vertical
- ▶ l= without cabinet


LASER: YLIV - YLIV/AF

VERTICAL

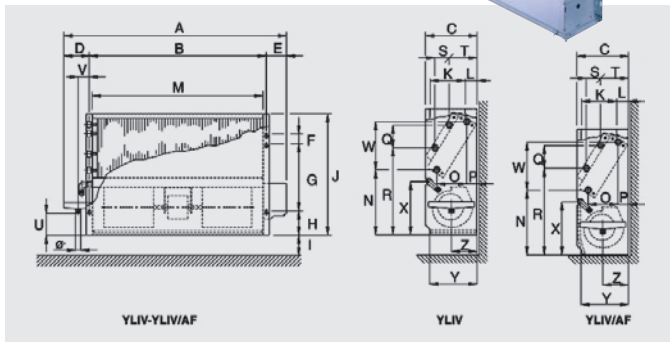


LASER: YLIH - YLIH/AF

HORIZONTAL

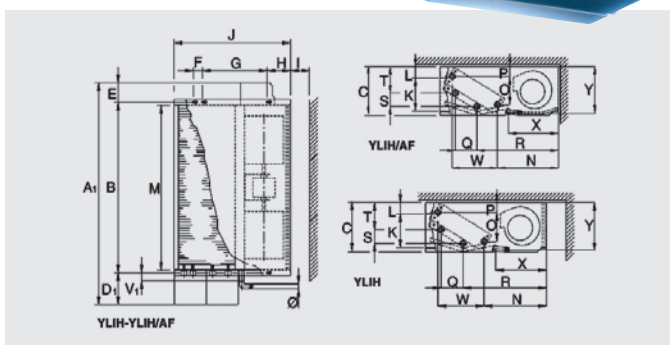

LOW BODY: YLIVR

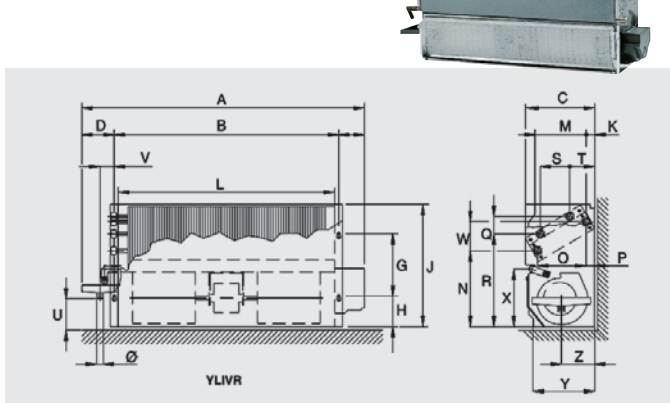

Dim	110	112	114	216	218	220	222	224	226	328
A	555	680	805	930	1055	1180	1180	1430	1430	1680
A 1	574	699	824	949	1074	1199	1199	1449	1449	1699
B	374	499	624	749	874	999	999	1249	1249	1499
C	215	215	215	215	215	245	245	245	245	245
D	109	109	109	109	109	109	109	109	109	109
D 1	128	128	128	128	128	128	128	128	128	128
E	72	72	72	72	72	72	72	72	72	72
F	40	40	40	40	40	40	40	40	40	40
G	280	280	280	280	280	356	356	356	356	356
H	101	101	101	101	101	101	101	101	101	101
I	85	85	85	85	85	85	85	85	85	85
J	505	505	505	505	505	581	581	581	581	581
K	110	110	110	110	110	125	125	125	125	125
L	55	55	55	55	55	60	60	60	60	60
M	349	474	599	724	849	974	974	1224	1224	1474
N	266	266	266	266	266	299	299	299	299	299
O	113	113	113	113	113	138	138	138	138	138
P	48	48	48	48	48	53	53	53	53	53
Q	87	87	87	87	87	87	87	87	87	87
R	355	355	355	355	355	409	409	409	409	409
S	50	50	50	50	50	50	50	50	50	50
T	117	117	117	117	117	135	135	135	135	135
U	90	90	90	90	90	116	116	116	116	116
V	47	47	47	47	47	47	47	47	47	47
V 1	28	28	28	28	28	28	28	28	28	28
W	195	195	195	195	195	238	238	238	238	238
X	219	219	219	219	219	252	252	252	252	252
Y	200	200	200	200	200	230	230	230	230	230
Z	109	109	109	109	109	122	122	122	122	122
Ø	20	20	20	20	20	20	20	20	20	20
kg	10	13	16	19	22	29	31	38	38	42

(All dimensions in mm)

Dim	110	112	114	216	218
A	555	680	805	930	1055
B	374	499	624	749	874
C	230	230	230	230	230
D	108	108	108	108	108
E	73	73	73	73	73
G	170	170	170	170	170
H	101	101	101	101	101
J	395	395	395	395	395
K	61	61	61	61	61
L	349	474	599	724	849
M	127	127	127	127	127
N	245	245	245	245	245
O	154	154	154	154	154
P	31	31	31	31	31
Q	47	47	47	47	47
R	304	304	304	304	304
S	88	88	88	88	88
T	87	87	87	87	87
U	65	65	65	65	65
V	47	47	47	47	47
W	84	84	84	84	84
X	214	214	214	214	214
Y	201	201	201	201	201
Z	109	109	109	109	109
Ø	20	20	20	20	20
kg	9	11	14	16	19

(All dimensions in mm)

LASER & LOW BODY Fan Coil Units

Compatibility tables




**CSL00 (Built in)
CSR00 (Wall mounted)**
Fan speed selector



**CEL00 (Built in)
CER00 (Wall mounted)**
Thermostat with manual fan speed and automatic change over



**CML00 (Built in)
CMR00 (Wall mounted)**
Thermostat with manual fan speed and S/W change over



**CEL30 (Built in)
CER30 (Wall mounted)**
Thermostat with auto. fan speed and automatic change over for modulating valve

Features CEL/CER

- Dead band for change over 5°C or 2°C (factory set 2°C)
- Manual fan speeds or automatic (models 20 and 30)
- Thermostated fan control or continuous fan running
- Option water sensor WS for change over on coil (for 2 pipes)
- Led indicated status summer, winter or dead band
- Temperature setting for 7 to 30°C (comfort 20-25°C)
- Plastic pins for limiting temperature range
- Input for window contact
- Input for Economy/ occupancy mode
- Output for remote alarm
- Filter alarm 600 or 1200 running hours (factory set 1200 hours)
- With electrical heater post ventilation
- With Air sensor in the air intake destratification function (CEL only)

Compatibility table Thermostats / Valves / Heaters / Parallel connection / Water sensor / Minimum temperature thermostat

Factory fitted thermostat (built in)		Valves for 2 pipes		Valves for 4 pipes		Heaters KREL	Parallel connection		Water sensor WS	Min. Temp. Thermostat TM
		J3A2 (2p)	J3AM (2p)	J3A2 (4p)	J3AM (4p)		ON/OFF CBL20	Modulating CBL30		
CSL00	Fan speed selector						•			•
CML00	Thermostat with manual fan speed and S/W change over	•		•			•			•
CEL00	Thermostat with manual fan speed, dead band, automatic change over	•		•		•	•		•	•
CEL20	Thermostat with automatic fan speed, dead band, automatic change over	•		•		•	•		•	•
CEL30	Thermostat with automatic fan speed, dead band, automatic change over for modulating valve		•		•			•	•	•

Remote controllers and thermostats (wall mounted)										
CSR00	Fan speed selector						•			•
CMR00	Thermostat with manual fan speed and S/W change over	•		•			•			•
CER00	Thermostat with manual fan speed, dead band, automatic change over	•		•		•	•		•	•
CER20	Thermostat with automatic fan speed, dead band, automatic change over	•		•		•	•		•	•
CER30	Thermostat with automatic fan speed, dead band, automatic change over for modulating valve		•		•			•	•	•

• Compatible ☐ Not compatible

LASER & LOW BODY Fan Coil Units

Compatibility tables



Compatibility Options / Accessories / Models

		STANDARD								LOW BODY	
		LASER				CONCEALED					
Code	Designation	YLV	YLH	YLV-AF	YLH-AF	YLIV	YLIH	YLIV-AF	YLIH-AF	YLVr	YLIVr
Coils and heaters**											
BA1**	Additional 1 row heating	•	•	•	•	•	•	•	•	•	•
KREL**	Kit electrical heater with safety thermostat and relay	•	•	•	•	•	•	•	•		
Factory fitted thermostat (built in)											
CSL00	Fan speed selector (built in)	•		•		•		•		•	•
CML00	Thermostat with manual fan speed and S/W change over	•		•		•		•		•	•
CEL00	Thermostat with manual fan speed, dead band, automatic change over	Compatible with electrical heaters								•	•
CEL20	Thermostat with automatic fan speed, dead band, automatic change over	Compatible with electrical heaters								•	•
CEL30	Thermostat with automatic fan speed, dead band, automatic change over for modulating valves	•		•		•		•		•	•
CBL20	Parallel connection for ON/OFF valve	•	•	•	•	•	•	•	•	•	•
CBL30	Parallel connection for modulating valve	•	•	•	•	•	•	•	•	•	•
Remote controllers and thermostats (wall mounted)											
CSR00	Fan speed selector (wall mounted)	•	•	•	•	•	•	•	•	•	•
CMR00	Thermostat with manual fan speed and S/W change over	•	•	•	•	•	•	•	•	•	•
CER00	Thermostat with manual fan speed, dead band, automatic change over	Compatible with electrical heaters								•	•
CER20	Thermostat with automatic fan speed, dead band, automatic change over	Compatible with electrical heaters								•	•
CER30	Thermostat with automatic fan speed, dead band, automatic change over for modulating valves	•	•	•	•	•	•	•	•	•	•
Valves / Condensate pump / Water sensor / Minimum temperature thermostat (Factory fitted)											
J3A2 (2p)	3-way 4-ports on/off valves for 2-pipe systems	•	•	•	•	•	•	•	•	•	•
J3A2 (4p)	3-way 4-ports on/off valves for 4-pipe systems	•	•	•	•	•	•	•	•	•	•
J3AM (2p)	3-way 4-ports modulating valves for 2-pipe systems	•	•	•	•	•	•	•	•	•	•
J3AM (4p)	3-way 4-ports modulating valves for 4-pipe systems	•	•	•	•	•	•	•	•	•	•
DT (2p)	Shut-off valves for 2-pipe systems (in addition to J3A2/J3AM valves)	•	•	•	•	•	•	•	•	•	•
DT (4p)	Shut-off valves for 4-pipe systems (in addition to J3A2/J3AM valves)	•	•	•	•	•	•	•	•	•	•
PC	Condensate pump	•	•	•	•	•	•	•	•	•	•
WS	Water sensor	Compatible with CEL/CER									
TM	Minimum temperature thermostat	•	•	•	•	•	•	•	•	•	•
Feet and panels											
CP1	Set of painted feet	•				•					
ZL1	Set of feet + frontal socle	•									
PPV1	Vertical painted back panel	•		•						•	
PPH1	Horizontal painted back panel		•		•						
External air intake											
PA	Air intake plenum						•				
PAS	Air intake plenum collars						•				
PA90	90° air intake plenum						•				
RCA	Air intake duct fitting						•				
PM	Air delivery plenum with collars					•	•	•	•		•
PM90	90° air delivery plenum					•	•	•	•		•

• Compatible

Compatible with conditions

Not compatible

** Maximum of rows is indicated in the documentation, the maximum number of rows includes the heating row or electrical heater.

LASER ECM and LOW BODY ECM Inverter Fan Coil Units

0.6 kW to 9.2 kW



ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.

Technical features

Model		LASER ECM							LOW BODY ECM			
Sizes	(*)	512	514	516	520	522	524	528	512	514	516	
Total cooling capacity [kW]	(1)	max ...v	1.98	2.56	3.81	5.05	5.81	7.47	9.18	1.56	2.37	3.40
		med ...v	1.43	1.81	2.53	3.86	4.42	5.64	6.94	1.18	1.78	2.34
		min ...v	0.74	0.93	1.51	2.72	3.05	4.07	4.89	0.61	1.29	1.53
Sensible cooling capacity [kW]	(1)	max	1.65	2.12	3.14	3.79	4.32	6.09	7.51	1.42	2.09	2.93
		med	1.16	1.48	2.01	2.78	3.16	4.42	5.50	1.04	1.54	1.96
		min	0.54	0.78	1.21	1.92	2.11	3.13	3.74	0.53	1.09	1.25
Water flow in cooling [l/h]	(1)	max	341	441	656	869	1000	1286	1580	265	404	644
		med	246	312	435	664	761	971	1194	200	304	440
		min	127	160	260	468	525	701	842	104	220	286
Pressure drop in cooling [kPa]	(1)	max	9.6	9.2	14.6	16.9	36.2	16.8	31.3	8.2	12.6	10.3
		med	5.4	4.8	8.5	10.6	22.0	10.0	18.5	5.1	7.8	5.4
		min	1.7	1.6	3.9	5.6	11.1	5.5	9.7	1.8	4.5	2.6
Heating capacity 2 pipes [kW]	(2)	max	2.05	3.04	4.40	5.76	6.53	8.43	10.4	2.07	2.85	4.00
		med	1.47	2.18	3.05	4.44	4.84	6.22	7.67	1.50	2.09	2.66
		min	0.78	1.15	1.87	3.11	3.37	4.50	5.38	0.8	1.49	1.77
Water flow in heating 2 pipes [l/h]	(2)	max	353	523	757	991	1124	1451	1790	358	495	763
		med	253	375	525	757	833	1071	1320	260	362	499
		min	134	198	322	535	580	775	926	138	258	325
Pressure drop in heating 2 pipes [kPa]	(2)	max	10.8	10.3	17.3	21.8	40.0	17.2	32.2	9.7	14.4	11.2
		med	6.0	5.5	8.6	13.0	23.5	9.8	18.0	5.6	8.4	5.3
		min	2.0	2.0	4.2	6.6	11.5	5.3	9.0	1.9	4.7	2.6
Heating capacity 4 pipes [kW]	(3)	max	1.84	2.39	3.20	5.00	5.55	6.46	7.90	2.19	2.29	3.06
		med	1.37	1.76	2.40	4.12	4.35	5.19	6.30	1.66	1.78	2.22
		min	0.87	1.09	1.77	3.22	3.29	4.09	4.94	0.97	1.36	1.60
Water flow in heating 4 pipes [l/h]	(3)	max	158	206	275	430	478	556	680	194	201	271
		med	118	151	207	355	374	447	542	146	157	196
		min	75	94	152	277	283	352	425	84	119	141
Pressure drop in heating 4 pipes [kPa]	(3)	max	4.7	9.3	15.6	23.3	21.5	36.0	46.2	6.9	9.2	16.5
		med	2.8	5.4	11.0	15.9	14.0	24.2	30.7	4.2	6.0	9.3
		min	1.2	2.4	5.6	9.8	7.7	15.4	19.5	1.0	3.7	5.3
Air flow [m3/h]		max	456	574	792	1082	1304	1567	1995	437	608	833
		med	298	373	489	757	904	1080	1370	284	400	486
		min	138	170	287	504	568	715	876	129	259	290
Sound power level [dB(A)]		max	55	59	60	57	62	63	69	55	53	56
		med	44	48	47	48	51	53	59	42	42	44
		min	29	29	33	37	39	43	48	30	33	30
Sound pressure level [dB(A)]	(4)	max	46	50	51	48	53	54	60	46	44	46
		med	35	39	38	37	42	44	50	33	32	34
		min	21	21	24	26	30	34	39	20	24	20
Power supply [V-ph-Hz]		230 / 1 / 50 + E										
Power input [W]		max	31	54	42	46	76	89	168	35	60	38
Dimensions	Height	mm	623	623	623	699	699	699	699	395	395	395
	Width	mm	773	898	1023	1273	1273	1523	1773	680	805	930
	Depth	mm	224	224	224	254	254	254	254	230	230	230

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C

(3) Room temperature 20°C - Water inlet temperature: 65/55°C.

(4) Sound pressure level in a 100 m³ room, at 1.5 m distance and riverberating time of 0.3 s.

(*) 512 - 514 (3v-6v-9v) | 516 (2v-5v-10v) | 520 - 522 - 524 - 528 (3v-6v-10v)



Manufacturer reserves the rights to change specifications without prior notice.

LASER ECM and LOW BODY ECM Inverter Fan Coil Units

Compatibility tables



Compatibility Options / Accessories / Models

		STANDARD								LOW BODY-ECM	
		LASER-ECM				CONCEALED-ECM					
Code	Designation	YLV	YLH	YLV-AF	YLH-AF	YLIV	YLIH	YLIV-AF	YLIH-AF	YLV-R	YLIV-R
Coils and heaters**											
BA1**	Additional 1 row heating	•	•	•	•	•	•	•	•	•	•
KREL**	Kit electrical heater with safety thermostat and relay	•	•	•	•	•	•	•	•		
Factory fitted thermostat (built in)											
EDCL	Microprocessor control for ECM units	•		•		•		•		•	•
OBV11-ODC711	Omnibus control for ECM units + Analogue Plus console	•		•		•		•		•	•
OBV11-ODC211	Omnibus control for ECM units + Display console	•		•		•		•		•	•
Remote controllers and thermostats (wall mounted)											
EDCR	Microprocessor control for ECM units, for wall installation	•	•	•	•	•	•	•	•	•	•
OBV10+ODC716	Omnibus control for ECM units + Remote Analogue Plus console	•	•	•	•	•	•	•	•	•	•
OBV10+ODC216	Omnibus control for ECM units + Remote Display console	•	•	•	•	•	•	•	•	•	•
Valves / Condensate pump / Water sensor / Minimum temperature thermostat (Factory fitted)											
J3A2 (2p)	3-way 4-ports on/off valves for 2-pipe systems	•	•	•	•	•	•	•	•	•	•
J3A2 (4p)	3-way 4-ports on/off valves for 4-pipe systems	•	•	•	•	•	•	•	•	•	•
J3AM (2p)	3-way 4-ports modulating valves for 2-pipe systems	•	•	•	•	•	•	•	•	•	•
J3AM (4p)	3-way 4-ports modulating valves for 4-pipe systems	•	•	•	•	•	•	•	•	•	•
DT (2p)	Shut-off valves for 2-pipe systems (in addition to J3A2/J3AM valves)	•	•	•	•	•	•	•	•	•	•
DT (4p)	Shut-off valves for 4-pipe systems (in addition to J3A2/J3AM valves)	•	•	•	•	•	•	•	•	•	•
PC	Condensate pump	•	•	•	•	•	•	•	•	•	•
WS	Water sensor	Compatible with all the above listed controllers									
Feet and panels											
CP1	Set of painted feet	•				•					
ZL1	Set of feet + frontal socle	•									
PPV1	Vertical painted back panel	•		•						•	
PPH1	Horizontal painted back panel		•		•						
External air intake											
PA	Air intake plenum						•				
PAS	Air intake plenum collars						•				
PA90	90° air intake plenum						•				
RCA	Air intake duct fitting						•				
PM	Air delivery plenum with collars					•	•	•	•		•
PM90	90° air delivery plenum					•	•	•	•		•

• Compatible

Compatible with conditions

Not compatible

** Maximum of rows is indicated in the documentation, the maximum number of rows includes the heating row or electrical heater.

YHP-L / YHP-L-ECM High Static Pressure Blower

YHP-L / YHP-L-ECM 130-740 · 2 & 4 pipe system

A complete range from 2.1 kW to 12.3 kW



ECM Inverter version
also available!



Wired controls



WM-3V

Remote three speeds controller

JWC-T

WC-3V + Electronic thermostat and Summer/Winter switch

JWC-AU

Automatic JWC-T



T-MB

Digital Automatic Remote controller

WM-503-AC-EC

Digital Automatic Remote controller to be mounted in the standard light wall box

YHP-L and YHP-L ECM offers a complete range able to satisfy all air conditioning need in working environments such as offices, shops, restaurants and hotel rooms, for ducted installations up to 80 Pa External Static Pressure.

These new ranges replace our earlier YHP-L series, offering lower noise levels, a strengthened structure and wider operating envelope.

The YHP-L series comes in 7 sizes from 340 to 1810 m³/h with option of 3 or 4 row cooling coils, offering up to 10.5 kW of cooling, with facility to add 1 or 2 row heating coil and offer a 4 pipe system.

ECM version comes in 4 sizes and covers the airflow capacity of 330 to 2460 m³/h and up to 12.3 kW of cooling.



TUC03+ Terminal unit controller

BacNET and N2 Metasys network compatible



Features

- 7 sizes
- From 3000 to 10500 w cooling
- Horizontal or vertical version
- Low noise operation
- 5 speed fan
- A wide range of thermostats and accessories
- Available with left or right connections

Optionally the main valve, auxiliary valve (4 tubes), controller and wiring can be assembled from factory, for an easy installation in a centralized management system.



Selection software

YHP-L High Static Pressure Blower

2.1 kW to 10.5 kW



Technical features

Model			130	140	230	240	330	340	430	440	530	540	630	640	730	740
Total cooling capacity [kW]	(1)	max	2.93	3.37	4.47	5.45	6.00	6.95	6.74	7.42	7.24	8.01	8.56	9.55	9.22	10.42
		med	2.81	3.21	4.29	5.18	5.54	6.34	6.00	6.53	6.11	6.65	7.97	8.80	7.90	8.88
		min	2.14	2.39	3.16	3.69	3.36	3.71	4.12	4.41	3.98	4.24	4.77	5.10	5.87	6.45
Sensible cooling capacity [kW]	(1)	max	2.24	2.50	3.49	3.99	4.72	5.14	5.43	5.77	5.53	6.02	6.67	7.18	7.09	7.74
		med	2.09	2.33	3.23	3.69	4.19	4.54	4.58	4.85	4.42	4.76	5.99	6.42	6.08	6.60
		min	1.57	1.71	2.33	2.59	2.44	2.59	3.04	3.18	2.82	2.98	3.44	3.60	4.30	4.61
Water flow in cooling [l/h]	(1)	max	504	579	768	938	1033	1195	1160	1276	1246	1378	1473	1642	1586	1793
		med	484	551	738	890	952	1091	1033	1123	1050	1144	1370	1514	1359	1527
		min	369	410	543	635	578	638	709	758	684	730	821	878	1010	1109
Pressure drop in cooling [kPa]	(1)	max	38.5	23.0	28.8	48.3	27.1	57.4	33.7	23.2	50.6	28.5	26.1	22.4	28.8	25.4
		med	34.6	20.5	25.7	42.4	22.6	47.1	26.1	17.7	35.7	19.7	22.1	18.7	22.9	19.9
		min	21.7	12.3	15.3	23.8	9.4	18.4	13.8	9.0	17.0	9.0	9.0	7.2	13.4	11.2
Heating capacity 2 pipes [kW]	(2)	max	3.31	3.60	5.18	5.76	6.99	7.32	8.11	8.57	8.38	8.84	9.50	10.62	10.29	11.58
		med	3.08	3.33	4.78	5.29	6.16	6.43	6.80	7.12	6.59	6.90	8.49	9.42	8.80	9.80
		min	2.25	2.39	3.37	3.63	3.48	3.57	4.43	4.57	4.08	4.21	4.77	5.10	6.18	6.70
Water flow in heating 2 pipes [l/h] *	(2)	max	285	310	445	495	601	629	698	737	721	761	817	914	885	996
		med	265	286	411	455	530	553	585	613	567	593	730	810	757	843
		min	194	206	290	312	299	307	381	393	351	362	410	439	531	576
Pressure drop in heating 2 pipes [kPa]	(2)	max	40.3	24.8	29.4	43.6	28.0	49.7	36.6	23.5	51.4	28.8	24.7	23.1	28.6	27.0
		med	35.4	21.5	25.4	37.4	22.3	39.4	26.7	16.8	33.4	18.4	20.2	18.6	21.6	20.0
		min	20.2	11.9	13.6	19.0	8.0	13.7	12.3	7.6	14.1	7.6	7.2	6.2	11.4	10.1
Heating capacity 4 pipes [kW]	(3)	max	2.50	2.50	3.70	3.70	4.87	4.87	5.48	5.48	5.79	5.79	6.93	6.93	7.40	7.40
		med	2.36	2.36	3.48	3.48	4.44	4.44	4.78	4.78	4.81	4.81	6.35	6.35	6.53	6.53
		min	1.85	1.85	2.65	2.65	2.88	2.88	3.45	3.45	3.34	3.34	4.05	4.05	4.94	4.94
Water flow in heating 4 pipes [l/h] *	(3)	max	215	215	318	318	419	419	471	471	498	498	596	596	637	637
		med	203	203	299	299	382	382	411	411	413	413	547	547	562	562
		min	159	159	228	228	248	248	297	297	287	287	348	348	425	425
Pressure drop in heating 4 pipes [kPa]	(3)	max	14.1	14.1	6.9	6.9	11.2	11.2	13.8	13.8	13.7	13.7	21.1	21.1	23.8	23.8
		med	12.8	12.8	6.2	6.2	9.4	9.4	10.8	10.8	9.8	9.8	18.1	18.1	19.0	19.0
		min	8.3	8.3	3.8	3.8	4.3	4.3	6.0	6.0	5.1	5.1	8.0	8.0	11.5	11.5
Air flow [m3/h]		max	535	535	860	860	1115	1115	1340	1340	1375	1375	1635	1635	1810	1810
		med	490	490	780	785	960	960	1080	1080	1030	1030	1425	1425	1490	1490
		min	340	340	515	515	500	500	655	655	595	595	720	720	970	970
Sound power level [dB(A)]		max	51	51	55	55	57	57	63	63	62	62	61	61	63	63
		med	48	48	52	52	54	54	58	58	56	56	58	58	59	59
		min	40	40	42	42	38	38	45	45	43	43	42	42	48	48
Sound pressure level [dB(A)]	(4)	max	42	42	46	46	48	48	54	54	53	53	52	52	53	53
		med	39	39	43	43	44	44	49	49	47	47	48	48	49	49
		min	31	31	33	33	29	29	36	36	34	34	33	33	39	39
Power supply [V-ph-Hz]		230 / 1 / 50 + E														
Power input [W]		max	60.00	60.00	115.00	115.00	132.00	132.00	185.00	185.00	185.00	185.00	175.00	175.00	260.00	260.00
Absorbed current [A]		max	0.30	0.30	0.50	0.50	0.60	0.60	0.90	0.90	0.90	0.90	0.80	0.80	1.20	1.20
Dimensions	Height	mm	511	511	511	511	511	511	511	511	511	511	511	511	511	511
	Width	mm	689	689	904	904	1119	1119	1119	1119	1334	1134	1549	1549	1549	1549
	Depth	mm	248	248	248	248	248	248	248	248	248	248	248	248	248	248

Referred data at maximum speed fan and 0 Pa available static pressure.

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C.

(2) Room temperature 20°C - Water temperature 45/40 °C.

(3) Room temperature 20°C - Water temperature 65/55 °C.

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

* Water flow values as Cooling, according to the EUROVENT standards and UNI ENV 1397.




Manufacturer reserves the rights to change specifications without prior notice.

YHP-L-ECM

Inverter High Static Pressure Blower

2.1 kW to 12.3 kW



ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.

Technical features

Model			130	140	230	240	430	440	730	740
Total cooling capacity [kW]	(1)	max 10V	3.34	3.85	5.44	6.87	6.82	7.52	10.91	12.32
		med 5V	3.04	3.48	4.46	5.48	5.75	6.27	8.43	9.36
		min 1V	2.11	2.33	3.27	3.87	3.95	4.21	5.58	6.03
Sensible cooling capacity [kW]	(1)	max 10V	2.62	2.93	4.48	5.25	5.54	5.90	9.00	9.83
		med 5V	2.34	2.60	3.51	4.04	4.51	4.77	6.57	7.10
		min 1V	1.54	1.67	2.44	2.75	2.92	3.05	4.09	4.34
Water flow in cooling [l/h]	(1)	max 10V	574	663	936	1181	1174	1294	1877	2118
		med 5V	523	598	766	942	990	1078	1449	1609
		min 1V	363	400	563	665	679	724	960	1038
Pressure drop in cooling [kPa]	(1)	max 10V	48.4	29.2	41.1	73.1	34.1	23.5	40.8	35.7
		med 5V	40.7	24.1	28.1	47.8	24.6	16.7	25.0	21.3
		min 1V	20.8	11.6	15.9	25.4	12.4	8.1	11.8	9.6
Heating capacity 2 pipes [kW]	(2)	max 10V	3.88	4.27	6.87	7.82	8.35	8.83	12.69	14.91
		med 5V	3.44	3.75	5.27	5.88	6.66	6.99	9.14	10.45
		min 1V	2.19	2.33	3.56	3.86	4.19	4.32	5.57	6.14
Water flow in heating 2 pipes [l/h] *	(2)	max 10V	334	367	591	673	718	759	1092	1283
		med 5V	296	322	453	505	573	601	786	899
		min 1V	189	200	307	332	360	371	479	528
Pressure drop in heating 2 pipes [kPa]	(2)	max 10V	53.7	33.7	48.9	75.6	38.5	24.8	41.7	42.6
		med 5V	43.1	26.7	30.3	45.2	25.7	16.3	23.1	22.5
		min 1V	19.2	11.3	15.0	21.2	11.1	6.8	9.5	8.6
Heating capacity 4 pipes [kW]	(3)	max 10V	2.82	2.82	4.64	4.64	5.35	5.35	8.97	8.97
		med 5V	2.57	2.57	3.75	3.75	4.49	4.49	6.85	6.85
		min 1V	1.82	1.82	2.78	2.78	3.16	3.16	4.64	4.64
Water flow in heating 4 pipes [l/h] *	(3)	max 10V	243	243	399	399	460	460	772	772
		med 5V	221	221	322	322	386	386	589	589
		min 1V	156	156	239	239	272	272	399	399
Pressure drop in heating 4 pipes [kPa]	(3)	max 10V	17.6	17.6	10.4	10.4	13.2	13.2	33.6	33.6
		med 5V	14.9	14.9	7.1	7.1	9.6	9.6	20.7	20.7
		min 1V	8.0	8.0	4.1	4.1	5.1	5.1	10.2	10.2
Air flow [m3/h]		max 10V	650	650	1235	1235	1390	1390	2460	2460
		med 5V	560	560	880	880	1055	1055	1605	1605
		min 1V	330	330	550	550	615	615	880	880
Sound power level [dB(A)]		max 10V	58	58	64	64	64	64	70	70
		med 5V	54	54	55	55	57	57	61	61
		min 1V	41	41	44	44	44	44	48	48
Sound pressure level [dB(A)]	(4)	max 10V	49	49	55	55	55	55	61	61
		med 5V	45	45	46	46	48	48	52	52
		min 1V	32	32	35	35	35	35	39	39
Power supply [V-ph-Hz]		230 / 1 / 50 + E								
Power input [W]		max	52	52	134	134	131	131	303	303
Absorbed current [A]		max	0.4	0.4	1.1	1.1	1.1	1.1	1.4	1.4
Dimensions	Height	mm	511	511	511	511	511	511	511	511
	Width	mm	689	689	904	904	1119	1119	1549	1549
	Depth	mm	248	248	248	248	248	248	248	248

Referred data at maximum speed fan and 0 Pa available static pressure.

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C.

(2) Room temperature 20°C - Water temperature 45/40 °C.

(3) Room temperature 20°C - Water temperature 65/55 °C.

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.


* Water flow values as Cooling, accordingly to the EUROVENT standards and UNI ENV 1397.



Manufacturer reserves the rights to change specifications without prior notice.

YHP-L and YHP-L-ECM High Static Pressure Blower

Compatibility tables



Compatibility table / Codes

Model YHP-L	130-140	230-240	330-340	430-440	530-540	630-640	730-740
Model YHP-L-ECM	130-140	230-240	-	430-440	-	-	730-740

Accessories (factory fitted)

Valves (220V On/Off)			
3 way valve for main coil VBPM-C G1-5 220V (factory fitted)	9066561	-	
3 way valve for main coil VBPM-C G6-9 220V (factory fitted)	-	9060471	-
3 way valve for main coil VBPM-C G8S 220V (factory fitted)	-		9069208
3 way valve for additional coil VBAM-C G1-9 220V (factory fitted)		9060472	
2 way valve for additional coil V2M-C G1-5 220V (factory fitted)	9060476	-	
2 way valve V2M-C G6-9 220V (factory fitted)	-	9060477	-
2 way valve V2M-C G8S 220V (factory fitted)		-	9069209
Simplified 3-way valve kit for additional coil VSPM-C G1-5 220 V (fitted)	9066571	-	
Simplified 3-way valve kit VSPM-C G6-9 220 V (factory fitted)	-	9060484	-
Simplified 3-way valve kit VSPM-C G8-S 220 V (factory fitted)		-	9069211

Accessories (supplied loose)

Valves (220V On/Off)			
3 way valve for main coil VBPS-C G1-5 220V (not fitted)	9066560	-	
3 way valve for main coil VBPS-C G6-9 220V (not fitted)	-	9060474	-
3 way valve for main coil VBPS-C G8S 220V (not fitted)	-		9069206
3 way valve for additional coil VBAS-C G1-9 220V (not fitted)	9060475		
2 way valve for additional coil V2S-C G1-5 220V (not fitted)	9060478	-	
2 way valve V2S-C G6-9 220V (not fitted)	-	9060479	-
2 way valve V2S-C G8S 220V (not fitted)	-		9069207
Simplified 3-way valve kit for additional coil VSPS-C G1-5 220 V (not fitted)	9066570	-	
Simplified 3-way valve kit VSPS-C G6-9 220 V (not fitted)	-	9060481	-
Simplified 3-way valve kit VSPS-C G8-S 220 V (not fitted)	-		9069210
Other type of valves	Contact Johnson Controls		

YHP-L and YHP-L-ECM

High Static Pressure Blower

Compatibility tables



Compatibility table / Codes


Model YHP-L	130-140	230-240	330-340	430-440	530-540	630-640	730-740
Model YHP-L-ECM	130-140	230-240	-	430-440	-	-	730-740

Accessories (supplied loose)

Air inlet plenum PMC	9069191	9069222	9066368	9069195	9069196
Straight inlet flange	9069371	9038002	9060724	9069375	9079376
Inlet flange 90°	9069381	9038001	9060714	9069385	9069386
Intake grid 90°	9060761	9060762	9060763	9068155	9038041
Straight outlet flange	9069391	9069232	9066378	9069395	9069396
Outlet flange 90°	9069400	9069242	9066388	9069405	9069406
Outlet grid	9060751	9060752	9060753	9069415	9038040
El. resistance and relays fitted on the unit (1500 W) BEL-I G3-4/15	9066613	-			
El. resistance and relays fitted on the unit (900 W) BEL-I G3-4/09	9066603	-			
El. resistance and relays fitted on the unit (600 W) BEL-I G3-4/06	9066593	-			
El. resistance and relays fitted on the unit (2000 W) BEL-I G5-6/20	-	9066615	-		
El. resistance and relays fitted on the unit (1250 W) BEL-I G5-6/12	-	9066605	-		
El. resistance and relays fitted on the unit (750 W) BEL-I G5-6/07	-	9066595	-		
El. resistance and relays fitted on the unit (2500 W) BEL-I G7-9/25	-		9066617	-	
El. resistance and relays fitted on the unit (1500 W) BEL-I G7-9/15	-		9066607	-	
El. resistance and relays fitted on the unit (1000 W) BEL-I G7-9/10	-		9066597	-	
El. resistance and relays fitted on the unit (2750 W) BEL-I SL5/27		-		9038037	-
El. resistance and relays fitted on the unit (1650 W) BEL-I SL5/16		-		9038038	-
El. resistance and relays fitted on the unit (1100 W) BEL-I SL5/11		-		9038039	-
El. resistance and relays fitted on the unit (3500 W) BEL-I SL6-7/35		-			9038047
El. resistance and relays fitted on the unit (2500 W) BEL-I SL6-7/25		-			9038048
El. resistance and relays fitted on the unit (1000 W) BEL-I SL6-7/10		-			9038049
NC auxiliary condensate tray ACT-NC			6066039		
Mounted condensate pump DRCV - vertical units (auxiliary condensate tray included)			9066297		
Not mounted condensate pump DRCV - vertical units (auxiliary condensate tray included)			9066296		
Not mounted condensate pump DRPI-C - only horizontal installation (auxiliary condensate tray included)			9066180		
Condensate drain pipe SCR			6060420		
Front air intake KAF	9069361	9069072	9069073	9069365	9069366

YHP-L and YHP-L-ECM High Static Pressure Blower

Compatibility tables



Compatibility table / Codes

Controls for YHP-L models	130-140	230-240	330-340	430-440	530-540	630-640	730-740
Remote three speed control WM-3V (1) (4)				9066642			
Remote three speed control + electronic thermostat and manual S/W switch JWC-T (2)				9066630K			
Remote three speed control + electronic thermostat and centralized/manual S/W switch JWC-TQR (2) (3)				9066631K			
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)				9066632K			
Automatic remote control with electronic thermostat, S/W switch and liquid crystal display T-MB (2) (3)				9066331E			
Automatic speed control with electronic thermostat to be mounted in the light wall box WM-503-AC-EC (to be used with UP-503-AC-EC only)				9066686			
Electromechanical thermostat T2T (4) (5)				9060174			
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit				9066641			
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit				9066640			
Power unit UP-503-AC-EC for WM-503-AC-EC remote control only, not fitted on the unit				9066687			
Control accessories for all versions (supplied with separate packaging)							
Low temperature cut-out for controls WM-3V and JWC-T				9053048			
Low temperature cut-out for controls JWC-TQR, WM-503-AC-EC and UP-AU power unit				3021090			
T2 sensor to be used as Change-over for UP-AU power unit				9025310			
Change-over 15-25 for control JWC-TQR				9053049			
Receiver board for control JWC-T and JWC-TQR				9066311			
Controls for YHP-L-ECM models	130-140	230-240	-	430-440	-	-	730-740
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)				9066632K			
Automatic remote control with electronic thermostat, S/W switch and liquid crystal display T-MB (to be used with UPM-AU and UP-AU only) (2) (3)				9066331E			
WM-S-ECM Continuous fan speed control with electronic thermostat, summer/winter switch and LCD display				9066644			
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit				9066641			
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit				9066640			

(1) Not to be used with valves. (2) Can be used with valves and/or low temperature cut-out.

(3) Can be used with Change Over. (4) Not suitable with -E electric heater. (5) Can be used with valve and not to be used with low temperature cut-out.


RFHP-O / RFHPO-ECM High static pressure blower with centrifugal fan

RFHP-O / RFHPO-ECM 14 - 74+2 · 2 & 4 pipe system

A complete range from 4.0 kW to 30.6 kW



ECM Inverter version
also available!

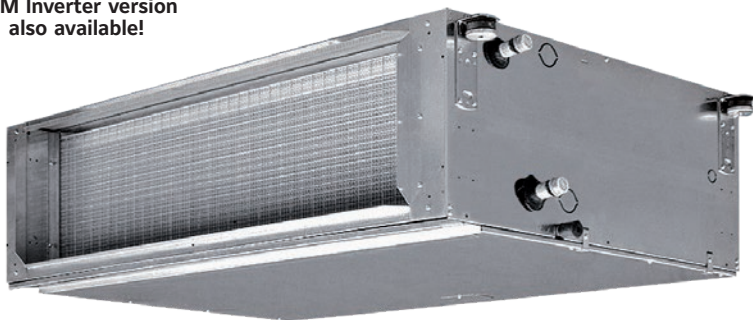

Wired controls



WM-3V
Remote three speeds controller

JWC-T
WC-3V + Electronic thermostat and Summer/Winter switch

JWC-AU
Automatic JWC-T



T-MB
Digital Automatic Remote controller

WM-503-AC-EC
Digital Automatic Remote controller to be mounted in the standard light wall box



TUC03+ Terminal unit controller
BacNET and N2 Metasys network compatible



RFHP-O and RFHPO-ECM ranges are designed and built for concealed installations. With small dimensions, they are very silent and offers elevated air flow rates and up to 250 Pa External Static Pressure.

They are suitable for climate control for small and medium commercial and sports environments or for large civil environments and integrate perfectly in regular false ceilings.

The RFHP-O range is available with the combination of either 3 or 4 row coils (sizes 1÷5) with the possibility to add a 1 or 2 row coil (3+1, 4+1, 3+2, 4+2 versions for 4 pipe systems), and 4 or 6 row coils (sizes 6-7) with the possibility to add a 2 row coil (4+2, 6+2 versions for 4 pipe systems).

ECM version comes in 5 sizes and its ability to continuously vary the air flow gives great regulation and control flexibility, at the same time ensuring excellent environmental conditions and extremely low electrical consumption.

Features

- 7 sizes
- From 4040 to 30630 w cooling
- Concealed version
- Low noise operation
- 5 speed fan
- A wide range of thermostats and accessories
- Available with left or right connections

Optionally the main valve, auxiliary valve (4 tubes), controller and wiring can be assembled from factory, for an easy installation in a centralized management system.



Selection software

RFHP-O High static pressure blower

4.1 kW to 30.6 kW



Technical features

Model RFHP-O 2 pipes (4 row coil)			14	24	34	44	54 (*)	64 (*)	74 (*)
Total cooling capacity [kW]	(1)	max 5v	5.92	8.15	10.71	13.60	17.76	22.89	30.63
		med 3v	5.21	7.01	9.76	12.40	16.19	18.73	25.33
		min 1v	4.17	4.99	8.71	10.90	14.54	12.42	21.54
Sensible cooling capacity [kW]	(1)	max	5.03	6.62	8.65	10.90	14.37	17.98	24.53
		med	4.26	5.48	7.68	9.70	12.80	14.16	19.46
		min	3.25	3.66	6.67	8.25	11.21	8.88	16.05
Pressure drop in cooling [kPa]	(1)	max	9.6	16.8	23.4	20.9	19.4	22.6	27.6
		med	7.6	12.7	19.8	17.7	16.3	15.3	19.3
		min	5.1	6.9	16.0	13.9	13.3	7.4	14.4
Heating capacity [kW]	(2)	max	7.67	1.10	13.19	16.53	22.93	43.60	61.14
		med	6.44	8.27	11.75	14.92	20.32	33.52	47.85
		min	4.98	5.57	10.20	12.79	17.67	20.86	39.34
Pressure drop in heating [kPa]	(2)	max	11.3	18.3	24.8	21.3	22.8	14.7	18.8
		med	8.2	17.0	23.0	17.7	18.3	9.1	12.1
		min	5.2	6.2	15.6	13.4	14.2	3.9	8.5
Air flow [m³/h]		max	1410	1825	2440	3020	3850	4800	7100
		med	1125	1410	2075	2580	3280	3385	5070
		min	790	840	1710	2070	2740	1880	3925
Fan [W]		max	191	285	470	570	760	1304	2460
		med	154	230	420	490	617	778	1758
		min	115	170	350	390	500	574	1518

Model RFHP-O 4 pipes (with additional coil)			14+1	24+1	34+1	44+1	54+1 (*)	64+2 (*)	74+2 (*)
Total cooling capacity [kW]	(1)	max 5v	5.79	8.03	10.58	13.46	16.73	22.52	30.36
		med 3v	5.11	6.95	9.67	12.34	15.31	18.56	25.25
		min 1v	4.09	4.99	8.61	10.85	13.75	12.33	21.53
Sensible cooling capacity [kW]	(1)	max	4.87	6.49	8.51	10.72	13.56	17.62	24.28
		med	4.16	5.42	7.60	9.61	12.13	14.02	19.39
		min	3.18	3.66	6.58	8.21	10.62	8.81	16.05
Pressure drop in cooling [kPa]	(1)	max	9.20	16.30	22.90	20.50	17.40	22.00	27.10
		med	7.30	12.50	19.40	17.40	14.70	15.00	19.10
		min	4.90	6.90	15.70	13.80	12.00	7.30	14.40
Heating capacity [kW]	(3)	max	5.47	7.16	9.20	12.00	15.28	37.13	51.31
		med	4.87	6.28	8.47	11.07	14.00	29.78	41.88
		min	3.96	4.63	7.62	9.83	12.67	19.81	35.50
Pressure drop in heating [kPa]	(3)	max	21.0	31.9	22.3	39.5	36.3	37.0	46.1
		med	17.0	25.2	19.3	34.1	31.1	24.9	32.0
		min	11.7	14.5	15.9	27.6	26.0	11.9	23.8
Air flow [m³/h]		max	1350	1775	2390	2960	3800	4680	6980
		med	1090	1390	2045	2545	3245	3330	5040
		min	770	840	1680	2055	2700	1860	3920
Fan [W]		max	191	285	470	570	760	1327	2376
		med	154	230	420	490	617	750	1727
		min	115	170	350	390	500	565	1499
Sound power level [dB(A)]		max	58	61	65	66	70	77	81
		med	52	56	62	63	67	71	75
		min	44	44	57	59	63	63	71
Sound pressure level [dB(A)]	(4)	max	49	52	56	57	61	68	72
		med	43	47	53	54	58	62	66
		min	35	35	48	50	54	54	62
Available pressure [Pa]		max	75	80	70	70	70	150	150
		med	50	50	50	50	50	150	150
		min	25	15	30	35	35	150	150
Power supply [V-ph-Hz]			230 / 1 / 50 + E						
Dimensions	Height	mm	310	310	360	360	435	488	588
	Width	mm	1133	1133	1133	1445	1445	1535	1535
	Depth	mm	698	698	698	853	853	1100	1100

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C.

(2) Room temperature 20°C - Water temperature 45/40 °C.

(3) Room temperature 20°C - Water temperature 65/55 °C.

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.


* Models not covered by EUROVENT certification program.



Manufacturer reserves the rights to change specifications without prior notice.

RFHPO-ECM Inverter high static pressure blower

4.0 kW to 18.17 kW



ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.

Technical features

Model RFHPO-ECM 2 pipes (4 row coil)			14	24	34	44	54
Total cooling capacity [kW]	(1)	max	5,61	7,94	10,81	13,99	18,17
		med	5,11	6,86	9,70	12,39	16,70
		min	4,14	5,44	7,87	10,47	13,73
Sensible cooling capacity [kW]	(1)	max	4,72	6,44	8,72	11,23	14,75
		med	4,18	5,36	7,61	9,65	13,26
		min	3,24	4,08	5,93	7,90	10,46
Pressure drop in cooling [kPa]	(1)	max	8,7	15,8	21,6	21,7	21,4
		med	7,2	11,8	17,4	16,9	17,9
		min	4,9	7,7	11,7	12,2	12,3
Heating capacity [kW]	(2)	max	7,76	10,62	13,06	18,08	23,25
		med	6,80	8,64	11,25	15,15	20,51
		min	5,18	6,42	8,64	12,13	15,90
Pressure drop in heating [kPa]	(2)	max	11,1	18,8	21,4	23,9	25,4
		med	8,7	12,9	16,4	17,4	20,3
		min	5,3	7,5	10,1	11,6	12,8
Air flow [m³/h]		max	1310	1780	2390	3080	3920
		med	1100	1360	1950	2440	3320
		min	780	940	1380	1840	2400
Fan [W]		max	144	225	340	530	702
		med	88	110	195	253	383
		min	40	44	80	110	166

Model RFHPO-ECM 4 pipes (with additional coil)			14+1	24+1	34+1	44+1	54+1
Total cooling capacity [kW]	(1)	max	5,46	7,87	10,70	13,90	18,00
		med	4,94	6,79	9,59	12,27	16,62
		min	4,04	5,36	7,76	10,36	13,66
Sensible cooling capacity [kW]	(1)	max	4,55	6,35	8,61	11,13	14,58
		med	4,01	5,30	7,51	9,53	13,19
		min	3,14	4,01	5,83	7,79	10,39
Pressure drop in cooling [kPa]	(1)	max	8,3	15,5	21,2	21,4	19,4
		med	6,8	11,6	17,1	16,6	16,3
		min	4,6	7,5	11,4	12,0	11,2
Heating capacity [kW]	(3)	max	4,62	6,25	8,02	10,75	13,77
		med	4,18	5,42	7,20	9,48	12,67
		min	3,43	4,33	5,90	8,06	10,53
Pressure drop in heating [kPa]	(3)	max	16,0	26,4	17,3	33,0	29,9
		med	13,4	20,4	14,3	26,3	25,7
		min	9,4	13,6	9,9	19,6	18,5
Air flow [m³/h]		max	1250	1750	2350	3040	3860
		med	1040	1340	1920	2400	3300
		min	750	920	1350	1810	2380
Fan [W]		max	144	225	340	530	695
		med	88	115	200	253	384
		min	40	44	80	110	168
Sound power level [dB(A)]		max	59	61	64	67	71
		med	52	55	60	62	67
		min	45	45	52	55	58
Sound pressure level [dB(A)]	(4)	max	50	52	55	58	62
		med	43	46	51	53	58
		min	36	36	43	46	49
Available pressure [Pa]		max	72	85	75	80	68
		med	50	50	50	50	50
		min	26	24	25	28	26
Power supply [V-ph-Hz]			230 / 1 / 50 + E				
Dimensions	Height	mm	310	310	360	360	435
	Width	mm	1133	1133	1133	1445	1445
	Depth	mm	698	698	698	853	853

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C.

(2) Room temperature 20°C - Water temperature 45/40 °C.

(3) Room temperature 20°C - Water temperature 65/55 °C.

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



Manufacturer reserves the rights to change specifications without prior notice.

RFHP-O and RFHPO-ECM

High static pressure blower with centrifugal fan

Compatibility tables



Compatibility table / Codes

Controls for RFHP-O models	14	24	34	44	54	64	74
Remote three speed control WM-3V (1) (4)				9066642			
Remote three speed control + electronic thermostat and manual S/W switch JWC-T (2)				9066630K			
Remote three speed control + electronic thermostat and centralized/manual S/W switch JWC-TQR (2) (3)				9066631K			
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)				9066632K			
Automatic remote control with electronic thermostat, S/W switch and liquid crystall display T-MB (2) (3)				9066331E			
Receiving board for centralized control SEL-S				9079109			
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit				9066641			
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit				9066640			
Electronic controls for MB boards							
Mounted power unit MB-M (T-MB wall control included)				9066332			
Not mounted power unit MB-S (T-MB wall control included)				9066333			
Multifunction wall control up to 60 units PSM-DI				3021293			
Change-over 15-25 for control JWC-TQR				9053049			
Receiver board for control JWC-T and JWC-TQR				9066311			
Management system for a network of fan coils with MB electronic board							
Hardware/software supervisory system (to be used with MB board only) NET				9079118			
Router-S for NET (default) or for BMS systems no provided by YORK				3021290			
Relay output board SIOS				3021292			
Controls for RFHPO-ECM models	14	24	34	44	54	-	-
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)				9066632K			
Automatic remote control with electronic thermostat, S/W switch and liquid crystall display T-MB (to be used with UPM-AU and UP-AU only) (2) (3)				9066331E			
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit				9066641			
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit				9066640			
Electronic controls for MB boards							
Mounted power unit MB-M (T-MB wall control included)				9066332			
Not mounted power unit MB-S (T-MB wall control included)				9066333			
Multifunction wall control up to 60 units PSM-DI				3021293			
Change-over 15-25 for control JWC-TQR				9053049			
Receiver board for control JWC-T and JWC-TQR				9066311			
Management system for a network of fan coils with MB electronic board							
Hardware/software supervisory system (to be used with MB board only) NET				9079118			
Router-S for NET (default) or for BMS systems no provided by YORK				3021290			
Relay output board SIOS				3021292			

(1) Not to be used with valves. (2) Can be used with valves and/or low temperature cut-out.

(3) Can be used with Change Over. (4) Not suitable with -E electric heater. (5) Can be used with valve and not to be used with low temperature cut-out.

Model RFHP-O	14	24	34	44	54	64	74
Model RFHPO-ECM	14	24	34	44	54	-	-

Accessories (supplied loose)

Main and auxiliary coil valve kit (220V On/Off)							
Main and auxiliary coil 3 way valve kit 24V actuator							
External auxiliary condensate collection tray							
Electric coil							
Intake/supply spigot plenum	9034200	9034200	9034220	9034230	9034240	9034280	9034290
ePM10 50% - G4 class synthetic filter							
ePM10 70% - F6 class Synthetic Filter			-				
Antivibrating connection							

YEFB High static pressure blower

2 & 4 pipe system

A complete range from 4.3 kW up to 27.5 kW



CSR00 (Wall mounted)
Fan speed selector



CMR00 (Wall mounted)
Thermostat with manual fan speed and S/W change over



CER00 (Wall mounted)
Thermostat with manual fan speed and automatic change over

CER20 (Wall mounted)
Thermostat with auto. fan speed and automatic change over

CER30 (Wall mounted)
Thermostat with auto. fan speed and automatic change over for modulating valve



TUC03+ Terminal unit controller
BacNET and N2 Metasys network compatible



YEFB Blower units are available in 6 sizes for horizontal concealed installations: thanks to their high ESP fans that can handle up to 250Pa, they are the ideal solution for air conditioning large spaces.

Features

- 6 unit sizes for horizontal mounting
- Handles high external static pressure up to 250Pa
- Choice of 2 or 4 pipe systems
- Twin centrifugal fans
- Horizontal air return
- Air distribution plenum
- Electric heater option
- Optional paint finish
- F5 grade filter option
- 5 Row cooling coil option on sizes 060, 070
- EUROVENT Certified



Selection software

YEFB High static pressure blower

4.3 kW to 27.5 kW



Unit performance at different Pa external static pressure, with 4 row cooling coil

Model YEFB		020-4	030-4	040-4	050-4	060-4*	070-4*
Total cooling capacity [kW]	(1)	max	6.95	9.49	11.77	13.72	23.83
		med	5.90	8.23	10.35	12.6	21.59
		min	4.30	7.11	8.91	11.36	23.56
Sensible cooling capacity [kW]	(1)	max	4.99	7.91	9.94	11.80	18.89
		med	4.14	6.7	8.61	10.60	16.84
		min	2.98	5.68	7.17	9.44	12.93
Water flow in cooling [l/h]	(1)	max	1195	1632	2024	2360	4099
		med	1015	1416	1780	2167	3714
		min	740	1223	1533	1954	2950
Pressure drop in cooling [kPa]	(1)	max	17.4	31.5	30.6	40.4	28.0
		med	12.2	24.1	23.3	33.8	23.2
		min	6.5	18.4	17.9	28.3	15.1
Heating capacity 2 pipes [kW]	(2)	max	7.08	11.40	14.32	17.4	28.08
		med	6.20	9.62	12.19	15.53	24.95
		min	4.55	8.20	10.4	13.85	18.9
Water flow in heating 2 pipes [l/h]	(2)	max	1219	1962	2465	2727	4495
		med	1067	1656	2098	2673	4034
		min	783	1411	1788	2392	3047
Pressure drop in heating 2 pipes [kPa]	(2)	max	13.3	34.0	36.1	51.0	30.2
		med	10.3	25.7	26.9	41.3	23.5
		min	4.8	19.2	20.0	33.4	14.6
Air flow [m³/h]		max	1145	1910	2680	3250	4120
		med	920	1520	2130	2870	3610
		min	620	1205	1655	2470	2580
Sound power level [dB(A)]		max	64.0	65.0	69.0	72.0	77.0
		med	58.0	61.0	63.0	68.0	74.0
		min	48.0	57.0	57.0	65.0	65.1
Sound pressure level [dB(A)]	(3)	max	53.0	54.0	58.0	61.0	66.0
		med	47.0	50.0	52.0	57.0	63.0
		min	37.0	46.0	46.0	54.0	54.0
Power supply [V-ph-Hz]		230 / 1 / 50					
Power input [W]	max	171	352	451	588	1007	1 781
Absorbed current [A]	max	0.74	1.62	2.05	2.83	4.47	7.90
Dimensions	Height	mm	407.6	407.6	407.6	517.6	517.6
	Width	mm	902	902	902	1 160	1 160
	Depth	mm	989.6	989.6	1 239.6	1 239.6	1 634.6

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C

(3) Lp= Total sound pressure level in open field at 1 m from the source

For each unit size there are 2, 3 and 4 row coils available; for 4 pipe systems it is possible to install a 2 or 3 row coil. It is therefore possible to have a combination of maximum 7 rows (4 row cooling + 3 row heating). For models 060 and 070 are also 5 row coils available, which can be combined with additional 2 or 3 row coils.

* Performances are out of scope Eurovent FCP.



Manufacturer reserves the rights to change specifications without prior notice.

YEFB-ECM Inverter high static pressure blower

2 & 4 pipe system

A complete range from 4.2 kW up to 23.8 kW



YEFB-ECM high pressure ducted fan coils with energy saving motors, are specifically designed for ducted installations, with external static pressure up to 300 Pa. Their high pressure fan decks permit to satisfy every request of heating and cooling application in big environments.

The YEFB-ECM high pressure fan coil units are available in 5 sizes for concealed horizontal installation, in 2 and 4 pipe systems. For each unit size there are 2, 3 and 4 row coils available and models 060 are also 5 row coils available, which can be combined with additional 2 or 3 row coils.



EDCR (Wall mounted)

Thermostat with manual or automatic fan speed and automatic change over for modulating valve



TUC03+ Terminal unit controller

BacNET and N2 Metasys network compatible



Features

- 5 unit sizes for horizontal mounting
- Handles high external static pressure up to 300Pa
- Choice of 2 or 4 pipe systems
- Twin centrifugal fans
- Horizontal air return
- Air distribution plenum
- Electric heater option
- Optional paint finish
- F5 grade filter option
- 5 Row cooling coil option on size 060
- EUROVENT Certified



Selection software

YEFB-ECM Inverter high static pressure blower

4.2 kW to 23.8 kW



ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.

Unit performance at different Pa external static pressure, with 4 row cooling coil

Model YEFB		020-4	030-4	040-4	050-4	060-4
Total cooling capacity [kW]	(1)	max	6.75	9.94	13.64	23.82
		med	5.62	8.13	11.22	20.32
		min	4.23	7.11	8.43	18.79
Sensible cooling capacity [kW]	(1)	max	5.27	7.98	11.17	18.76
		med	4.30	6.34	10.82	15.78
		min	3.16	5.47	6.46	14.49
Water flow in cooling [l/h]	(1)	max	1162	1711	2348	4088
		med	812	1399	1931	3488
		min	728	1224	1451	3224
Pressure drop in cooling [kPa]	(1)	max	16.5	35.4	45.0	30.8
		med	11.6	24.0	30.6	23.4
		min	6.8	18.8	17.7	20.5
Heating capacity 2 pipes [kW]	(2)	max	7.07	11.52	16.24	28.00
		med	5.65	9.07	12.87	23.25
		min	4.11	7.81	9.35	21.23
Water flow in heating 2 pipes [l/h]	(2)	max	1217	1983	2795	4866
		med	972	1561	2215	4041
		min	707	1344	1609	3689
Pressure drop in heating 2 pipes [kPa]	(2)	max	15.4	39.1	53.2	32.1
		med	10.4	25.4	34.8	23.2
		min	5.8	19.3	19.3	19.8
Air flow [m³/h]		max	1040	1948	2848	4521 *
		med	796	1471	2160	3599 *
		min	549	1241	1484	2972 *
Sound power level [dB(A)]		max	65	68	71	76 *
		med	58	61	66	77 *
		min	49	57	57	74 *
Sound pressure level [dB(A)]	(3)	max	54	57	60	70 *
		med	47	50	55	66 *
		min	38	46	46	63 *
Power supply [V-ph-Hz]		230 - 1 - 50/60 **				
Power input [W]	max	161	261	405	478	926 *
Absorbed current [A]	max	1.08	1.12	1.85	2.17	4.16 *
Dimensions	Height	mm	407.6	407.6	407.6	517.6
	Width	mm	902	902	902	1 160
	Depth	mm	989.6	989.6	1 239.6	1 634.6

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C

(3) Lp= Total sound pressure level in open field at 1 m from the source

4 pipe system not available with 4R heating coil

* Performances are out of scope Eurovent FCP.

** For a correct selection at 60 Hz of the units, pls use the YORK software for selection.



Manufacturer reserves the rights to change specifications without prior notice.

YEFB Hydro Blower

YEFB-ECM Inverter Hydro Blower

Compatibility tables



Compatibility Options / Accessories / Models


		YEFB / YEFB-ECM					
Code	Designation	020	030	040	050	060	070
Coils and heaters**							
BA2	Additional 2 row heating	•	•	•	•	•	•
BA3	Additional 3 row heating	•	•	•	•	•	•
KREL	Kit electrical heater with safety thermostat and relay	•	•	•	•	•	•
Factory fitted electric box							
CBL10	Transformer 230/24V	•	•	•	•	•	•
CBL20	Parallel connection for ON/OFF valve	•	•	•	•	•	•
CBL30	Parallel connection for modulating valve	•	•	•	•	•	•
Remote controllers and thermostats (wall mounted)							
CSR00	Fan speed selector (wall mounted)	•	•	•	•	•	•
CMR00	Thermostat with manual fan speed and S/W change over	•	•	•	•	•	•
CER00	Thermostat with manual fan speed, dead band, automatic change over	Compatible with electrical heaters					
CER20	Thermostat with automatic fan speed, dead band, automatic change over	Compatible with electrical heaters					
CER30	Thermostat with automatic fan speed, dead band, automatic change over for modulating valves	•	•	•	•	•	•
EDCR	Thermostat with manual or automatic fan speed, dead band, automatic change over for modulating valves - Only for ECM models	Compatible with electrical heaters					
OxT+OC716	Omnibus control + Remote Analogue Plus	Compatible with electrical heaters					
OxT+OC216	Omnibus control + Remote Display console	Compatible with electrical heaters					
Valves (Supplied loose) / Condensate pump / Water sensor (Factory fitted)							
J3B2 (2p)	3-way 4-ports on/off valves for 2-pipe systems	•	•	•	•		
J3B2 (4p)	3-way 4-ports on/off valves for 4-pipe systems	•	•	•	•		
J3C2 (2p)	3-way 4-ports on/off valves for 2-pipe systems					•	•
J3C2 (4p)	3-way 4-ports on/off valves for 4-pipe systems					•	•
J3BM (2p)	3-way 4-ports modulating valves for 2-pipe systems	•	•	•	•		
J3BM (4p)	3-way 4-ports modulating valves for 4-pipe systems	•	•	•	•		
J3CM (2p)	3-way 4-ports modulating valves for 2-pipe systems					•	•
J3CM (4p)	3-way 4-ports modulating valves for 4-pipe systems					•	•
J2B2 (2p)	2-way on/off valves for 2-pipe systems	•	•	•	•		
J2B2 (4p)	2-way on/off valves for 4-pipe systems	•	•	•	•		
J2C2 (2p)	2-way modulating valves for 2-pipe systems					•	•
J2C2 (4p)	2-way modulating valves for 4-pipe systems					•	•
DTB (2p)	Shut-off valves for 2-pipe systems supplied loose in addition to J3B2 and J3BM valves	•	•	•	•		
DTB (4p)	Shut-off valves for 4-pipe systems (in addition to J3B2/J3BM valves)	•	•	•	•		
PC	Condensate pump	•	•	•	•	•	•
AS	Air sensor	•	•	•	•	•	•
WS	Water sensor	Compatible with CEL/CER/EDCR					
Plenums							
PAS	Air intake plenum collars	•	•	•	•	•	•
PM	Air delivery plenum with collars	•	•	•	•	•	•
PM + Grill	Air delivery plenum painted with air outlet grill	•	•	•	•	•	•

• Compatible

Compatible with conditions

Not compatible

Dimensions & Weights

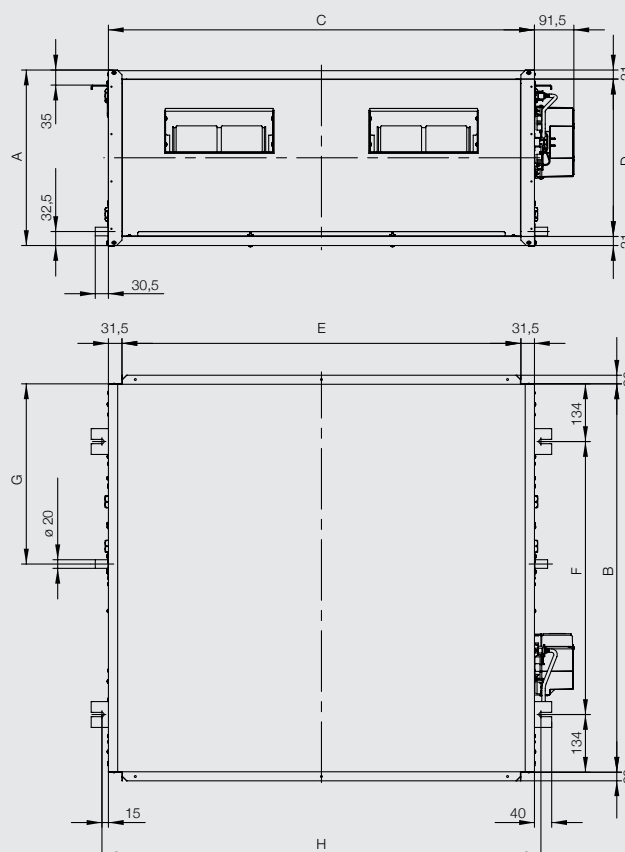

All dimensions in mm. Drawings not in scale.

Model YEFB / YEFB-ECM		020-4	030-4	040-4	050-4	060-4	070-4
A	mm	407.6	407.6	407.6	407.6	517.6	517.6
B	mm	902	902	902	902	1160	1160
C	mm	989.6	989.6	1239.6	1239.6	1634.6	1634.6
D	mm	365.6	365.6	365.6	365.6	475.6	475.6
E	mm	926.6	926.6	1176.6	1176.6	1571.6	1571.6
F	mm	634	634	634	634	892	892
G	mm	418.5	418.5	418.5	418.5	446.5	446.5
H	mm	1019.6	1019.6	1269.6	1269.6	1664.6	1664.6
Weight (3R - 3 rows)	kg	64.3	64.3	79.3	79.3	126.0	126.0

Model YEFB		(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4-5 rows)	(2-3-4-5 rows)
Weight of the coil	kg	4.8 - 5.8 - 7.6	4.8 - 5.8 - 7.6	5.6 - 7.4 - 9.6	5.6 - 7.4 - 9.6	9.4 - 12.8 - 17.4 - 21.5	9.4 - 12.8 - 17.4 - 21.5
Water connection		G1/2" F	G1/2" F	G1/2" F	G1/2" F	G1" M	G1" M
Model YEFB-ECM		(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4-5 rows)	-
Weight of the coil	kg	4.8 - 5.8 - 7.6	4.8 - 5.8 - 7.6	5.6 - 7.4 - 9.6	5.6 - 7.4 - 9.6	9.4 - 12.8 - 17.4 - 21.5	-
Water connection		G1/2" F	G1/2" F	G1/2" F	G1/2" F	G1" M	-

Model YEFB		(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4-5 rows)	(2-3-4-5 rows)
Water content	l	1.4 - 2.2 - 2.9	1.4 - 2.2 - 2.9	1.9 - 2.8 - 3.8	1.9 - 2.8 - 3.8	3.4 - 5.0 - 6.7 - 8.4	3.4 - 5.0 - 6.7 - 8.4
Model YEFB-ECM		(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4 rows)	(2-3-4-5 rows)	-
Water content	l	1.5 - 2.2 - 2.9	1.4 - 2.2 - 2.9	1.9 - 2.8 - 3.8	1.9 - 2.8 - 3.8	3.4 - 5.0 - 6.7 - 8.4	-

YKEY and YKEY900 Hydro Cassette

2 & 4 pipe system

A complete range from 1.1 kW to 10 kW



The YORK YKEY Cassette units are designed for installation on a false ceiling, suitable for cooling and heating applications.

The ambient air drawn through the central air intake grill is blown into the circular heat exchanger, composed by copper pipes and aluminium fins, and then it comes out from the 4 sides of the cassette unit. Thanks to the special combination of air intake/air outlet grilles it is possible to obtain the pleasant COANDA effect.



YKEY/M Special version with micro-drilled metallic grill



YKEY/H-Special version with natural condensate water discharge



Selection software



CSR00 (Wall mounted)
Fan speed selector



CER00 (Wall mounted)
Thermostat with manual fan speed and automatic change over



CMR00 (Wall mounted)
Thermostat with manual fan speed and S/W change over

CER20 (Wall mounted)
Thermostat with auto. fan speed and automatic change over


CER30 (Wall mounted)
Thermostat with auto. fan speed and automatic change over for modulating valve



TUC03+ Terminal unit controller
BacNET and N2 Metasys network compatible

Features

- Cooling duty from 1.4 to 10 kW
- 2 & 4 pipes systems in all range
- Central air intake grill
- 4 sides air outlet plenum
- 2 panel sizes: 600 x 600 & 900 x 900
- Possible choice between 6 fan speeds
- Condensate pump integrated in all range
- 2/3 way valves fitted or supplied loose in all range
- Coloured versions, possible to change the colour of the grill and the frame
- Possible to select a complete range of controls
- Electric heater fitted as an option for 2 pipe range
- All metal parts insulated to avoid condensations
- EUROVENT Certified

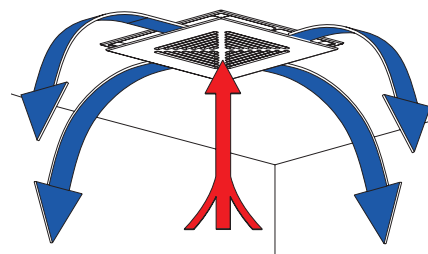

COANDA effect

The particular shape of the air outlet plenum is designed specifically in order to obtain the Coanda effect, a phenomenon for which the air outlet flow tends to adhere to the ceiling and falls down smoothly, without blowing directly towards people in the room: the optimal solution for a uniform and pleasant air diffusion.

YKEY and YKEY900 Hydro Cassette

1.1 kW to 10 kW



Technical features

Model YKEY -2 pipes			621	622	623	921	922
Total cooling capacity [kW]	(1)	max	2.52	3.68	4.72	8.63	9.99
		med	1.78	2.84	3.82	6.49	8.24
		min	1.42	2.27	2.51	3.86	5.65
Sensible cooling capacity [kW]	(1)	max	2.12	2.79	3.7	6.1	7.64
		med	1.4	2.06	2.89	4.49	6.2
		min	1.08	1.63	1.81	2.61	4.13
Water flow in cooling [l/h]	(1)	max	433	633	812	1484	1718
		med	306	488	657	1116	1417
		min	244	390	432	664	972
Pressure drop in cooling [kPa]	(1)	max	7.8	10.9	16.5	20.1	26
		med	4.6	7.3	11.5	12.3	19
		min	3.2	5.2	6	4.5	9
Heating capacity [kW]	(2)	max	2.66	3.65	4.89	8.33	10.18
		med	1.78	2.7	3.8	5.7	7.91
		min	1.38	2.09	2.39	3.25	5.04
Water flow in heating [l/h]	(2)	max	458	628	841	1433	1751
		med	306	464	654	980	1361
		min	237	359	411	559	867
Pressure drop in heating [kPa]	(2)	max	7	9.4	14.9	12.1	17.4
		med	3.4	5.3	9.5	6.1	11
		min	2.2	2	4.1	2.2	4.9
Water content [l]			1.34	2.12	2.12	4.26	4.26

Model YKEY -4 pipes			641	642	643	941	942
Total cooling capacity [kW]	(1)	max	1.76	3.11	3.88	7.49	9.04
		med	1.34	2.48	3.23	5.67	7.5
		min	1.1	2.04	2.25	3.41	5.2
Sensible cooling capacity [kW]	(1)	max	1.62	2.49	3.24	5.98	7.46
		med	1.17	1.91	2.61	4.42	6.08
		min	0.94	1.52	1.73	2.58	4.08
Water flow in cooling [l/h]	(1)	max	303	535	667	1288	1555
		med	230	427	556	975	1290
		min	189	351	387	587	894
Pressure drop in cooling [kPa]	(1)	max	7.5	11.2	16.7	23.2	32
		med	4.8	7.8	11.9	14.1	23
		min	3.6	5.7	6.6	5	12
Heating capacity [kW]	(3)	max	2.01	2.69	3.31	6.66	7.86
		med	1.47	2.2	2.84	5.32	6.75
		min	1.23	1.82	2.01	3.49	4.95
Water flow in heating [l/h]	(3)	max	173	231	285	573	676
		med	126	189	244	458	581
		min	106	157	173	300	426
Pressure drop in heating [kPa]	(3)	max	5.8	10.6	15.2	25	33.2
		med	3.3	7.4	11.8	15.9	25.6
		min	2.4	5.2	6.3	7.9	14.7
Water content [l]			1.34	2.12	2.12	4.26	4.26
Air flow [m³/h]		max	566	566	717	1420	1530
		med	351	351	525	813	960
		min	182	182	308	410	477
Sound power level [dB(A)]		max	49	49	58	54	63
		med	34	40	50	45	55
		min	30	34	37	30	40
Sound pressure level [dB(A)]		max	39.5	39.5	48.5	44.5	53.5
		med	24.5	30.5	40.5	35.5	45.5
		min	20.5	24.5	27.5	20.5	30.5
Power supply [V-ph-Hz]			230 /1 /50				
Power input [W]		max	52	52	86	127	161
Absorbed current [A]		max	0.25	0.25	0.38	0.62	0.68
Dimensions	Height	mm	328	328	328	360	360
	Width	mm	575	575	575	820	820
	Depth	mm	575	575	575	820	820

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water temperature: 45/40 °C

(3) Room temperature 20°C - Water inlet temperature: 65/55°C

The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.




Manufacturer reserves the rights to change specifications without prior notice.

YKEY-ECM and YKEY900-ECM Inverter Cassette

2 & 4 pipe system

A complete range from 1.1 kW to 9.6 kW

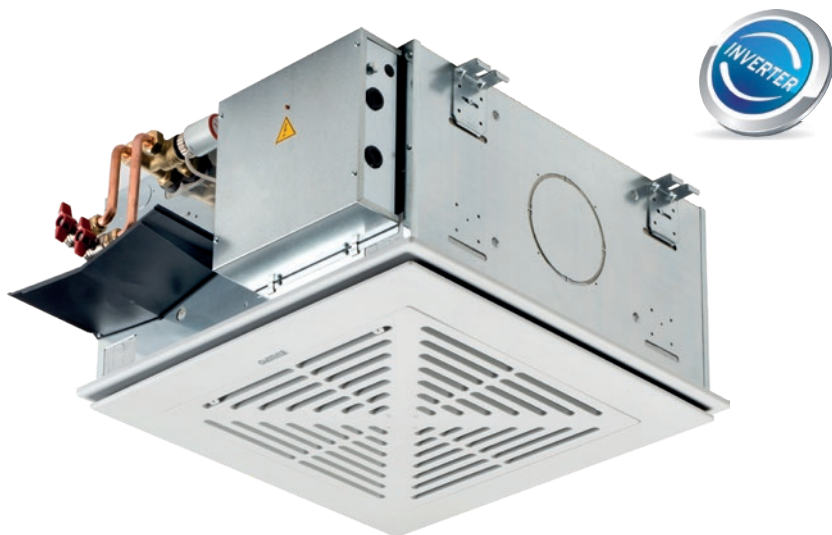

EDCR (Wall mounted)

Thermostat with manual or automatic fan speed and automatic change over for modulating valve



TUC03+ Terminal unit controller

BacNET and N2 Metasys network compatible



The YORK YKEY-ECM Cassette units, with energy saving motors, are designed for installation on a false ceiling, suitable for cooling and heating applications.

The ambient air drawn through the central air intake grill is blown into the circular heat exchanger, composed by copper pipes and aluminium fins, and then it comes out from the 4 sides of the cassette unit. Thanks to the special combination of air intake/air outlet grilles it is possible to obtain the pleasant COANDA effect.

Features


- Cooling duty from 1.3 to 11.1 kW
- Brushless motor and inverter technology
- 2 & 4 pipes systems in all range
- Central air intake grill
- 4 sides air outlet plenum
- 2 panel sizes: 600 x 600 & 900 x 900
- Possible choice between 6 fan speeds
- Condensate pump integrated in all range
- 2/3 way valves fitted or supplied loose in all range
- Coloured versions, possible to change the colour of the grill and the frame
- Possible to select a complete range of controls
- Electric heater fitted as an option for 2 pipe range
- All metal parts insulated to avoid condensations
- EUROVENT Certified



YKEY/M-ECM Special version with micro-drilled metallic grill



YKEY/H-ECM Special version with natural condensate water discharge

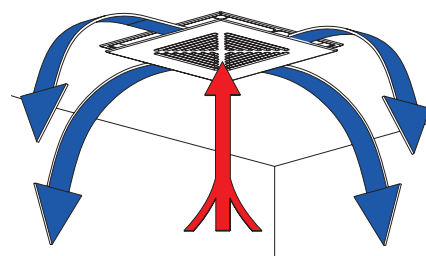

COANDA effect

The particular shape of the air outlet plenum is designed specifically in order to obtain the Coanda effect, a phenomenon for which the air outlet flow tends to adhere to the ceiling and falls down smoothly, without blowing directly towards people in the room: the optimal solution for an uniform and pleasant air diffusion.



Selection software

YKEY-ECM and YKEY900-ECM Inverter Cassette

1.1 kW to 9.6 kW



ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.



Technical features

Model YKEY-ECM -2 pipes			621	622	922
Total cooling capacity [kW]	(1)	max	2.85	4.85	9.60
		med	2.37	3.64	7.10
		min	1.63	2.56	4.24
Sensible cooling capacity [kW]	(1)	max	2.42	3.79	7.3
		med	1.93	2.69	5.29
		min	1.26	1.85	3.14
Water flow in cooling [l/h]	(1)	max	491	835	1652
		med	408	627	1222
		min	281	441	730
Pressure drop in cooling [kPa]	(1)	max	9.2	17.2	22.5
		med	6.9	10.6	14
		min	3.9	6.1	5.8
Heating capacity [kW]	(2)	max	2.99	4.91	10.21
		med	2.38	3.52	7.59
		min	1.59	2.33	3.59
Water flow in heating [l/h]	(2)	max	515	845	1757
		med	410	606	1306
		min	274	401	618
Pressure drop in heating [kPa]	(2)	max	9	16.2	25.3
		med	5.9	8.9	14.5
		min	2.9	4.2	4.7
Water content [l]			1.34	2.12	4.26

Model YKEY-ECM -4 pipes			641	642	942
Total cooling capacity [kW]	(1)	max	1.87	3.52	8.88
		med	1.68	2.75	6.8
		min	1.22	2.03	3.52
Sensible cooling capacity [kW]	(1)	max	1.73	3.32	6.73
		med	1.52	2.5	4.85
		min	1.08	1.73	2.57
Water flow in cooling [l/h]	(1)	max	322	678	1528
		med	289	530	1170
		min	210	391	606
Pressure drop in cooling [kPa]	(1)	max	7.9	17	30
		med	6.6	11	18.1
		min	4.1	6.7	10.1
Heating capacity [kW]	(3)	max	2.21	3.3	7.4
		med	1.84	2.64	5.7
		min	1.37	2.04	3.48
Water flow in heating [l/h]	(3)	max	190	284	637
		med	158	227	491
		min	118	176	299
Pressure drop in heating [kPa]	(3)	max	7.1	15.6	29.9
		med	5.2	10.5	24.2
		min	3	6.6	7.6
Water content [l]			1.34	2.12	4.26
Air flow [m³/h]		max	605	734	1497
		med	425	492	867
		min	235	260	384
Sound power level [dB(A)]		max	57	59	59
		med	49	49	49
		min	35	39	32
Sound pressure level [dB(A)]		max	47.6	49.6	49.6
		med	39.6	39.6	39.6
		min	25.6	29.6	22.6
Power supply [V-ph-Hz]			230 /1 /50		
Power input [W]		max	27	43	119
Absorbed current [A]		max	0.25	0.39	0.94
Dimensions	Height	mm	328	328	360
	Width	mm	575	575	820
	Depth	mm	575	575	820

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water temperature: 45/40 °C

(3) Room temperature 20°C - Water inlet temperature: 65/55°C

The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



Manufacturer reserves the rights to change specifications without prior notice.

YKEY and YKEY900 Cassette

YKEY-ECM and YKEY900-ECM Inverter Cassette

Compatibility tables

Compatibility Options / Accessories / Models


		YKEY and YKEY-ECM									
Code	Designation	621	622	623	921	922	641	642	643	941	942
Heaters											
KREL	Kit electrical heater with safety thermostat and relay	•	•	•	•	•					
Remote controllers and thermostats (wall mounted)											
CSR00	Fan speed selector (wall mounted)	•	•	•	•	•	•	•	•	•	•
CMR00	Thermostat with manual fan speed and S/W change over	•	•	•	•	•	•	•	•	•	•
CER00	Thermostat with manual fan speed, dead band, automatic change over	Compatible with electrical heaters									
CER20	Thermostat with automatic fan speed, dead band, automatic change over	Compatible with electrical heaters									
CER30	Thermostat with automatic fan speed, dead band, automatic change over for modulating valves	•	•	•	•	•	•	•	•	•	•
EDCR	Thermostat with manual or automatic fan speed, dead band, automatic change over for modulating valves - Only for ECM models	Compatible with electrical heaters									
OxT+OC716	Omnibus control + Remote Analogue Plus	Compatible with electrical heaters									
OxT+OC216	Omnibus control + Remote Display console	Compatible with electrical heaters									
Valves (Supplied loose) / Condensate pump / Air sensor / Water sensor (Factory fitted)											
DTH2B2 (2p)	2-way on/off valves for 2-pipe systems, 230V	•	•	•	•	•					
DTH2B2 (4p)	2-way on/off valves for 4-pipe systems, 230V						•	•	•	•	•
DTH3B2 (2p)	3-way 4-ports on/off valves for 2-pipe systems, 230V	•	•	•	•	•					
DTH3B2 (4p)	3-way 4-ports on/off valves for 4-pipe systems, 230V						•	•	•	•	•
DTH2B0 (2p)	2-way on/off valves for 2-pipe systems, 24V	•	•	•	•	•					
DTH2B0 (4p)	2-way on/off valves for 4-pipe systems, 24V						•	•	•	•	•
DTH3B0 (2p)	3-way 4-ports on/off valves for 2-pipe systems, 24V	•	•	•	•	•					
DTH3B0 (4p)	3-way 4-ports on/off valves for 4-pipe systems, 24V						•	•	•	•	•
DTJ2BM (2p)	2-way modulating valves for 2-pipe systems, 24V	•	•	•	•	•					
DTJ2BM (4p)	2-way modulating valves for 4-pipe systems, 24V						•	•	•	•	•
DTJ3BM (2p)	3-way 4-ports modulating valves for 2-pipe systems, 24V	•	•	•	•	•					
DTJ3BM (4p)	3-way 4-ports modulating valves for 4-pipe systems, 24V						•	•	•	•	•
QEC10	Galvanized metal electric panel with 230V/24V transformer	•	•	•	•	•	•	•	•	•	•
QEC20	Relay box for parallel connection for 230V actuators	•	•	•	•	•	•	•	•	•	•
QEC30	Relay box for parallel connection for 24V actuators	•	•	•	•	•	•	•	•	•	•
DT (2p)	Shut-off valves for 2-pipe systems supplied loose	•	•	•	•	•					
DT (4p)	Shut-off valves for 4-pipe systems supplied loose						•	•	•	•	•
AS	Air sensor	•	•	•	•	•	•	•	•	•	•
WS	Water sensor	Compatible with CEL/CER/EDCR									

- Compatible
- Compatible with conditions
- Not compatible


Dimensions & Weights



YKEY600 and YKEY600-ECM

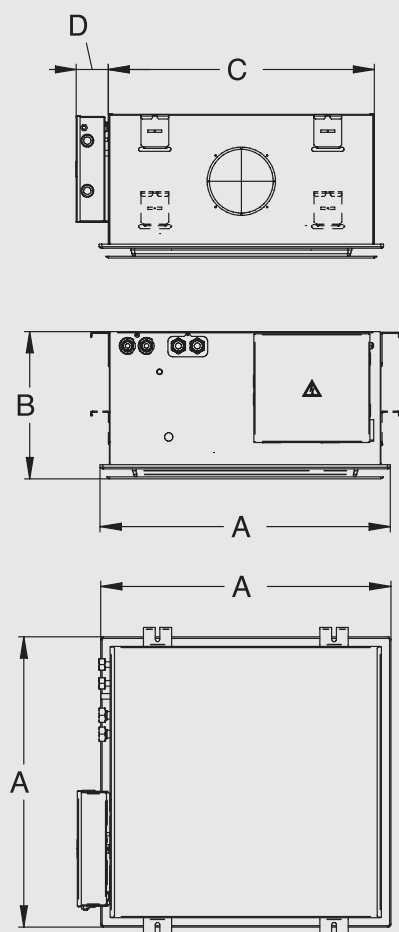

YKEY900 and YKEY900-ECM

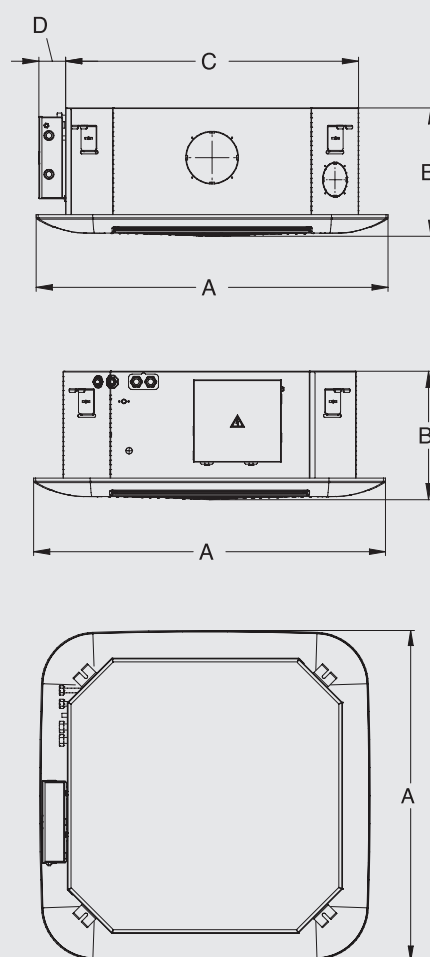

Model YKEY		621-641	622-642	623-643
A	mm	615	615	615
B	mm	328	328	328
C	mm	575	575	575
D	mm	75	75	75
Weight	kg	24 - 25,6	24 - 25,6	24 - 25,6

2 pipes installation		621	622	623
Water inlet		3/4 F	3/4 F	3/4 F
Water outlet		3/4 F	3/4 F	3/4 F

4 pipes installation		641	642	643
Cooling water inlet		3/4 F	3/4 F	3/4 F
Cooling water outlet		3/4 F	3/4 F	3/4 F
Heating water inlet		1/2 F	1/2 F	1/2 F
Heating water outlet		1/2 F	1/2 F	1/2 F

Model YKEY		921-941	922-942
A	mm	985	985
B	mm	360	360
C	mm	820	820
D	mm	75	75
Weight	kg	45	45


2 pipes installation		621	622
Water inlet		3/4 F	3/4 F
Water outlet		3/4 F	3/4 F

4 pipes installation		641	642
Cooling water inlet		3/4 F	3/4 F
Cooling water outlet		3/4 F	3/4 F
Heating water inlet		1/2 F	1/2 F
Heating water outlet		1/2 F	1/2 F

YHK Hydro Cassette

2 & 4 pipe system

A complete range from 1.3 kW to 11.1 kW

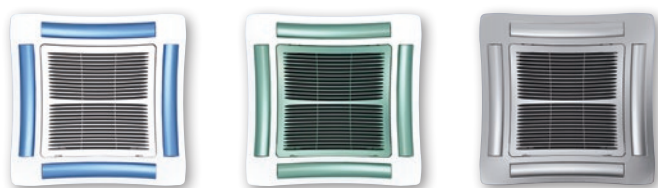

Coloured versions available as an option

YHK Hydro Cassette units are simple and elegant, discreet in their design. High standards of quality and reliability, combined with a wide range of accessories ensure a total solution for all comfort cooling and heating requirements.



Selection software

Wired controls



WM-3V

Remote three speeds controller

JWC-T

WC-3V + Electronic thermostat and Summer/Winter switch

JWC-AU

Automatic JWC-T



T-MB

Digital Automatic Remote controller

WM-503-AC-EC

Digital Automatic Remote controller to be mounted in the standard light wall box



Infrared control



TUC03+ Terminal unit controller

BacNET and N2 Metasys network compatible



Features

- Cooling duty from 1.3 to 11.1 kW
- 2 & 4 pipes systems in all range
- 2 sizes: 600 x 600 & 800 x 800
- Possible choice between 6 fan speeds
- Condensate pump integrated in all range
- 2/3 way valves fitted or supplied loose in all range
- Coloured versions, possible to change the colour of the grill and the frame
- Possible to select a complete range of controls
- Electric heater fitted as an option for all range (2 pipe only)
- All metal parts insulated to avoid condensations
- EUROVENT Certified

YHK Hydro Cassette

1.3 kW to 11.1 kW



Technical features

Model YHK -2 pipes			20-2	25-2	40-2	50-2	65-2	95-2	110-2
Total cooling capacity 2 Pipes [kW]	(1)	max	1.92	2.64	4.26	4.93	6.08	9.39	10.93
		med	1.60	2.31	3.30	3.82	4.86	6.72	8.36
		min	1.25	1.82	2.23	2.91	4.18	5.27	5.27
Sensible cooling capacity 2 Pipes [kW]	(1)	max	1.58	2.00	3.11	3.65	4.51	6.36	8.08
		med	1.29	1.72	2.35	2.75	3.53	4.42	6.00
		min	0.99	1.33	1.55	2.05	3.00	3.42	3.67
Water flow in cooling 2 Pipes [l/h]	(1)	max	340	461	745	863	1 060	1 636	1 909
		med	280	402	574	667	845	1 166	1 453
		min	219	316	387	506	724	913	913
Pressure drop in cooling 2 Pipes [kPa]	(1)	max	10	9.7	20.9	19.7	21.6	26.9	35.6
		med	7	7.6	13.0	12.4	14.3	14.7	21.8
		min	4.5	4.9	6.4	7.5	10.9	9.4	9.4
Heating capacity 2 pipes [kW]	(2)	max	2.24	2.80	4.37	5.15	6.50	9.23	11.72
		med	1.80	2.42	3.28	3.85	5.03	6.40	8.55
		min	1.38	1.85	2.12	2.85	4.27	4.92	5.12
Water flow in heating 2 pipes [l/h] *	(2)	max	340	461	745	863	1 060	1 636	1 909
		med	280	402	574	667	845	1 166	1 453
		min	219	316	387	506	724	913	913
Pressure drop in heating 2 pipes [kPa]	(2)	max	10.7	9.0	10.2	17.8	15.0	22.0	33.8
		med	7.2	6.9	6.1	10.6	9.4	11.4	19.2
		min	4.4	4.3	2.8	6.2	7.0	7.1	7.6
Heating capacity 2 pipes [kW]	(3)	max	4.6	5.7	9.3	10.6	13.1	19.8	23.7
		med	3.7	4.9	7	8.3	10.7	13.4	17.3
		min	2.8	4.2	4.9	6.1	8.6	10.3	10.3
Water flow in heating 2 pipes [l/h]	(3)	max	393	488	795	914	1 130	1 699	2 037
		med	315	422	598	709	874	1 155	1 484
		min	240	360	415	524	741	882	882
Pressure drop in heating 2 pipes [kPa]	(3)	max	9.9	8.4	12.5	16	17.5	20.9	28.9
		med	6.5	6.4	7.6	10	11.3	10.6	16
		min	4	4.8	4	5.9	8.4	6.7	6.7
Water content (2 pipes) [l]			0.8	1.4	2.1	2.1	3.0	4.0	4.0

Model YHK -4 pipes			20-4	25-4	40-4	40-6	50-4	50-6	65-4	95-4	95-6	110-4	110-6
Total cooling capacity 4 Pipes [kW]	(1)	max	2.27	2.66	3.27	3.86	3.72	4.44	6.26	7.59	8.65	8.72	9.69
		med	1.93	2.33	2.61	3.02	2.96	3.47	4.98	5.60	6.27	6.84	7.75
		min	1.49	1.83	1.83	2.07	2.33	2.69	4.11	4.48	4.95	4.48	4.95
		max	1.84	1.94	2.49	2.88	2.88	3.37	4.61	5.71	6.37	6.67	7.26
Sensible cooling capacity 4 Pipes [kW]	(1)	med	1.52	1.68	1.94	2.20	2.23	2.56	3.60	4.09	4.49	5.09	5.64
		min	1.13	1.32	1.32	1.47	1.72	1.94	2.93	3.21	3.49	3.21	3.49
		max	401	464	574	664	655	764	1 090	1 326	1 488	1 529	1 667
		med	337	406	456	519	519	597	865	974	1 078	1 192	1 333
Water flow in cooling 4 pipes [l/h]	(1)	min	260	318	318	355	406	462	712	777	851	777	851
		max	13.5	8.8	13.4	10.5	17	14.0	18.9	26.9	25.0	34.7	32.0
		med	10	6.9	8.8	7.0	11.2	9.0	12.5	15.4	14.0	22.1	20.0
		min	6	4.6	4.6	4.0	7.2	6.0	8.8	10.3	9.0	10.3	9.0
Pressure drop in cooling 4 pipes [kPa]	(1)	max	2.66	3.04	3.86	2.91	4.19	3.29	8.02	9.66	7.50	11.16	9.48
		med	2.23	2.66	3.04	2.71	3.33	2.66	6.33	7.15	5.63	8.80	6.78
		min	1.72	2.13	2.13	1.73	2.61	2.14	5.21	5.69	4.59	5.69	4.59
		max	261	298	378	250	426	283	783	946	645	1 092	815
Water flow in heating 4 pipes [l/h] *	(4)	med	219	260	298	233	341	229	618	697	484	858	583
		min	169	209	209	149	267	184	508	555	395	555	395
		max	11.4	8.7	13.3	6.7	15.0	8.4	17.2	24.0	11.8	31.2	15.0
		med	8.3	6.8	8.7	4.6	9.9	5.7	11.2	14.0	7.0	20.3	9.9
Pressure drop in heating 4 pipes [kPa]	(4)	min	5.2	4.6	4.6	2.6	6.4	3.9	7.9	9.3	4.9	9.3	4.9
		max	610	520	710	710	880	880	1 140	1 500	1 500	1 820	1 820
		med	420	420	500	500	610	610	820	970	970	1 280	1 280
		min	310	310	320	320	430	430	630	710	710	710	710
Sound power level [dB(A)]		max	49	45	53	53	59	59	48	53	53	58	58
		med	40	40	45	45	49	49	40	40	40	48	48
		min	33	33	33	33	41	41	33	34	34	34	34
		max	40	36	44	44	50	50	39	44	44	49	49
Sound pressure level [dB(A)]	(5)	med	31	31	36	36	40	40	31	31	31	39	39
		min	24	24	24	24	32	32	24	25	25	25	25
		Power supply [V-ph-Hz]											
		230 /1 /50											
Power input [W]			max	69.5	56.5	80.5	80.5	102.5	102.5	89.5	132.5	132.5	182.5
Absorbed current [A]			max	0.40	0.35	0.45	0.45	0.60	0.60	0.50	0.65	0.65	0.90
Cooling water content (4 pipes) [l]				1.0	1.4	1.4	1.7	1.4	1.7	3.0	3.6	3.0	3.6
Heating hater content (4 pipes) [l]				0.6	0.7	0.7	0.5	0.7	0.5	1.4	1.4	1.0	1.1
Dimensions	Height	mm	275	275	275	275	275	275	303	303	303	303	303
	Width	mm	575	575	575	575	575	575	820	820	820	820	820
	Depth	mm	575	575	575	575	575	575	820	820	820	820	820

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C (2) Room temperature 20°C - Water temperature: 45/40 °C

(3) Room temperature 20°C - Water inlet temperature: 70/60°C

(4) Room temperature 20°C - Water inlet temperature: 65/55°C

(5) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

* Water flow values as Cooling, accordingly to the EUROVENT standards and UNI ENV 1397



Manufacturer reserves the rights to change specifications without prior notice.

YHK-ECM Inverter Hydro Cassette

2 & 4 pipe system

A complete range from 1.8 kW to 15.1 kW



Coloured versions available as an option



Wired control

T-MB

Wall control with display that allows controlling one or more units in Master/Slave mode. The control is equipped with internal sensor to detect the room temperature, which can be defined as a priority compared to the return air sensor on the fan coil.



Infrared control



TUC03+ Terminal unit controller
BacNET and N2 Metasys network compatible



YHK ECM water cassette is the result of significant technical and design research focused on providing an avant-garde product in terms of performance, low noise and control flexibility. YHK ECM series uses an innovative brushless electric motor controlled by an inverter card that varies the air flow continuously by means of a 1-10 V signal. The extreme efficiency, also at a low speed, makes it possible to greatly reduce electrical consumption (more than 75% less in comparison to a traditional motor) with absorption values, under normal operating conditions, that are no greater than 10 Watt in the entire range.

Features

- Cooling duty from 1.8 to 15.1 kW
- YHK: models with infrared control (standard)
- YHK-MP: models with wired control (accessory)
- 2 (-2) & 4 (-4 or -6) pipes systems
- 3 sizes: 600 x 600, 800 x 800 & 870 x 870
- Condensate pump integrated in all range
- 2/3 way valves fitted or supplied loose in all range
- Coloured versions, possible to change the colour of the grid and the frame
- All metal parts insulated to avoid condensations
- Inverter fan motor for a very quiet operation
- Electrical consumption reduced by up to 75%
- Specific range of controllers with master-slave function
- EUROVENT Certified



Selection software

YHK-ECM Inverter Hydro Cassette

1.8 kW to 15.1 kW



ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.

Technical features

Model -2 pipes			YHK-ECM 25-2	YHK-ECM 40-2	YHK-ECM 50-2	YHK-ECM 65-2	YHK-ECM 95-2	YHK-ECM 125-2	YHK-ECM 150-2
Total cooling capacity 2 Pipes [kW]	(1)	max 10v	2.73	4.30	4.96	6.30	10.69	12.60	15.13
		med 5v	2.16	3.04	3.85	5.13	7.69	9.43	11.38
		min 1v	1.84	2.24	2.55	4.20	5.28	6.36	7.86
Sensible cooling capacity 2 Pipes [kW]	(1)	max	2.07	3.15	3.68	4.69	7.83	9.31	11.41
		med	1.60	2.16	2.79	3.75	5.50	6.77	8.30
		min	1.35	1.57	1.80	3.02	3.68	4.45	5.58
Water flow in cooling 2 Pipes [l/h]	(1)	max	473	744	864	1 089	1 848	2167	2602
		med	373	524	666	885	1 328	1622	1957
		min	317	385	441	723	909	1094	1352
Pressure drop in cooling 2 Pipes [kPa]	(1)	max	10.1	15.1	19.7	22.7	33.0	22.7	31.8
		med	6.6	9.4	12.4	15.6	18.5	13.4	18.8
		min	4.9	4.6	5.9	10.9	9.4	6.6	9.6
Heating capacity 2 pipes [kW]	(2)	max	2.87	4.36	5.15	6.70	10.56	13.39	16.40
		med	2.22	2.98	3.85	5.30	7.34	9.59	11.86
		min	1.85	2.12	2.46	4.27	4.90	6.18	7.82
Pressure drop in heating 2 pipes [kPa]	(2)	max	9.4	13.2	17.8	21.6	28.1	21.5	31.0
		med	5.9	6.6	10.6	14.2	14.6	11.8	17.3
		min	4.3	3.6	4.7	9.6	7.0	5.4	8.2

Model -4 pipes			YHK-ECM 25-4	YHK-ECM 40-6	YHK-ECM 50-6	YHK-ECM 65-4	YHK-ECM 95-6	YHK-ECM 125-4	YHK-ECM 150-4	
Total cooling capacity 4 Pipes [kW]	(1)	max	2.75	3.90	4.47	6.48	9.76	11.61	13.59	
		med	2.17	2.81	3.51	5.29	7.14	8.86	10.59	
		min	1.85	2.09	2.37	4.29	4.97	6.07	7.45	
Sensible cooling capacity 4 Pipes [kW]	(1)	max	2.06	2.92	3.40	4.80	7.29	8.87	10.68	
		med	1.59	2.03	2.60	3.82	5.17	6.53	7.96	
		min	1.34	1.49	1.70	3.07	3.51	4.33	5.4	
Water flow in cooling 4 pipes [l/h]	(1)	max	476	676	779	1 120	1 697	1997	2337	
		med	375	483	608	908	1 233	1524	1821	
		min	318	359	409	740	856	1044	1281	
Pressure drop in cooling 4 pipes [kPa]	(1)	max	9.5	10.3	13.1	19.8	30.1	22.6	30.4	
		med	6.2	5.6	8.4	13.6	17.0	13.8	19.1	
		min	4.6	3.3	4.1	9.4	8.8	7.0	10.1	
Heating capacity 4 pipes [kW]	(3)	max	3.18	2.91	3.29	8.24	8.33	10.55	12.17	
		med	2.51	2.20	2.66	6.65	6.27	8.4	9.8	
		min	2.13	1.73	1.92	5.41	4.58	6.01	7.19	
Water flow in heating 4 pipes [l/h]	(3)	max	311	288	326	805	818	907	1047	
		med	245	217	263	649	616	722	843	
		min	209	170	189	528	449	517	618	
Pressure drop in heating 4 pipes [kPa]	(3)	max	9.4	6.7	8.4	18.1	14.3	19.9	25.7	
		med	6.1	4.1	5.7	12.3	8.6	13.2	17.4	
		min	4.6	2.6	3.2	8.5	4.9	7.2	10.0	
Air flow [m3/h]		max	535	710	880	1 165	1 770	1 905	2480	
		med	380	445	610	870	1 130	1 290	1 650	
		min	310	310	360	630	710	790	1 025	
Sound power level [dB(A)]		max	47	54	60	48	57	58	64	
		med	39	43	50	39	47	49	55	
		min	33	33	37	33	34	38	44	
Sound pressure level [dB(A)]	(4)	max	38	45	51	39	48	49	55	
		med	30	34	41	30	38	40	46	
		min	24	24	28	24	25	29	35	
Power supply [V-ph-Hz]			230 /1 /50							
Power input [W]			max	28.5	44.0	81.0	43.5	126.0	105.0	195.0
Water content (2 pipes) [l]			max	1.4	2.1	2.1	3.0	4.0	4.6	4.6
Absorbed current [A]			max	0.25	0.40	0.70	0.40	1.10	0.80	1.30
Dimensions	Height	mm	275	275	275	303	303	304	304	
	Width	mm	575	575	575	820	820	869	869	
	Depth	mm	575	575	575	820	820	869	869	

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water temperature: 45/40 °C


(3) Room temperature 20°C - Water inlet temperature: 65/55°C

(4) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

* Water flow values as Cooling, accordingly to the EUROVENT standards and UNI ENV 1397



Condensate pump integrated in all sizes



Metal parts insulated to avoid condensation



2 or 3 way valves fitted or supplied loose in all sizes



Outer casing as an option to integrate the water cassette into any environment



Manufacturer reserves the rights to change specifications without prior notice.

Compatibility table / Codes

Model with AC motor (without air diffuser)		YHKY 20	YHKY 25	YHKY 40	YHKY 50	YHKY 65	YHKY 95	YHKY 110	-	-
Cassette YHKY	2 pipe system	0079100K	0079000K	0079001K	0079002K	0079003K	0079004K	0079005K	-	-
	4 pipe system	0079110K	0079010K	0079011K	0079012K	0079013K	0079014K	0079015K	-	-
Cassette YHKY-MP (IR remote control and sensor NOT included)	2 pipe system	0079170K	0079171K	0079172K	0079173K	0079174K	0079175K	0079176K	-	-
	4 pipe system	0079180K	0079181K	0079182K	0079183K	0079184K	0079185K	0079186K	-	-
Cassette YHKY-E - with electric resistance	2 pipe system	-	0079060K	0079061K	0079062K	0079063K	0079064K	0079065K	-	-
Cassette YHKY-MP-E - with electric resistance	2 pipe system	-	0079191K	0079192K	0079193K	0079194K	0079195K	0079196K	-	-
Cassette YHKY-REB with remote electric board	2 pipe system	0079120K	0079020K	0079021K	0079022K	0079023K	0079024K	0079025K	-	-
	4 pipe system	0079130K	0079030K	0079031K	0079032K	0079033K	0079034K	0079035K	-	-
Model with ECM motor (without air diffuser)		-	YHKY 25	YHKY 40	YHKY 50	YHKY 65	YHKY 95	-	YHKY 125	YHKY 150
Cassette YHKY-ECM - basic model	2 pipe system	-	0079801K	0079802K	0079803K	0079804K	0079805K	-	0079807K	0079808K
	4 pipe system	-	0079811K	0079812K	0079813K	0079814K	0079815K	-	0079817K	0079818K
Cassette YHKY-MP- ECM (IR remote control and sensor NOT included)	2 pipe system	-	0079911K	0079912K	0079913K	0079914K	0079915K	-	0079917K ⁽⁶⁾	0079918K ⁽⁶⁾
	4 pipe system	-	0079921K	0079922K	0079923K	0079924K	0079925K	-	0079927K ⁽⁶⁾	0079928K ⁽⁶⁾
Cassette YHKY-ECM-E - with electric resistance	2 pipe system	-	0079841K	0079842K	0079843K	0079844K	0079845K	-	0079847K	0079848K
Cassette YHKY-ECM-MP-E - with electric resistance	2 pipe system	-	0079901K	0079902K	0079903K	0079904K	0079905K	-	0079907K	0079908K

Mandatory accessories (units cannot work without them)

Air diffuser - intake grid, frame and louveres in RAL 9003 white colour	AKPA 600	AKPA 800	AKPA 900
---	----------	----------	----------

Accessories (factory fitted)

Valves (220V On/Off)				
3 way valve + mounting kit for 2 pipe models (factory fitted)	9079510	9079511	9079923	
3 way valve + mounting kit for 4 pipe models (factory fitted)	9079512	9079513	9079933	
2 way valve + mounting kit for 2 pipe models (factory fitted)	9079515	9079516	9079921	
2 way valve + mounting kit for 4 pipe models (factory fitted)	9079517	9079518	9079931	
2 way DN 15 balance valve for main coil + connection kit (fact. fitted) *	9079771	9079791	-	-
2 way DN 20 balance valve for main coil + connection kit (fact. fitted) *	-	9079792	-	-
2 way DN 15 balance valve for additional coil + connection kit (fact. fitted) *	9079773	9079793	-	-

Accessories (supplied loose)

Air diffusers / Panels				
Air diffuser - other colours (*)	Contact Johnson Controls			
Valves (220V On/Off)				
3 way valve + mounting kit for 2 pipe models (not fitted)	9079500		9079501	9079922
3 way valve + mounting kit for 4 pipe models (not fitted)	9079502		9079503	9079932
2 way valve + mounting kit for 2 pipe models (not fitted)	9079505		9079506	9079920
2 way valve + mounting kit for 4 pipe models (not fitted)	9079507		9079508	9079930
2 way DN 15 balance valve for main coil + connection kit (not fitted) *	9079761	9079781	-	-
2 way DN 20 balance valve for main coil + connection kit (not fitted) *	-		9079782	-
2 way DN 15 balance valve for additional coil + connection kit (not fitted) *	9079763		9079783	-
Other type of valves	Contact Johnson Controls			

Other Accessories

Outer casing OCA 600	9079240	-	-
Outer casing OCA 800	-	9079250	-
3 way valve + mounting kit for units with outer casing OCA (not fitted)	9079155	9079221	-
Fresh air duct FAD	6078005	-	-
Fresh air kit 1 way not suitable for units with outer casing OCA - FAK 600	9079230	-	-
Fresh air kit 1 way not suitable for units with outer casing OCA - FAK 800	-	9079231	-
Fresh air kit 1 way not suitable for units with outer casing OCA - FAK 900	-	-	9079235
MD-600 Metal Grid	9079420	-	-
MD-800 Metal Grid	-	9079417	-

CONTROLS for YHKY (AC versions)

Remote three speed control WM-3V (1) (4)	9066642
Remote three speed control + electronic thermostat and manual S/W switch JWC-T (2)	9066630K
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)	9066632K
Automatic remote control with electronic thermostat, S/W switch and liquid crystal display T-MB (to be used with UPM-AU and UP-AU only) (2) (3)	9066331E
Automatic speed control with electronic thermostat to be mounted in the light wall box WM-503-AC-EC (to be used with UP-503-AC-EC only)	9066686
Electromechanical thermostat T2T (4) (5)	9060174
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit	9066641
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit	9066640
Power unit UP-503-AC-EC for WM-503-AC-EC remote control only, not fitted	9066687

Control accessories for all versions (supplied with separate packaging)

Low temperature cut-out for control JWC-T	9053048
Low temperature cut-out for controls JWC-TQR, WM-503 and UP-AU power unit	3021090
T2 sensor to be used as Change-over for UP-AU power unit	9025310
Change-over 15-25 for control JWC-TQR	9053049
Receiver SEL2M	9079109

* For 4 pipes unit must consider both the valve for main coil than the valve for additional coil.

(1) Not to be used with valves. (2) Can be used with valves and/or low temperature cut-out.


(3) Can be used with Change Over. (4) Not suitable with -E electric heater. (5) Not to be used with low temperature cut-out. (6) Receiver included.

Compatibility table / Codes

CONTROLS for YHKY-MP (AC versions)		YHKY 20	YHKY 25	YHKY 40	YHKY 50	YHKY 65	YHKY 95	YHKY 110	YHKY 125	YHKY 150
Wall control T-MB					9066331E					-
Wire, receiver and IR remote control kit RCS-RT03					9079117					-
Infra red remote control RT-03					3021203					-
Wire and receiver kit RCS					9079116					-
Receiver for IR remote control for metal grid MD600 and MD800 RS			9066338			9066338				-
Multifunction control PSM-DI					3021293					
T2 sensor (to be used as change over or min.temp. sensor) T2					9025310					
CONTROLS for YHKY-ECM (ECM motor)										
Automatic speed control with electronic thermostat and S/W switch - JWC-AU (to be used with UPM-AU and UP-AU only) (2) (3)			9066632K			9066632K			9066632K	
Automatic remote control with electronic thermostat, S/W switch and liquid crystal display T-MB (to be used with UPM-AU and UP-AU only) (2) (3)			9066331E			9066331E			9066331E	
WM-S-ECM Continuous fan speed control with electronic thermostat, summer/winter switch and LCD display					9066644					
Power unit UPM-AU for JWC-AU and T-MB remote controls, fitted on the unit					9066641					
Power unit UP-AU for JWC-AU and T-MB remote controls, not fitted on the unit					9066640					
Control accessories for all versions (supplied with separate packaging)										
Low temperature cut-out for UP-AU power unit					3021090					
T2 sensor to be used as Change-over for UP-AU power unit					9025310					
CONTROLS for YHKY-MP-ECM (ECM motor)										
Wall control T-MB					9066331E					
Wire, receiver and IR remote control kit RCS-RT03					9079117				-	
Infra red remote control RT-03					3021203					
Wire and receiver kit RCS					9079116					
Receiver for IR remote control for metal grid MD600 and MD800 RS			9066338						-	
Multifunction control PSM-DI					3021293					
T2 sensor (to be used as change over or min.temp. sensor) T2					9025310					
Management system for a network of fan coils with MB electronic board										
Hardware / software supervisory system Net					9079118					
Router-S for NET (default) or for BMS systems no provided by YORK					3021290					
Relay output board SIOS					3021292					


Dimensions

Sizes 20 to 50
(Version 600 x 600)

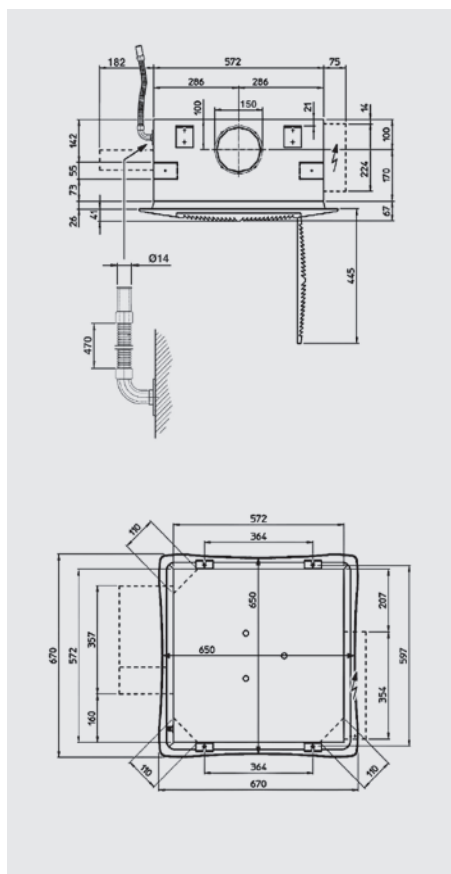


All dimensions in mm. Drawings not a scale.

Sizes 65 to 110
(Version 800 x 800)

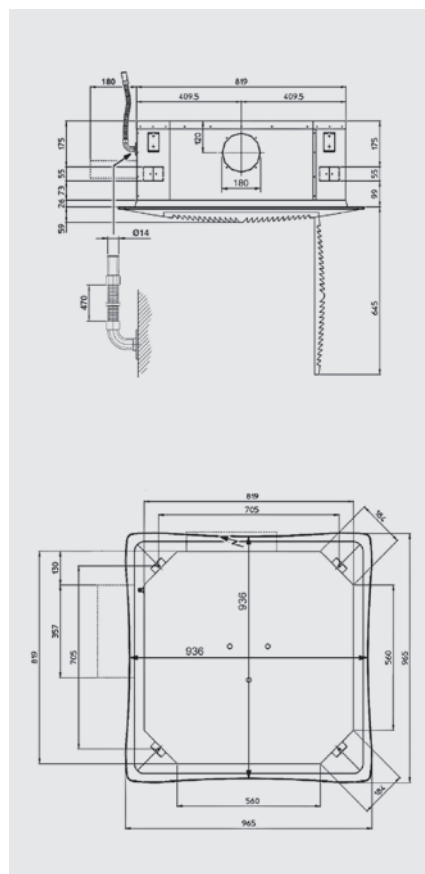

Sizes 125 to 150
(Version 870 x 870)

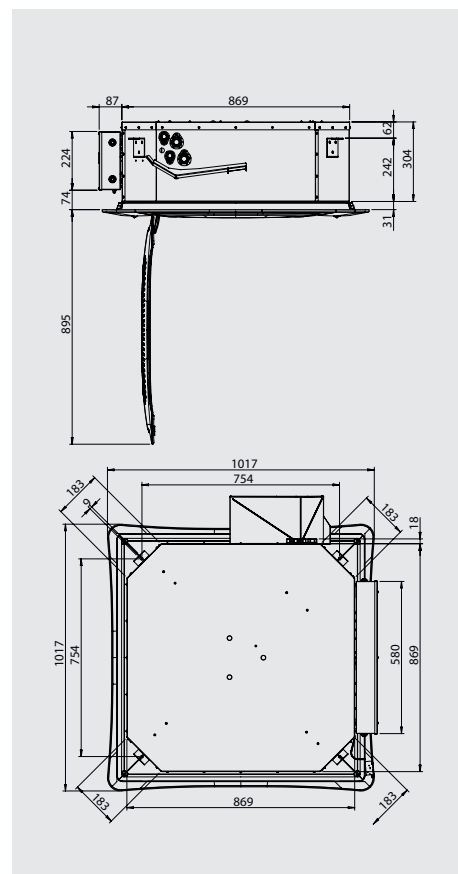

YHVP & YHVP-ECM Hydro High Wall

2 pipe system

A range from 1.17 kW to 3.81 kW



JWC-T Wired Control

Remote three speeds controller, electronic thermostat and Summer/Winter switch

JWC-AU Wired Control

Automatic JWC-T



Electronic Infrared Control



TUC03+ Terminal unit controller

BacNET and N2 Metasys network compatible



Features

- Available with standard AC motors or low energy EC motors
- Wired control or infrared control
- Automatic air sweep (-T and -MB variants only)
- Choice of 2 or 3 way valves fitted
- Condensate collection tray
- Air filter included
- Heat exchange coil
- EUROVENT Certified



2 Way Valve ON/OFF

with thermoelectric actuator. Suitable for the connection with Ø 12 mm pipes

Wired control (YHVP)

- 4 operation modes (Cool/Heat/Auto/Fan)
- Room temperature and setting
- Fan speed selector (Auto, low, medium and high)

Infrared control (YHVP-T)

- Wireless
- 5 operation modes (Cool/Heat/Auto/Dry/Fan)
- Sleep Mode
- Room Temperature setting
- Fan speed selection
- Timer
- Air flow direction setting
- LCD display

Note: model shown is -T variant with automatic air sweep function

YHVP & YHVP-ECM Hydro High Wall

1.17 kW to 3.81 kW



Technical features

Model		YHVP 1	YHVP 2	YHVP 3	YHVP 4
Total cooling capacity [kW]	(1) max	1.85	2.16	3.00	3.76
	med	1.49	1.82	2.30	3.23
	min	1.23	1.42	1.87	2.60
Sensible cooling capacity [kW]	(1) max	1.44	1.73	2.24	2.93
	med	1.13	1.41	1.67	2.44
	min	0.91	1.06	1.33	1.91
Heating capacity [kW]	(2) max	2.18	2.62	3.23	4.28
	med	1.68	2.13	2.37	3.53
	min	1.34	1.58	1.89	2.73
Air flow [m ³ /h]	max	375	480	545	790
	med	270	365	375	610
	min	205	250	280	440
Sound power level [dB(A)]	max	48	53	48	57
	med	41	47	40	51
	min	35	39	35	43
Sound pressure level [dB(A)]	(3) max	39	44	39	48
	med	32	38	31	42
	min	26	30	26	34
Power supply [V-ph-Hz]		230V/1ph/50Hz			
Power input [W]	max	30	32	46	48
Absorbed current [A]	max	0.16	0.16	0.23	0.23
Dimensions	Height mm	322	322	322	322
	Width mm	880	880	1 185	1 185
	Depth mm	212	212	212	212

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C.

(3) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.

ECM the Energy Saving Technology

Brushless motor with inverter managed by dedicated controls. It permits to maintain extremely low electrical absorption and a continuous modulation of the air flow.

Technical features

Model		YHVP-ECM 1	YHVP-ECM 2	YHVP-ECM 3	YHVP-ECM 4
Total cooling capacity [kW]	(1) max 10v	1.98	2.24	3.27	3.72
	med 5v	1.57	1.86	2.52	3.03
	min 1v	1.16	1.46	1.82	2.33
Sensible cooling capacity [kW]	(1) max	1.56	1.81	2.48	2.89
	med	1.19	1.45	1.85	2.27
	min	0.85	1.09	1.30	1.69
Heating capacity [kW]	(2) max	2.35	2.74	3.57	4.20
	med	1.78	2.18	2.63	3.26
	min	1.26	1.63	1.83	2.40
Air flow [m ³ /h]	max	415	510	620	770
	med	290	375	420	550
	min	190	260	270	375
Sound power level [dB(A)]	max	52	55	53	57
	med	46	47	45	49
	min	35	40	37	43
Sound pressure level [dB(A)]	(3) max	43	46	44	48
	med	37	38	36	40
	min	26	31	28	34
Power supply [V-ph-Hz]		230V/1ph/50Hz			
Power input [W]	max	15	21	20	30
Absorbed current [A]	max	0.14	0.19	0.18	0.26
Dimensions	Height mm	322	322	322	322
	Width mm	880	880	1 185	1 185
	Depth mm	212	212	212	212

(1) Room temperature 27°C d.b., 19°C w.b. - Water temperature 7/12 °C

(2) Room temperature 20°C - Water inlet temperature: 45/40°C.

(3) The sound pressure levels are 9 dB(A) lower than the sound power levels and apply to the reverberant field of a 100 m³ room and a reverberation time of 0.5 sec.



Manufacturer reserves the rights to change specifications without prior notice.

Codes high wall fan coil units YHVP

Unit without IR control without valve	YHVP 1	YHVP 2	YHVP 3	YHVP 4
Unit codes	0025001K	0025002K	0025003K	0025004K
Unit without IR control with 2 way valve	YHVP-2V 1	YHVP-2V 2	YHVP-2V 3	YHVP-2V 4
Unit codes	0025101K	0025102K	0025103K	0025104K
Unit without IR control with 3 way valve	YHVP-3V 1	YHVP-3V 2	YHVP-3V 3	YHVP-3V 4
Unit codes	0025201K	0025202K	0025203K	0025204K
Unit with IR control without valve	YHVP-T 1	YHVP-T 2	YHVP-T 3	YHVP-T 4
Unit codes	0025021K	0025022K	0025023K	0025024K
Unit with IR control with 2 way valve	YHVP-T-2V 1	YHVP-T-2V 2	YHVP-T-2V 3	YHVP-T-2V 4
Unit codes	0025121K	0025122K	0025123K	0025124K
Unit with IR control with 3 way valve	YHVP-T-3V 1	YHVP-T-3V 2	YHVP-T-3V 3	YHVP-T-3V 4
Unit codes	0025221K	0025222K	0025223K	0025224K
Unit with MB board without valve	YHVP-MB 1	YHVP-MB 2	YHVP-MB 3	YHVP-MB 4
Unit codes	0025011K	0025012K	0025013K	0025014K
Unit with MB board with 2 way valve	YHVP-MB-2V 1	YHVP-MB-2V 2	YHVP-MB-2V 3	YHVP-MB-2V 4
Unit codes	0025111K	0025112K	0025113K	0025114K
Unit with MB board with 3 way valve	YHVP-MB-3V 1	YHVP-MB-3V 2	YHVP-MB-3V 3	YHVP-MB-3V 4
Unit codes	0025211K	0025212K	0025213K	0025214K
Unit without IR control without valve with electrical coil	YHVP-E 1	YHVP-E 2	YHVP-E 3	YHVP-E 4
Unit codes	0025031K	0025032K	0025033K	0025034K
Unit without IR control with 2 way valve with electrical coil	YHVP-E-2V 1	YHVP-E-2V 2	YHVP-E-2V 3	YHVP-E-2V 4
Unit codes	0025131K	0025132K	0025133K	0025134K
Unit without IR control with 3 way valve with electrical coil	YHVP-E-3V 1	YHVP-E-3V 2	YHVP-E-3V 3	YHVP-E-3V 4
Unit codes	0025231K	0025232K	0025233K	0025234K
Unit with IR control without valve with electrical coil	YHVP-T-E 1	YHVP-T-E 2	YHVP-T-E 3	YHVP-T-E 4
Unit codes	0025041K	0025042K	0025043K	0025044K
Unit with IR control with 2 way valve with electrical coil	YHVP-T-E-2V 1	YHVP-T-E-2V 2	YHVP-T-E-2V 3	YHVP-T-E-2V 4
Unit codes	0025141K	0025142K	0025143K	0025144K
Unit with IR control with 3 way valve with electrical coil	YHVP-T-E-3V 1	YHVP-T-E-3V 2	YHVP-T-E-3V 3	YHVP-T-E-3V 4
Unit codes	0025241K	0025242K	0025243K	0025244K
Unit with MB board without valve with electrical coil	YHVP-MB-E 1	YHVP-MB-E 2	YHVP-MB-E 3	YHVP-MB-E 4
Unit codes	0025051K	0025052K	0025053K	0025054K
Unit with MB board with 2 way valve with electrical coil	YHVP-MB-E-2V 1	YHVP-MB-E-2V 2	YHVP-MB-E-2V 3	YHVP-MB-E-2V 4
Unit codes	0025151K	0025152K	0025153K	0025154K
Unit with MB board with 3 way valve with electrical coil	YHVP-MB-E-3V 1	YHVP-MB-E-3V 2	YHVP-MB-E-3V 3	YHVP-MB-E-3V 4
Unit codes	0025251K	0025252K	0025253K	0025254K

Controls

WM-3V Wall control	9066642
JWC-T Wall control	9066630K
JWC-TQR Wall control	9066631K
T2T Wall control	9060174
T-MB Wall control (to be used with MB board only)	9066331E
RT03 infra-red remote control with receiver supplied with separate packaging (to be used with MB board only)	9025301
RT03 infra-red remote control supplied with separate packaging (to be used with MB board only)	3021203
Receiver for RT03 infra-red remote control supplied with separate packaging (to be used with MB board only)	9025300
PSM-DI Multifunction control (to be used with MB board only)	3021293
SEL-CVP Speed switch for controls: JWC-T and JWC-TQR	9025302
Electronic control accessories	
NTC low temperature cut-out thermostat for control JWC-TQR	3021090
TMM low temperature cut-out thermostat for control JWC-T	9053048
Change-Over CH 15-25 for control JWC-TQR	9053049
T2 Sensor (to be used as change-over or low temperature cut-out - for MB only)	9025310
Management system for a network of fan coils with MB electronic board	
Hardware / software supervisory system Net	9079118
Router-S for NET (default) or for BMS systems no provided by YORK	3021290
Relay output board SIOS	3021292

Codes high wall fan coil units YHVP-ECM

Unit without IR control without valve	YHVP-ECM 1	YHVP-ECM 2	YHVP-ECM 3	YHVP-ECM 4
Unit codes	0025501K	0025502K	0025503K	0025504K
Unit without IR control with 2 way valve	YHVP-ECM-2V 1	YHVP-ECM-2V 2	YHVP-ECM-2V 3	YHVP-ECM-2V 4
Unit codes	0025601K	0025602K	0025603K	0025604K
Unit without IR control with 3 way valve	YHVP-ECM-3V 1	YHVP-ECM-3V 2	YHVP-ECM-3V 3	YHVP-ECM-3V 4
Unit codes	0025701K	0025702K	0025703K	0025704K
Unit with IR control without valve	YHVP-ECM-T 1	YHVP-ECM-T 2	YHVP-ECM-T 3	YHVP-ECM-T 4
Unit codes	0025521K	0025522K	0025523K	0025524K
Unit with IR control with 2 way valve	YHVP-ECM-T-2V 1	YHVP-ECM-T-2V 2	YHVP-ECM-T-2V 3	YHVP-ECM-T-2V 4
Unit codes	0025621K	0025622K	0025623K	0025624K
Unit with IR control with 3 way valve	YHVP-ECM-T-3V 1	YHVP-ECM-T-3V 2	YHVP-ECM-T-3V 3	YHVP-ECM-T-3V 4
Unit codes	0025721K	0025722K	0025723K	0025724K
Unit with MB board without valve	YHVP-ECM-MB 1	YHVP-ECM-MB 2	YHVP-ECM-MB 3	YHVP-ECM-MB 4
Unit codes	0025511K	0025512K	0025513K	0025514K
Unit with MB board with 2 way valve	YHVP-ECM-MB-2V 1	YHVP-ECM-MB-2V 2	YHVP-ECM-MB-2V 3	YHVP-ECM-MB-2V 4
Unit codes	0025611K	0025612K	0025613K	0025614K
Unit with MB board with 3 way valve	YHVP-ECM-MB-3V 1	YHVP-ECM-MB-3V 2	YHVP-ECM-MB-3V 3	YHVP-ECM-MB-3V 4
Unit codes	0025711K	0025712K	0025713K	0025714K
Unit without IR control without valve with electrical coil	YHVP-ECM-E 1	YHVP-ECM-E 2	YHVP-ECM-E 3	YHVP-ECM-E 4
Unit codes	0025531K	0025532K	0025533K	0025534K
Unit without IR control with 2 way valve with electrical coil	YHVP-ECM-E-2V 1	YHVP-ECM-E-2V 2	YHVP-ECM-E-2V 3	YHVP-ECM-E-2V 4
Unit codes	0025631K	0025632K	0025633K	0025634K
Unit without IR control with 3 way valve with electrical coil	YHVP-ECM-E-3V 1	YHVP-ECM-E-3V 2	YHVP-ECM-E-3V 3	YHVP-ECM-E-3V 4
Unit codes	0025731K	0025732K	0025733K	0025734K
Unit with IR control without valve with electrical coil	YHVP-ECM-T-E 1	YHVP-ECM-T-E 2	YHVP-ECM-T-E 3	YHVP-ECM-T-E 4
Unit codes	0025541K	0025542K	0025543K	0025544K
Unit with IR control with 2 way valve with electrical coil	YHVP-ECM-T-E-2V 1	YHVP-ECM-T-E-2V 2	YHVP-ECM-T-E-2V 3	YHVP-ECM-T-E-2V 4
Unit codes	0025641K	0025642K	0025643K	0025644K
Unit with IR control with 3 way valve with electrical coil	YHVP-ECM-T-E-3V 1	YHVP-ECM-T-E-3V 2	YHVP-ECM-T-E-3V 3	YHVP-ECM-T-E-3V 4
Unit codes	0025741K	0025742K	0025743K	0025744K
Unit with MB board without valve with electrical coil	YHVP-ECM-MB-E 1	YHVP-ECM-MB-E 2	YHVP-ECM-MB-E 3	YHVP-ECM-MB-E 4
Unit codes	0025551K	0025552K	0025553K	0025554K
Unit with MB board with 2 way valve with electrical coil	YHVP-ECM-MB-E-2V 1	YHVP-ECM-MB-E-2V 2	YHVP-ECM-MB-E-2V 3	YHVP-ECM-MB-E-2V 4
Unit codes	0025651K	0025652K	0025653K	0025654K
Unit with MB board with 3 way valve with electrical coil	YHVP-ECM-MB-E-3V 1	YHVP-ECM-MB-E-3V 2	YHVP-ECM-MB-E-3V 3	YHVP-ECM-MB-E-3V 4
Unit codes	0025751K	0025752K	0025753K	0025754K

Controls

WM-S-ECM continuous fan speed control with S/W switch and liquid crystall display	9066644
T-MB Wall control (to be used with MB board only)	9066331E
RT03 infra-red remote control with receiver supplied with separate packaging (to be used with MB board only)	9025301
RT03 infra-red remote control supplied with separate packaging (to be used with MB board only)	3021203
Receiver for RT03 infra-red remote control supplied with separate packaging (to be used with MB board only)	9025300
PSM-DI Multifunction control (to be used with MB board only)	3021293
Electronic control accessories	
T2 Sensor (to be used as change-over or low temperature cut-out - for MB only)	9025310
Management system for a network of fan coils with MB electronic board	
Hardware / software supervisory system Net	9079118
Router-S for NET (default) or for BMS systems no provided by YORK	3021290
Relay output board SIOS	3021292

RVP-C Series

Circular VAV Terminal Boxes

A complete range from 37 m³/h to 12 842 m³/h



FX-PCV1630-1
Regulator with 8 physical points; 3UI, 3BO, 2CO; Integrated 4 Nm transducer and motor, 24 V AC power supply



NS-ATV7003-0
Room sensor for flow calibration
PCV Accessories (must be ordered separately)

FX-PCV1930-0
IP port controller for Bacnet IP communication (number 2) with 8 physical points; 3UI, 3BO, 2CO; Integrated 4 Nm transducer and motor, 24 V AC power supply.

VAV terminal boxes are capable of regulating and maintaining environmental comfort in a variable flow system by controlling the air flow in the best way.

This type of system allows you to control ventilation and air conditioning directly in rooms, according to the real flow needs and the cool-heat requirements.

This allows significant savings, especially in applications such as offices, classrooms and hotel rooms where there are large load differences during the various time intervals.

Features


- Continuous flow regulation according to the set point.
- Assembled with factory calibrated FX-CVM regulators
- High adjustment accuracy
- No maintenance required
- Possibility of use with constant or variable flow
- Master-slave mode
- BACnet and N2Open protocols
- Adjustment of maximum-minimum cold flow, hot flow and k factor from the bus probe equipped with display and parameter adjustment knob. It is not necessary to reach the regulator itself, just connect this device to the bus probe cable

VAV Controller, PCV

The PCV family controllers are equipped with the BACnet protocol in accordance with all ASHRAE specifications. They are equipped with SA Bus and with various input / output configurations.

The regulator includes the differential air pressure transducer to calculate the flow rate and the 4 Nm rotary motor to control the damper. This regulator has been designed for the regulation of VAV terminal boxes with variable flow.

- Support peer to peer communication
- PID control with self-adaptive calculation of the regulation parameters.
- Tested by BACnet Testing Labs (BTL)
- BACnet or N2open protocol selectable by software
- SA bus

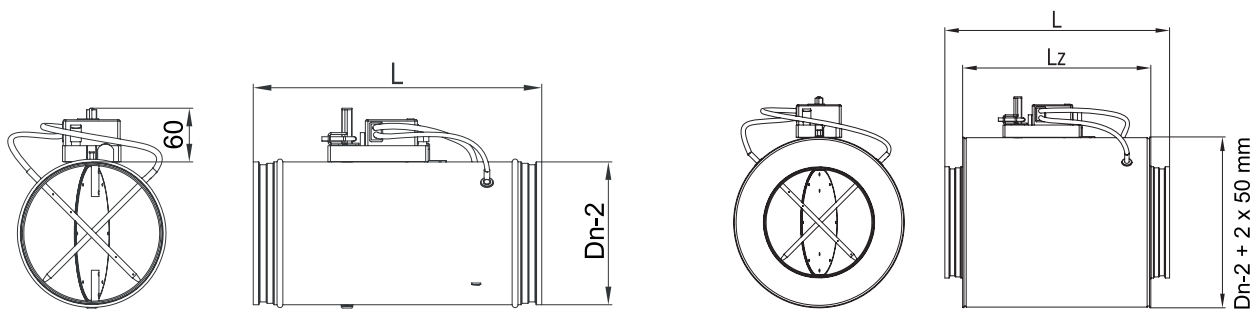

Special configurations

The isolated version is also available, increase the radius by ~ 50 mm

Dimensions Circular VAV

Model	Dn-2 [mm]	L [mm]	Volume min [m³/h]	Volume max [m³/h]
BPN-RVP-C-F100	100	400	37	343
BPN-RVP-C-F125	125	400	54	540
BPN-RVP-C-F160	160	400	90	900
BPN-RVP-C-F200	200	400	145	1459
BPN-RVP-C-F250	250	500	217	2215
BPN-RVP-C-F315	315	600	380	3680
BPN-RVP-C-F355	355	600	482	4275
BPN-RVP-C-F400	400	600	615	6047
BPN-RVP-C-F500	500	750	973	9484
BPN-RVP-C-F630	630	850	1435	12482

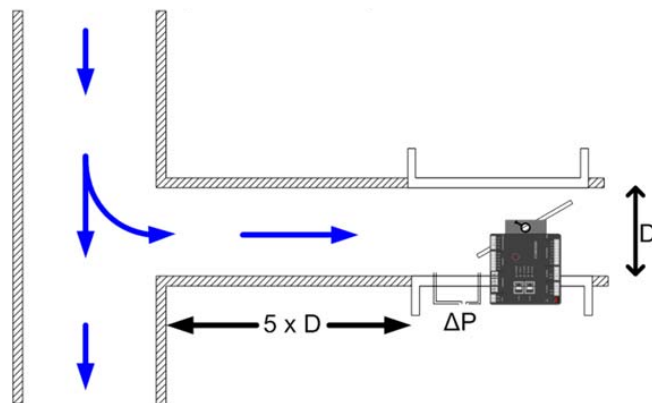
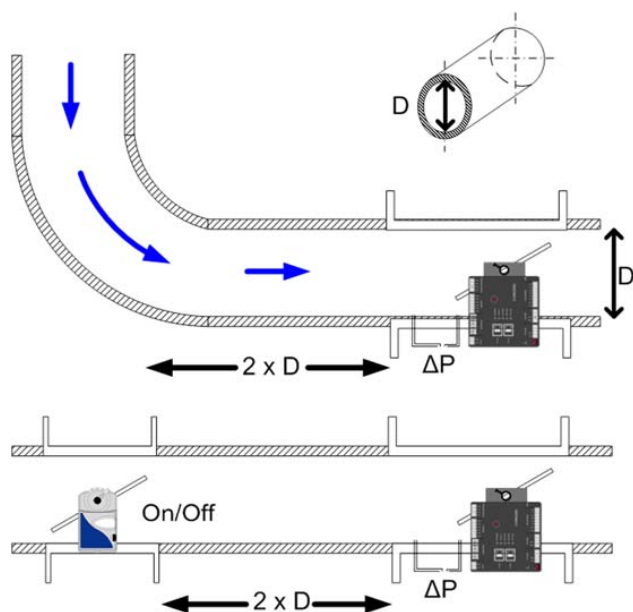


Table of order codes

BPN-RVP- C – F1x0 models

Code	BPN-RVP-C-F100	BPN-RVP-C-F125	BPN-RVP-C-F160
MS-PCV1630	BPN-RVP-C-F100-PCV1630	BPN-RVP-C-F125-PCV1630	BPN-RVP-C-F160-PCV1630

BPN-RVP- C – F2x0 models

Code	BPN-RVP-C-F200	BPN-RVP-C-F250
MS-PCV1630	BPN-RVP-C-F200-PCV1630	BPN-RVP-C-F250-PCV1630

BPN-RVP- C – F3x5 models

Code	BPN-RVP-C-F315	BPN-RVP-C-F355
MS-PCV1630	BPN-RVP-C-F315-PCV1630	BPN-RVP-C-F355-PCV1630

BPN-RVP- C – F400 models

Code	BPN-RVP-C-F400
MS-PCV1630	BPN-RVP-C-F400-PCV1630

BPN-RVP- C – F500 models

Code	BPN-RVP-C-F500
MS-PCV1630	BPN-RVP-C-F500-PCV1630

BPN-RVP- C – F630 models

Code	BPN-RVP-C-F630
MS-PCV1630	BPN-RVP-C-F630-PCV1630



Manufacturer reserves the rights to change specifications without prior notice.

RVP-P Series Rectangular VAV Terminal Boxes

A complete range from 130 m³/h to 36 000 m³/h



FX-PCV1630-1
Regulator with 8 physical points; 3UI, 3BO, 2CO; Integrated 4 Nm transducer and motor, 24 V AC power supply



NS-ATV7003-0
Room sensor for flow calibration
PCV Accessories (must be ordered separately)

FX-PCV1930-0
IP port controller for Bacnet IP communication (number 2) with 8 physical points; 3UI, 3BO, 2CO; Integrated 4 Nm transducer and motor, 24 V AC power supply.

VAV terminal boxes are capable of regulating and maintaining environmental comfort in a variable flow system by controlling the air flow in the best way.

This type of system allows you to control ventilation and air conditioning directly in rooms, according to the real flow needs and the cool-heat requirements.

This allows significant savings, especially in applications such as offices, classrooms and hotel rooms where there are large load differences during the various time intervals.

Features



- Continuous flow regulation according to the set point.
- Assembled with factory calibrated FX-CVM regulators
- High adjustment accuracy
- No maintenance required
- Possibility of use with constant or variable flow
- Master-slave mode
- BACnet and N2Open protocols
- Adjustment of maximum-minimum cold flow, hot flow and k factor from the bus probe equipped with display and parameter adjustment knob. It is not necessary to reach the regulator itself, just connect this device to the bus probe cable

VAV Controller, PCV

The PCV family controllers are equipped with the BACnet protocol in accordance with all ASHRAE specifications. They are equipped with SA Bus and with various input / output configurations.

The regulator includes the differential air pressure transducer to calculate the flow rate and the 4 Nm rotary motor to control the damper. This regulator has been designed for the regulation of VAV terminal boxes with variable flow.

- Support peer to peer communication
- PID control with self-adaptive calculation of the regulation parameters.
- Tested by BACnet Testing Labs (BTL)
- BACnet or N2open protocol selectable by software
- SA bus

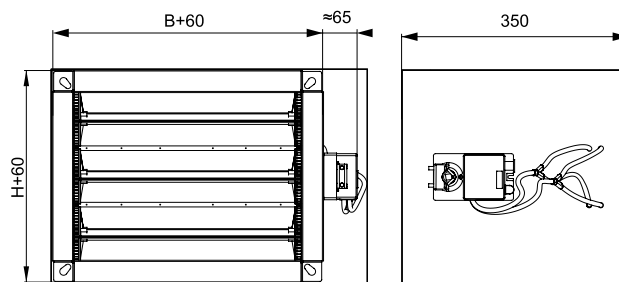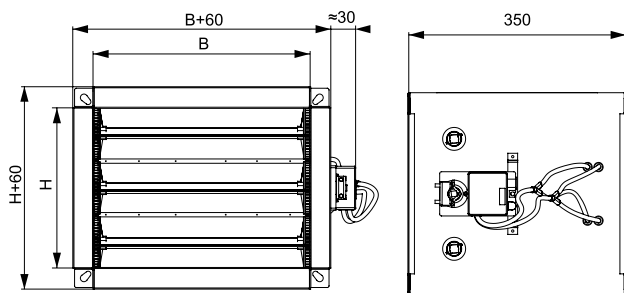

Special configurations

The isolated version is also available with ~ 60 mm thickness


Dimensions Rectangular VAV

Model	Dimensions	Volume min [m³/h]	Volume max [m³/h]
BPN-RVP-P-200x100	200 mm x 100 mm	130	720
BPN-RVP-P-300x100	300 mm x 100 mm	190	1080
BPN-RVP-P-400x100	400 mm x 100 mm	255	1440
BPN-RVP-P-500x100	500 mm x 100 mm	315	1800
BPN-RVP-P-600x100	600 mm x 100 mm	380	2160
BPN-RVP-P-200x200	200 mm x 200 mm	255	1440
BPN-RVP-P-300x200	300 mm x 200 mm	380	2160
BPN-RVP-P-400x200	400 mm x 200 mm	505	2880
BPN-RVP-P-500x200	500 mm x 200 mm	630	3600
BPN-RVP-P-600x200	600 mm x 200 mm	755	4320
BPN-RVP-P-700x200	700 mm x 200 mm	880	4320
BPN-RVP-P-800x200	800 mm x 200 mm	1005	5040
BPN-RVP-P-300x300	300 mm x 300 mm	570	3240
BPN-RVP-P-400x300	400 mm x 300 mm	755	4320
BPN-RVP-P-500x300	500 mm x 300 mm	940	5400
BPN-RVP-P-600x300	600 mm x 300 mm	1130	6480
BPN-RVP-P-700x300	700 mm x 300 mm	1320	7560
BPN-RVP-P-800x300	800 mm x 300 mm	1505	8640
BPN-RVP-P-900x300	900 mm x 300 mm	1695	9720
BPN-RVP-P-1000x300	1000 mm x 300 mm	1880	10800
BPN-RVP-P-400x400	400 mm x 400 mm	1005	5760
BPN-RVP-P-500x400	500 mm x 400 mm	1255	7200
BPN-RVP-P-600x400	600 mm x 400 mm	1505	8640
BPN-RVP-P-700x400	700 mm x 400 mm	1755	10080
BPN-RVP-P-800x400	800 mm x 400 mm	2005	11520
BPN-RVP-P-900x400	900 mm x 400 mm	2260	12960
BPN-RVP-P-1000x400	1000 mm x 400 mm	2510	14400
BPN-RVP-P-500x500	500 mm x 500 mm	1570	9000
BPN-RVP-P-600x500	600 mm x 500 mm	1880	10800
BPN-RVP-P-700x500	700 mm x 500 mm	2195	12600
BPN-RVP-P-800x500	800 mm x 500 mm	2510	14400
BPN-RVP-P-900x500	900 mm x 500 mm	2820	16200
BPN-RVP-P-1000x500	1000 mm x 500 mm	3135	18000
BPN-RVP-P-600x600	600 mm x 600 mm	2260	12960
BPN-RVP-P-700x600	700 mm x 600 mm	2635	15120
BPN-RVP-P-800x600	800 mm x 600 mm	3010	17280
BPN-RVP-P-900x600	900 mm x 600 mm	3385	19440
BPN-RVP-P-1000x600	1000 mm x 600 mm	3760	21600
BPN-RVP-P-700x700	700 mm x 700 mm	3070	17640
BPN-RVP-P-800x700	800 mm x 700 mm	3510	20160
BPN-RVP-P-900x700	900 mm x 700 mm	3950	22680
BPN-RVP-P-1000x700	1000 mm x 700 mm	4385	25200
BPN-RVP-P-800x800	800 mm x 800 mm	4010	23040
BPN-RVP-P-900x800	900 mm x 800 mm	4510	25920
BPN-RVP-P-1000x800	1000 mm x 800 mm	5015	28820
BPN-RVP-P-900x900	900 mm x 900 mm	5075	29160
BPN-RVP-P-1000x900	1000 mm x 900 mm	5640	32400
BPN-RVP-P-1000x1000	1000 mm x 1000 mm	6265	36000



Manufacturer reserves the rights to change specifications without prior notice.

Installation with duct from top to bottom

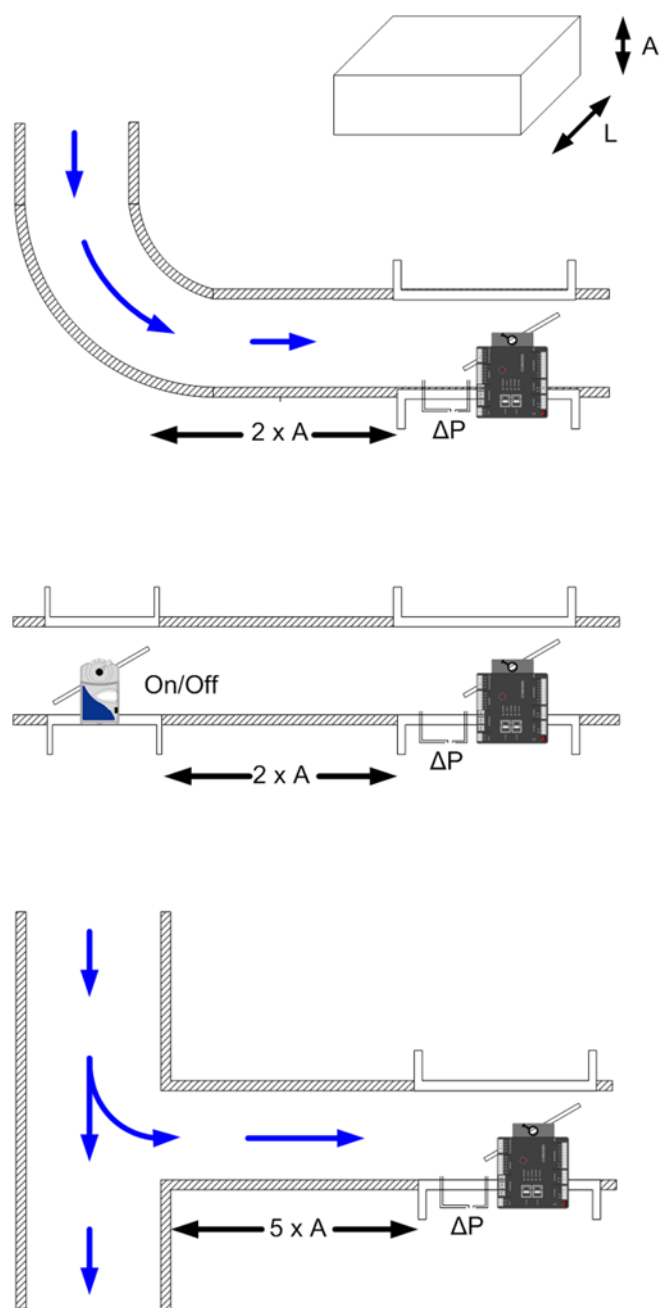

Flat duct installation

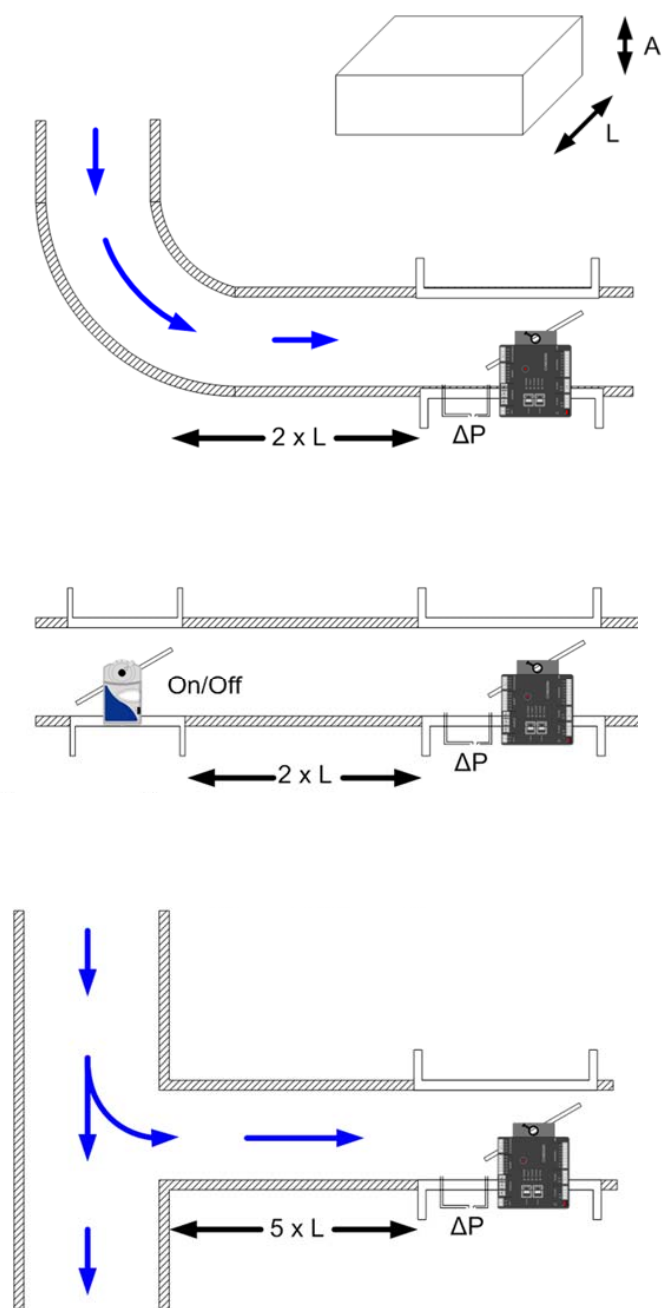


Table of order codes

BPN-RVP-Px00 x 100 models

Code	BPN-RVP-P-200x100	BPN-RVP-P-300x100	BPN-RVP-P-400x100
FX-PCV1630-1	BPN-RVP-P-200x100-PCV1630	BPN-RVP-P-300x100-PCV1630	BPN-RVP-P-400x100-PCV1630
Code	BPN-RVP-P-500x100	BPN-RVP-P-600x100	
FX-PCV1630-1	BPN-RVP-P-500x100-PCV1630	BPN-RVP-P-600x100-PCV1630	

BPN-RVP-Px00 x 200 models

Code	BPN-RVP-P-200x200	BPN-RVP-P-300x200	BPN-RVP-P-400x200
FX-PCV1630-1	BPN-RVP-P-200x200-PCV1630	BPN-RVP-P-300x200-PCV1630	BPN-RVP-P-400x200-PCV1630
Code	BPN-RVP-P-500x200	BPN-RVP-P-600x200	BPN-RVP-P-700x200
FX-PCV1630-1	BPN-RVP-P-500x200-PCV1630	BPN-RVP-P-600x200-PCV1630	BPN-RVP-P-700x200-PCV1630
Code	BPN-RVP-P-800x200		
FX-PCV1630-1	BPN-RVP-P-800x200-PCV1630		

BPN-RVP-Px00 x 300 models

Code	BPN-RVP-P-300x300	BPN-RVP-P-400x300	BPN-RVP-P-500x300
FX-PCV1630-1	BPN-RVP-P-300x300-PCV1630	BPN-RVP-P-400x300-PCV1630	BPN-RVP-P-500x300-PCV1630
Code	BPN-RVP-P-600x300	BPN-RVP-P-700x300	BPN-RVP-P-800x300
FX-PCV1630-1	BPN-RVP-P-600x300-PCV1630	BPN-RVP-P-700x300-PCV1630	BPN-RVP-P-800x300-PCV1630
Code	BPN-RVP-P-900x300	BPN-RVP-P-1000x300	
FX-PCV1630-1	BPN-RVP-P-900x300-PCV1630	BPN-RVP-P-1000x300-PCV1630	

BPN-RVP-Px00 x 400 models

Code	BPN-RVP-P-400x400	BPN-RVP-P-500x400	BPN-RVP-P-600x400
FX-PCV1630-1	BPN-RVP-P-400x400-PCV1630	BPN-RVP-P-500x400-PCV1630	BPN-RVP-P-600x400-PCV1630
Code	BPN-RVP-P-700x400	BPN-RVP-P-800x400	BPN-RVP-P-900x400
FX-PCV1630-1	BPN-RVP-P-700x400-PCV1630	BPN-RVP-P-800x400-PCV1630	BPN-RVP-P-900x400-PCV1630
Code	BPN-RVP-P-1000x400		
FX-PCV1630-1	BPN-RVP-P-1000x400-PCV1630		

BPN-RVP-Px00 x 500 models

Code	BPN-RVP-P-500x500	BPN-RVP-P-600x500	BPN-RVP-P-700x500
FX-PCV1630-1	BPN-RVP-P-500x500-PCV1630	BPN-RVP-P-600x500-PCV1630	BPN-RVP-P-700x500-PCV1630
Code	BPN-RVP-P-800x500	BPN-RVP-P-900x500	BPN-RVP-P-1000x500
FX-PCV1630-1	BPN-RVP-P-800x500-PCV1630	BPN-RVP-P-900x500-PCV1630	BPN-RVP-P-1000x500-PCV1630

BPN-RVP-Px00 x 600 models

Code	BPN-RVP-P-600x600	BPN-RVP-P-700x600	BPN-RVP-P-800x600
FX-PCV1630-1	BPN-RVP-P-600x600-PCV1630	BPN-RVP-P-700x600-PCV1630	BPN-RVP-P-800x600-PCV1630
Code	BPN-RVP-P-900x600	BPN-RVP-P-1000x600	
FX-PCV1630-1	BPN-RVP-P-900x600-PCV1630	BPN-RVP-P-1000x600-PCV1630	

BPN-RVP-Px00 x 700 models

Code	BPN-RVP-P-700x700	BPN-RVP-P-800x700	BPN-RVP-P-900x700
FX-PCV1630-1	BPN-RVP-P-700x700-PCV1630	BPN-RVP-P-800x700-PCV1630	BPN-RVP-P-900x700-PCV1630
Code	BPN-RVP-P-1000x700		
FX-PCV1630-1	BPN-RVP-P-1000x700-PCV1630		

BPN-RVP-Px00 x 800 models

Code	BPN-RVP-P-800x800	BPN-RVP-P-900x800	BPN-RVP-P-1000x800
FX-PCV1630-1	BPN-RVP-P-800x800-PCV1630	BPN-RVP-P-900x800-PCV1630	PN-RVP-P-1000x800-PCV1630

BPN-RVP-Px00 x 900 models

Code	BPN-RVP-P-900x900	BPN-RVP-P-1000x900
FX-PCV1630-1	BPN-RVP-P-900x900-PCV1630	BPN-RVP-P-1000x900-PCV1630

Modelli BPN-RVP-P- x00 x 1000 models

Code	BPN-RVP-P-1000x1000
FX-PCV1630-1	BPN-RVP-P-1000x1000-PCV1630

YEPR Heat Recovery Units

A complete range from 300 m³/h up to 2,600 m³/h



Introduction

The high-efficiency heat recovery units of the **YEPR** series have been designed to ensure energy savings in ventilation systems of public and private premises such as bars, restaurants, offices, shops, etc., making it possible to recover heat from the exhaust air and transferring it to the air released into the room.

The heat exchange between the exhaust air and the intake air takes place through a static heat exchanger with countercurrent flow, sized to obtain a heat recovery up to 94%.

The **YEPR** series includes 4 sizes suitable for horizontal installation and covers a range of flow rates from 300 to 2600 m³/h. The units are available both in the version for installation on ceilings and floors.

Construction features


The **YEPR** are supplied in 2 versions:

- for ceiling installation (**YEPR 1-C, YEPR 2-C, YEPR 3-C, YEPR 4-C**)
- for floor installation (**YEPR 1-F, YEPR 2-F, YEPR 3-F, YEPR 4-F**)

and they are equipped with centrifugal fans, featuring backward-inclined blades, and a continuous modulation electronic motor which ensure variable flow control, so as to reduce power consumption to the minimum necessary.


The YEPR units are ERP 2018 and therefore comply with the regulatory requirements of the European Ecodesign Directive (EU Regulation 1253/14). The checks concern both the energy performance relating to heat recovery and the intrinsic energy consumption parameter SFP_{int} in the nominal conditions declared by the manufacturer.

YEPR range

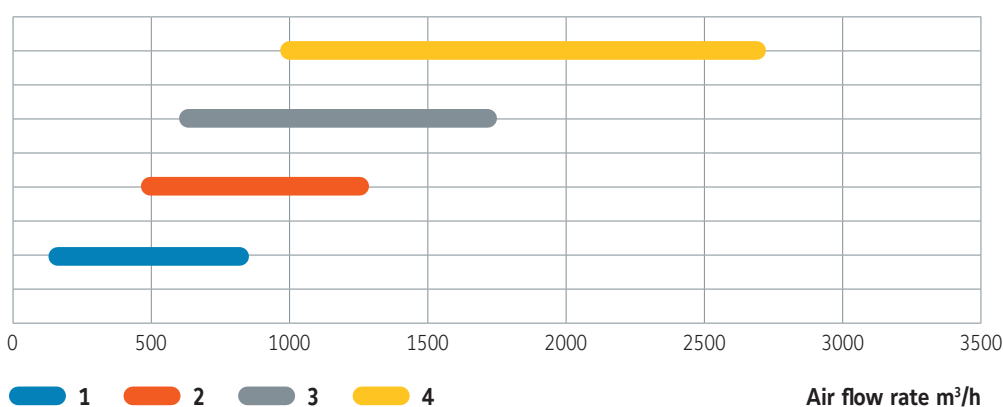

YEPR Heat Recovery Units

YEPR 1 to 4



Technical features

Model		YEPR 1	YEPR 2	YEPR 3	YEPR 4
Maximum supply and return air flow rate	m³/h	720	1150	1700	2600
	m³/h	0.20	0.32	0.47	0.72
Supply and return rated available static pressure	Pa	170	220	250	250
Minimum supply and return air flow rate	m³/h	270	300	600	690
Thermal efficiency EU regulation 1253/14 (1)	%	80	80	80	85
Total thermal output recovered (1)	kW	3.9	6.2	9.1	14.8
Maximum recovery efficiency (2)	%	90	90	90	94
Total thermal output recovered (2)	kW	6.5	10.5	15.4	24.5
Total number of fans	-	2	2	2	2
Rated absorbed electrical power (3)	W	330	770	1060	1460
Maximum total absorbed current (3)	A	2.8	3.4	4.7	6.5
Unit power supply (3)	V-Ph	230-1 + N / 50Hz	230-1 + N / 50Hz	230-1 + N / 50Hz	230-1 + N / 50Hz
Protection rating with machine installed	-	IP20	IP20	IP20	IP20
Unit weight	kg	90	140	170	320


1) Air conditions: EAT = 5°C and t_i = 25°C, no condensate

2) Air conditions: EAT = -10°C and t_i = 20°C, RH_i 50% RH

3) Basic version

Overall dimensions of the packaged unit

Model		YEPR 1	YEPR 2	YEPR 3	YEPR 4
Dimensions	D mm	469	510	595	735
	E mm	1845	1845	2245	2345
	F mm	1030	1030	1430	1880
Weight	kg	119	165	198	370

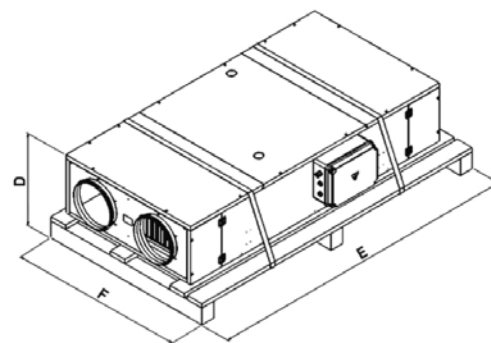

Thermal performances - Internal conditions: t_i = 20°C - RH_i = 50%

		EAT: 10°C			EAT: 5°C			EAT: 0°C			EAT: -5°C			EAT: -10°C		
Model	Q _v	P _h	ε _t	m _w	P _h	ε _t	m _w	P _h	ε _t	m _w	P _h	ε _t	m _w	P _h	ε _t	m _w
	m³/h	kW	%	kg/h	kW	%	kg/h	kW	%	kg/h	kW	%	kg/h	kW	%	kg/h
YEPR 1	100	0.30	90.4	0.00	0.46	90.5	0.15	0.62	91.7	0.26	0.79	94.3	0.36	0.97	96.5	0.44
	150	0.44	88.2	0.00	0.67	88.3	0.21	0.90	89.8	0.38	1.17	92.7	0.53	1.44	95.4	0.65
	300	0.85	84.6	0.00	1.28	84.7	0.42	1.74	86.4	0.72	2.26	90.0	1.03	2.81	93.2	1.25
	450	1.25	82.6	0.00	1.87	82.7	0.62	2.55	84.5	1.09	3.34	88.4	1.52	4.16	91.9	1.85
	600	1.63	81.2	0.00	2.45	81.3	0.81	3.35	83.2	1.43	4.39	87.3	2.01	5.49	90.9	2.47
	750	2.01	80.1	0.00	3.03	80.2	0.96	4.13	82.2	1.71	5.43	86.4	2.43	6.80	90.1	3.01
YEPR 2	200	0.60	89.4	0.00	0.90	89.5	0.29	1.22	90.8	0.51	1.57	93.5	0.70	1.93	96.0	0.86
	250	0.74	88.2	0.00	1.11	88.3	0.36	1.50	89.7	0.63	1.94	92.7	0.88	2.40	95.3	1.08
	500	1.42	84.6	0.00	2.13	84.7	0.69	2.90	86.4	1.20	3.77	90.0	1.72	4.69	93.2	2.08
	750	2.08	82.5	0.00	3.12	82.6	1.04	4.25	84.5	1.81	5.56	88.4	2.52	6.93	91.8	3.09
	1000	2.72	81.1	0.00	4.08	81.2	1.35	5.57	83.1	2.38	7.31	87.2	3.35	9.14	90.8	4.12
	1250	3.35	80.0	0.00	5.04	80.1	1.68	6.88	82.1	2.85	9.04	86.3	4.05	11.32	90.0	5.00
YEPR 3	300	0.89	88.4	0.00	1.34	88.5	0.43	1.81	89.9	0.76	2.34	92.9	1.06	2.88	95.5	1.31
	400	1.17	86.9	0.00	1.75	87.0	0.56	2.38	88.5	1.00	3.08	91.8	1.37	3.81	94.6	1.69
	800	2.24	83.4	0.00	3.36	83.5	1.10	4.57	85.2	1.91	5.97	89.0	2.66	7.44	92.4	3.36
	1200	3.27	81.4	0.00	4.92	81.5	1.64	6.71	83.4	2.88	8.79	87.4	3.90	10.99	91.0	4.97
	1650	4.42	79.8	0.00	6.63	79.9	2.20	9.06	81.9	3.88	11.91	86.1	5.31	14.92	89.9	6.57
	2000	5.29	78.9	0.00	7.95	79.0	2.53	10.87	81.0	4.54	14.31	85.4	6.49	17.95	89.2	8.05
YEPR 4	400	1.28	95.3	0.00	1.92	95.4	0.63	2.58	96.1	1.10	3.27	97.5	1.50	3.97	98.7	1.75
	550	1.72	93.5	0.00	2.59	93.6	0.84	3.49	94.5	1.49	4.44	96.4	1.98	5.42	98.0	2.43
	1100	3.31	89.7	0.00	4.97	89.8	1.61	6.72	91.1	2.82	8.65	93.8	3.89	10.64	96.1	4.74
	1700	4.98	87.4	0.00	7.48	87.5	2.45	10.14	89.0	4.34	13.13	92.1	5.87	16.23	94.9	7.25
	2300	6.62	85.8	0.00	9.94	85.9	3.22	13.50	87.5	5.77	17.53	90.9	7.90	21.74	93.9	9.83
	2900	8.23	84.6	0.00	12.36	84.7	4.02	16.81	86.4	6.97	21.88	90.0	9.99	27.19	93.2	12.09

t_i = Internal air temperature
 RH_i = Internal relative humidity
 EAT = External air temperature
 Q_v = Intake air flow rate
 Q_r = Return air flow rate
 P_h = Thermal recovery on the intake flow

ε_t = Recovery efficiency with balanced flow rates
 m_w = Condensate production
 b = Unbalance percentage
 ε_t* = Recovery efficiency with unbalanced flow rates
 F_t = Correction coefficient according to EAT variation
 F_q = Correction coefficient according to Q_v variation

$$\epsilon_t = \frac{2980 P_h}{Q_v (t_i - TAE)}$$

$$b = Q_r / Q_v$$

$$\epsilon_{t^*} = \epsilon_t \cdot b \cdot F_t \cdot F_q$$



Manufacturer reserves the rights to change specifications without prior notice.

YORK Close Control units

Maintaining a constant temperature, purity and humidity of air is essential for ensuring a stable environment for critical electronic and computer equipment, this is why there is the need for close control air conditioning. Unlike comfort air conditioning, close control systems must operate constantly 24/7 requiring high reliability and minimal power consumption. Johnson Controls knows that no two close control requirements are the same, this is why the YORK range of custom close control units offers quiet, compact and energy efficient equipment that can be configured to needed requirements.



An extensive offering

- cooling capacities of **up to 160kw (chilled water) or 94kw (direct expansion)** with optional free cooling models. Up flow or down flow configuration, either as self-contained packaged units or suitable for connection to remote condensers, are also available
- **optional direct expansion units** fitted with scroll compressors, which have much lower noise and energy consumption than reciprocating compressors
- **R410A** refrigerant units available
- optional **Free Cooling coil** to reduce energy consumption required through use of mechanical cooling
- plug fan with **Electronically Commuted 'EC' fans** option, to allow fully modulating control of airflow
- **low component face velocities**, for a lower total pressure drop and reduced energy consumption
- **minimised dimensions**, enabling one of the market's greatest ratios between sensible cooling capacity and base foot print



YORK YC-P Series Close Control Air Conditioners

A complete range from 8.0 kW up to 160.3 kW



High energy efficiency and minimum environmental impact

"P" Series air conditioners for close control applications are specialised machines with design and operating features which clearly differentiate them from standard air conditioning units.

The **"P" Series** air conditioners offer very high energy efficiency values in all operating conditions which translates into less CO₂ emissions and particularly low running costs. Though optimised for use in data centers and telephone exchanges, they are equally valid in special applications such as measurement laboratories, TV recording studios, museums, control rooms for electricity power stations and railway junctions and other areas where there are prevalent sensible thermal loads and crowding is negligible.

Their application is also ideal in widely varied industrial sectors: optics, electronics, electromedical equipment, electronic equipment production, musical instrument production etc.

Optimal efficiency

Johnson Controls' **"P" Series** design offers the highest sensible cooling capacity with the minimum footprint possible, which translates into optimal ratio levels of cooling capacity to footprint area. This is an important feature in reducing the space needed by machinery, allowing more room in the space for IT equipment. This advantage is especially important given the progressive increases in capacity required by data centers and other computer applications which, over time, need the addition of extra air conditioners.

Clean efficiency is also ensured by the use of the R410A refrigerant, respectful to the ozone layer.

Features and performance

Brushless DC compressors with inverter technology

- Adapting cooling capacity to the real requirements of the plant is one of the principal conditions of guaranteeing the flexibility required by the most advanced systems. By incorporating **BRUSHLESS DC INVERTER** technology into the compressors it is possible to maximize the performance of the motor, especially at partial loads, the control of which is integrated in the microprocessor.
- The cooling coils of the downflow units (**YC-UP**), both in chilled water and direct expansion versions, have aluminium fins with a hydrophylic treatment that alleviates the risk of condensation and the coil face being covered with water, which would compromise the thermal performance and therefore the air conditioning capacity.
- The use of the environmentally friendly refrigerant HFC R410A does not contribute to the depletion of the ozone layer.
- Thanks to its larger surface area, the filter on the coil allows lower face velocity, which results in lower pressure drop.
- The lower energy consumption of these air conditioners, at the same efficiency, results in a much reduced TEWI (Total Equivalent Warming Impact). The application of EC plug fans reduces both energy consumption and noise levels.

Microprocessor regulation

The Standard digital microprocessor

- allows management of all typical air-conditioning functions: cooling, heating, humidification, dehumidification and filtering
- ensures a regular and optimised operation as to both performance and consumption, providing as well alarm management and self-diagnosis.

Cooling circuit

The air conditioners with direct expansion coil have a frigorific circuit equipped with: scroll compressor with all necessary protective devices, high pressure (manual reset) and low pressure (automatic reset) switches, dehydrating filter with refrigerant sight glass.

YC-OPA, YC-UPA models for pairing with remote condensers, are already equipped with a pressurisation nitrogen charge. The refrigerant charge, and the oil top-up (if required), shall be made by the installer on site.

YC-OPA and **YC-UPA** air conditioners in self-contained packaged format with built-in water-cooled condensers (accessory), are supplied with full refrigerant and oil charge.

Local network management or remote control

YORK YC-P Series air conditioners are capable of standalone operation, local private network with multiple units (up to 12) or fully integrated with Metasys Building Management System from Johnson Controls.

The **YORK YC-P Series** are equipped with an innovative local network monitoring (LAN) system that simplifies management, simplifies maintenance, and optimizes operational safety.

The innovative smart net system allows to revolutionize the local network concept. In fact, taking advantage of the modulation capabilities of the components, this system allows you to actively share the workload between all units in the local network.

Thanks to the breakdown of the workload, it is possible to increase the efficiency of the system by partially requesting the main components such as fans, compressors, electric batteries and humidifiers.

This partitioning translates directly into energy savings of up to 60% compared to redundant networks. In fact, instead of having active units that work 100% of their performance while one (or more) machines are stationary, the smart net system allows the entire unit group to have 50 or 60% of their maximum workload.

In remote applications, the machines can be controlled from remote positions interfacing with common Building Management Protocols such as BacNET, LON and Modbus, either via GSM Modem or TCP/IP Internet Protocol.

For total integration with Johnson Control Metasys Building Management Systems (BMS) the units are equipped with an RS485 card working with BacNET MS/TP protocol.



Electronic expansion valve

Electronic expansion valves are one of the most recent pieces of equipment that enable us to improve the energy efficiency at partial loads of direct expansion machines. These valves are installed at the inlet of the evaporator, substituting the traditional thermostatic expansion ones: this allows more precise control of the quantity of refrigerant entering the evaporator, and guarantees good capacity regulation, typically between 100% and 50%. Electronic expansion valves also allows control of the amount of overheated gas at the outlet of the evaporator, thus allowing a significant reduction of the condensation pressure during winter or night-time operation whilst maintaining the evaporation pressure unchanged. Adoption of the electronic expansion valve (optional) guarantees a significant increase of the EER values.

One or two completely independent compressors

Models with "1" as the last digit of the unit model number have a single circuit and a single compressor. Those with "2" as the last digit on the other hand have two completely independent refrigerant circuits and two compressors.

The circuits are fitted with all the safety and regulation devices necessary for efficient and reliable operation.

The evaporator coil can be single or double circuit depending on the number of compressors.

Hydraulic circuit

Air conditioners with chilled water coil, **YC-OPU** and **YC-UPU**, include a finned coil and a three-way motorised valve for water flow regulation. The hydraulic circuit is provided with copper tubes. The coils are optimised for both water with a temperature of 7/12 and for higher ones such as 15/20.

Modulating regulation of the cooling capacity

If a very precise regulation and high response speed are required, a modulating valve is installed as standard. This valve is recommended in case of functionment with a lot of fresh air.

Control Panel

All the units are equipped with a complete control panel with main isolator switch. Magnetothermic switches, contactors, and all necessary protection is provided, as required by legal codes and standards.

The control panel of the units equipped with compressors ("A" as third letter of the identification code) has as standard a phase sequencer, which prevents the compressor from getting damaged when counter running. Also, the control panel has 4 configurable input and output for remote signalling, as well as two terminals for starting up and stopping the unit from remote position.

The condenser fan speed controller (accessory) is installed in the unit and controlled with a 0-10V signal from the microprocessor. All the control parameter are managed by the microprocessor.

The controller is valid for all the AC 230V motors.

EC fans control and power lines available as alternatives.



Modulating controller display and keypad

Large surface filters

The units are equipped with self-extinguishing media class G4 filters. The filters are installed inclined before the cooling coil in order to offer a larger surface and allow lower air crossing speeds, with lower energy consumption.

M5 or F7 filters ON COILS available as accessories.

Design suitable to civil environments

YORK YC-P Series air conditioners have a pleasant and functional design, suitable for installation in civil environments. Their structure consists of aluminium profiles and closing panels hinged on them. Both panels and profiles are epoxidic painting RAL 7024.

Two versions are available for up flow units (**YC-OP**): front grille & top air discharge (standard), or blind front panel, suction from the bottom and top discharge (optional).

Fan section

New generation of electronic fans

The ever-growing necessity to save energy has made the use of high-performance EC Plug Fans indispensable in reducing plant costs. The fans installed in **YC-P** close control air conditioners are fitted with **BRUSHLESS EC** (Electronically Commutated) **MOTORS** and a composite-material impeller to maximize performance.

Important advantages obtained as a result include:

- Power drawn by the fans is reduced by over 25% compared to fans using traditional AC technology.
- Power drawn by the fans is reduced by about 15% compared to the previous generation of EC fans.
- Noise levels are reduced by over 5 dB(A) at partial loads.
- Risk to the plant is reduced as the mechanical parts are subjected to less use.

Thanks to integration with the microprocessor, the EC fans can be controlled to:

- Reduce rotation speed and therefore air quantity as the cooling capacity requirement decreases, thus making possible a 50% energy saving, operating at partial loads, compared to a constant velocity system.
- Maintain constant air quantity controlled in real time by differential pressure sensors, optimal control if F7 filters are installed.
- Maintain constant air pressure in the raised floor or in the compartmented areas in order to optimize air distribution avoiding hot spots and guarantee maximum modularity of the plant plant.

Regulation Options

Johnson Controls provides four different alternatives for the regulation of the airflow of the EC fans depending on the requirements of the installation:

1. Constant fan rotation speed. The available high static pressure is ideal for most applications. The effective air flow depends on the real pressure drop of the aerodynamic system of the installation, however it can be calculated through Johnson Controls computerised selection program.
2. Constant airflow independent of the pressure drop of the system. In order to maintain a constant airflow, an internal sensor guides the microprocessor management system to vary the airflow handled by the fan, depending on the degree of the system. This ensures that insufficient cooling does not occur due to reduced airflow arising from dirty filters.
3. Variable airflow depending on the cooling capacity required by the installation. This is the classic VAV (Variable Air Volume) plant arrangement which responds to increased demand by a proportionate increase in airflow and vice versa. This type of plant offers interesting energy advantages at partial loads, which occur extensively throughout the year, especially at night.
4. Airflow as a function of pressure in the raised floor. This regulation alternative is envisaged for plants with raised floors where the air is distributed under the floor itself. The microprocessor management system maintains constant under-floor pressure. In particular, in very large areas subdivided into multiple local zones with partition dampers driven by individual thermostats, constant regulation of the pressure is necessary to avoid imbalances in the distribution of the air.


Downflow supply (UPA-UPU models)



Standard version with suction with upper air intake and downflow, with raised floor stand.




Suction with upper air intake and front air outlet with distribution plenum with adjustable grilles.

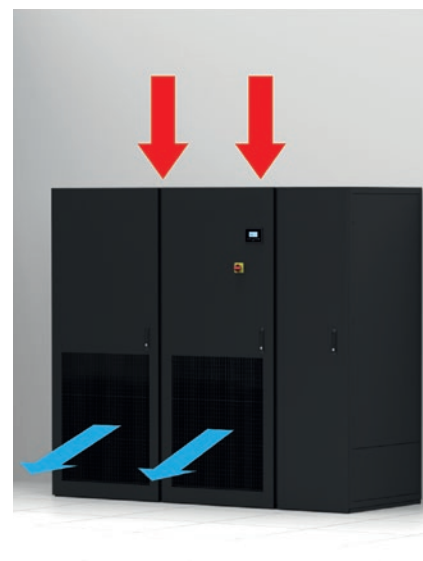

Suction with upper air intake and front air delivery with grid front panel.

Upflow supply (OPA-OPU models)

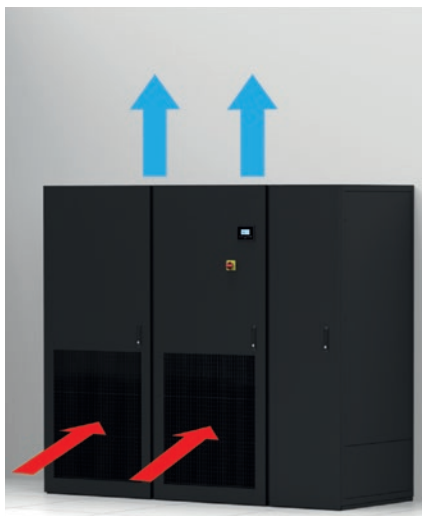

Standard version with front air intake and upflow air delivery.



Front air intake and front air outlet delivery with distribution plenum with adjustable grilles.



Bottom air intake with raised floor support, blind front panel and upflow air delivery.

Special versions

"Water to air free cooling": using renewable energy sources

YC-OPA.../FC, YC-UPA.../FC air conditioners are equipped with a "Free cooling" system consisting of an additional chilled-water cooling coil integrated in the aluminium fins of the unit's direct expansion one, with a three-way modulating valve controlled by the controller. As long as the outside conditions allow the water to respond totally or partially to the cooling request, the controller cuts out or minimises the compressors' intervention, so reducing substantially the energy consumption.

The water cooled condensers of the frigorific circuit are equipped with a pressostatic system for the regulation of the condensing pressure (flooding valves).

The pumps and the expansion tank are not included in Johnson Control's supply. The system widely uses the outdoor air—a renewable energy source—in lieu of or in addition to the mechanical cooling.

'Two Sources' option utilising excess energy from building HVAC systems

This system consists of the same chilled-water cooling coil as the "Free cooling", but fed by the building water chiller. A built in frigorific circuit enters in operation in case of lack of chilled water. The result is the maximum security or a remarkable reduction of both consumption and running costs. This system can also use the direct-expansion coil circuit as primary cooling source and, in case of an emergency, the chilled-water coil connected with the tap water network.

The "Two Sources" version is available for units with direct expansion circuit **YC-OPA.../TS, YC-UPA.../TS** as well as units with built in water cooled condenser (accessory) and with double chilled water coil **YC-OPU.../TS, YC-UPU.../TS**: one for district water and the other for tap water or water from a chiller (emergency).


Focus on Free Cooling

High energy saving air conditioning unit

Using renewable energy sources is required to reduce the environmental impact of systems. Our innovative free cooling systems are able to achieve energy savings of over 50% compared to a conventional air conditioner.

Free Cooling from renewable sources

Using **outside air to cool environments** is the primary source of energy savings available in temperate climate areas.

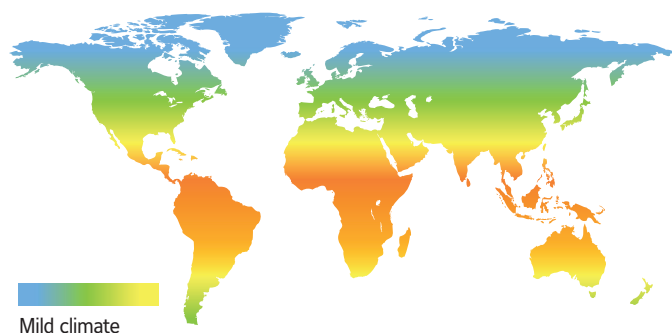

YORK can now offer a range of **FREE COOLING** close control air conditioning units which ensure high energy savings combined with the efficiency and reliability that distinguish this type of product.

Intelligent energy saving

The high number of hours per year in which **FREE COOLING** systems can be used ensures that the air conditioning system energy consumption can be **reduced by over 50%**.

This is reflected in an immediate environmental sustainability increase, thanks to a significant reduction in CO₂ emissions, and the system operating costs.

Free Cooling operating hours per year

	Amsterdam	Athens	Belgrade	Berlin	Brussels
Nbr. hours (1)	5,641	4,491	5,105	5,583	5,545
Percentage (2)	64%	51%	58%	64%	63%

	Bucharest	Budapest	Copenhagen	Dublin	Helsinki
Nbr. hours (1)	5,503	5,279	5,861	7,161	5,796
Percentage (2)	63%	60%	67%	82%	71%

	Istanbul	London	Madrid	Milan	Moscow
Nbr. hours (1)	4,779	5,575	4,643	5,281	6,046
Percentage (2)	55%	64%	53%	60%	71%

	Oslo	Paris	Prague	Reykjavik	Vienna
Nbr. hours (1)	6,202	5,187	5,619	7,743	5,651
Percentage (2)	73%	59%	64%	88%	65%

(1) Number of hours with temperatures lower than or equal to 18°C.

(2) Percentage calculated on a total of 8,760 hours per year.

Indirect Free Cooling


The **indirect FREE COOLING** system is characterised by a hybrid unit, consisting of a primary water circuit and a secondary direct expansion or chilled water circuit. The primary water circuit is connected to a dry cooler that uses outside air – a source of renewable energy – to cool water. The secondary circuit on the other hand exploits the mechanical cooling.

Optimised operating procedures

Depending on the outside air temperatures, three possible operating procedures are possible:


Total Free Cooling

The unit completely operates in **FREE COOLING** without triggering mechanical cooling.

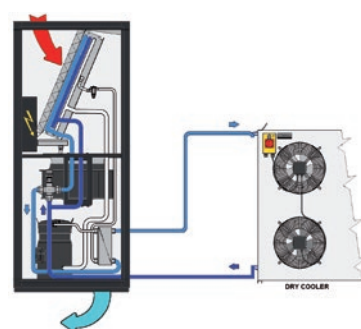


Partial Free Cooling

In addition to operating the **FREE COOLING** circuit, mechanical cooling can be triggered for the time strictly necessary to meet the demand for cooling.

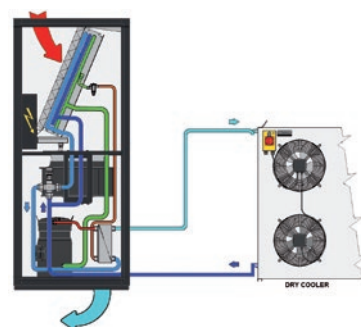

No Free Cooling

Regulation is completely entrusted to mechanical cooling, excluding the **FREE COOLING** circuit.

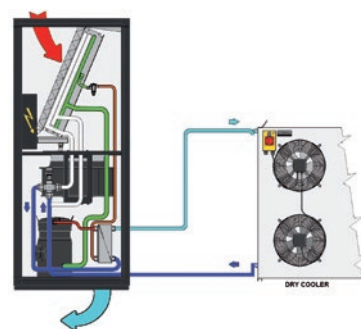

Self-adaptive set-point of the dry cooler

In order to maximise the efficiency of the **FREE COOLING** system, the unit can handle the regulation of the dry cooler coupled to it directly. **Thanks to the self-adaptive set-point function, the fan speed can be regulated so that the water always has a temperature consistent with the outside air conditions.**

This leads to an **increase in the system efficiency**, allowing you to maximise the performance of both the **FREE COOLING** circuit and the direct expansion circuit, ensuring low condensing temperatures. In addition, the fans of the dry cooler will partially operate even with high temperatures, thereby increasing the energy savings of the system.

Focus on Two Sources

Dual circuit system

Some critical applications often require safety devices that prevent discontinuity of operation due to system failure. To allow for such an eventuality, YORK can offer **"Two Source" systems provided with two totally independent cooling sources.**

High operational safety

In an air conditioning system, the main cooling source may be insufficient to guarantee suitable environmental conditions. This may be due to an overload of the system, maintenance, possible seasonal closures or any type of emergency that may arise.

A reduction in the machine cooling capacity can lead to great instability in the system, reducing the ability to control the system thermo-hygrometric conditions.


So as to avoid these problems, specific **TWO SOURCES (TS)** units have been developed providing a second source of cooling, complete with its own control valve and totally independent from the primary one.

A safe, flexible system

The Two Sources system is very flexible and allows three different types of systems:


Chilled water + direct expansion Two Sources

The chilled water primary source of the unit is connected to a building chiller or to District Cooling, whereas the secondary, emergency, and direct expansion one is connected to remote air or in-built water condensers.

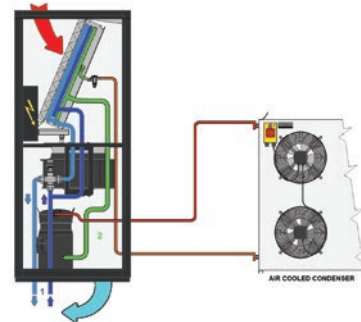

Direct expansion + chilled water Two Sources


The direct expansion primary source of the unit is connected to remote air or in-built water condensers, whereas the secondary, emergency, and water one is connected to a dedicated chiller, to a groundwater/aqueduct water distribution network or to District Cooling.

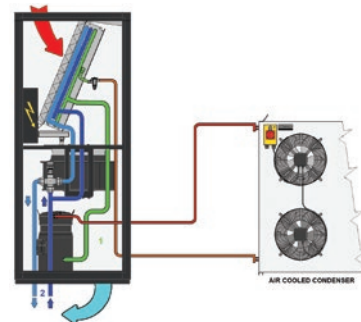

Chilled water + chilled water Two Sources

Both sources of the unit are chilled water coils. The primary one is normally connected to a building chiller or to District Cooling.

The emergency source can be connected to a dedicated chiller or a groundwater/aqueduct water distribution network.



Fittings and accessories

Numerous accessories and options are available for the **"P" Series** air conditioners to personalise the installation depending on the requirements of the plant and its design. Divided by function, they include:

Free cooling or two sources

- Additional Free cooling circuit.
- Additional Two sources circuit.

Alarms

- Water alarm (supplied loose).
- Out-of-range air discharge temperature alarm (standard).
- Smoke/fire alarm terminals (standard).

Water cooled condensers and pressostatic valves

- Welded stainless steel water cooled plate condenser.
- 2 way modulating valve (only if the water condenser is selected).

Sound proofing devices

- Sound damped duct for air suction or discharge (h=550 mm). Allows a reduction of approx 4 dB(A) of the SPL of the unit.

Panels and base

- Blind front panel (OP) and open base for bottom air intake.
- Front panel with grille in the lower part (UP) and closed base.

Plenum

- Plenum (h=550 mm) for air discharge or intake with adjustable grille.

Direct expansion unit cooling capacity regulation

- Electronic expansion valve (standard).
- INVERTER compressor available.

Heating, reheating and humidification

- Single-step or double-step low thermal inertia electrical heating/reheating coil.
- Immersed-electrode modulating humidifier and dehumidification control.
- Humidity sensor for the single control of dehumidification.
- Humidity sensor and control signal for external humidification control not supplied by Johnson Controls.

Boards and sensors

- RS 485 communication board.

Dampers

- Gravity-operated overpressure dampers on the air outlet (OP series).
- Motorised overpressure dampers on the air intake (UP series).

Under bases

- Adjustable under base (OP only).
- Adjustable under base with air deflector (UP only).

Fans and filters

- Electronic EC fans with incorporated inverter for constant rotation speed regulation (standard).
- Electronic EC fans with incorporated inverter for the regulation of air flow in relation to the required cooling capacity (standard).
- Electronic EC fans with incorporated inverter for the regulation of constant pressure in the raised floor.
- M5 or F7 on the COIL.
- Monophase condenser-fan rotation speed variator

Performance at JOHNSON CONTROLS test conditions*

Technical Characteristics

YC-OPA: direct expansion air conditioners with air cooled or water condensers and up-flow air supply														
Models		71	141	211	251	301	302	361	461	422	512	662	852	932
Performances														
Total cooling capacity	kW	8.0	14.8	21.4	26.4	33.2	31.1	37.9	47.9	43.7	54.7	68.9	86.8	94.4
Sensible cooling capacity	kW	7.6	13.1	21.4	25.7	32.0	31.1	37.9	47.4	43.7	53	66.9	75	85
EER		3.72	3.46	3.36	3.28	3.17	3.36	3.49	3.57	3.42	3.4	3.41	3.46	3.63
Airflow	m³/h	2.200	3.200	7.000	7.000	8.700	8.700	14.500	14.500	14.500	14.500	17.900	17.900	20.700
Sound pressure level	dB(A)	51	57	56	57	60	60	59	59	59	59	60	60	61
Dimensions & weight														
Lenght	mm	750	750	860	860	1.410	1.410	1.750	1.750	1.750	1.750	2.300	2.300	2.640
Depth	mm	601	601	880	880	880	880	880	880	880	880	880	880	880
Height	mm	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990
Net weight	kg	180	210	270	270	320	340	440	450	450	500	640	660	860
Free Cooling		○	○	○	○	●	●	○	○	○	○	●	●	○
Two Sources		○	○	●	○	●	●	○	○	○	○	●	●	○

* Performance refers to: R410A refrigerant; condensing temperature 45°C; incoming air 24°C-45%Rh; water 7/12°C; external static pressure 30 Pa. The declared performance does not take into account the heat generated by fans, which must be added to the system thermal load.

EER (Energy Efficiency Ratio) = total cooling capacity / compressors power consumption + fans power consumption (air cooled condensers excluded).

Sound levels at a 2 m distance, in a free field, as per UNI EN ISO 3744:2010.

Technical Characteristics

YC-UPA: direct expansion air conditioners with air cooled or water condensers and down-flow air supply														
Models		71	141	211	251	301	302	361	461	422	512	662	852	932
Performances														
Total cooling capacity	kW	8.0	14.8	21.4	26.4	33.2	31.1	37.9	47.9	43.7	54.7	68.3	86.8	94.4
Sensible cooling capacity	kW	7.6	13.1	21.4	25.7	32.0	31.1	37.9	47.4	43.7	53	66.9	75	85
EER		3.72	3.46	3.36	3.28	3.17	3.36	3.49	3.57	3.42	3.4	3.41	3.46	3.63
Airflow	m³/h	2.200	3.200	7.000	7.000	8.700	8.700	14.500	14.500	14.500	14.500	17.900	17.900	20.700
Sound pressure level	dB(A)	51	57	56	57	60	60	59	59	59	59	60	60	61
Dimensions & weight														
Lenght	mm	750	750	860	860	1.410	1.410	1.750	1.750	1.750	1.750	2.300	2.300	2.640
Depth	mm	601	601	880	880	880	880	880	880	880	880	880	880	880
Height	mm	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990
Net weight	kg	180	210	270	270	320	340	440	450	450	500	640	660	860
Free Cooling		○	○	○	○	●	●	○	○	○	○	●	●	○
Two Sources		○	○	●	○	●	●	○	○	○	○	●	●	○

* Performance refers to: R410A refrigerant; condensing temperature 45°C; incoming air 24°C-45%Rh; water 7/12°C; external static pressure 30 Pa. The declared performance does not take into account the heat generated by fans, which must be added to the system thermal load.

EER (Energy Efficiency Ratio) = total cooling capacity / compressors power consumption + fans power consumption (air cooled condensers excluded).

Sound levels at a 2 m distance, in a free field, as per UNI EN ISO 3744:2010.

Performance at JOHNSON CONTROLS test conditions*

Technical Characteristics

YC-OPU: with chilled water coil and up-flow air supply									
Models		10a	20a	30	50	80	110	160	220
Performances									
Total cooling capacity	kW	10.1	18.2	32.4	43.6	66.8	80.2	121.9	160.3
Sensible cooling capacity	kW	9.4	15.7	29.8	38	62	72	110	144
EER		36.07	33.09	27.93	24.36	27.83	28.04	27.09	28.02
Airflow	m³/h	2.200	3.200	7.400	8.200	15.400	17.000	26.000	34.000
Sound pressure level	dB(A)	51	57	58	61	60	61	63	64
Dimensions & weight									
Lenght	mm	750	750	860	860	1.750	1.750	2.640	3.495
Depth	mm	601	601	880	880	880	880	880	880
Height	mm	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990
Net weight	kg	155	160	220	240	340	360	540	700
Free Cooling		○	○	○	●	○	●	●	○
Two Sources		○	○	○	●	○	●	●	○

* Performance refers to: R410A refrigerant; condensing temperature 45°C; incoming air 24°C-45%Rh; water 7/12°C; external static pressure 30 Pa. The declared performance does not take into account the heat generated by fans, which must be added to the system thermal load.
 EER (Energy Efficiency Ratio) = total cooling capacity / compressors power consumption + fans power consumption (air cooled condensers excluded).
 Sound levels at a 2 m distance, in a free field, as per UNI EN ISO 3744:2010.

Technical Characteristics

YC-UPU: with chilled water coil and down-flow air supply									
Models		10	20	30	50	80	110	160	220
Performances									
Total cooling capacity	kW	10.1	19.2	32.4	43.6	66.8	80.2	121.9	160.3
Sensible cooling capacity	kW	9.4	15.7	29.8	38.1	62.1	72	109.7	144
EER		36.07	33.09	27.93	24.36	27.83	28.04	27.09	28.02
Airflow	m³/h	2.200	3.200	7.400	8.200	15.400	17.000	26.000	34.000
Sound pressure level	dB(A)	51	57	58	61	60	61	63	64
Dimensions & weight									
Lenght	mm	750	750	860	860	1.750	1.750	2.640	3.495
Depth	mm	601	601	880	880	880	880	880	880
Height	mm	1.990	1.990	1.990	1.990	1.990	1.990	1.990	1.990
Net weight	kg	155	160	220	240	340	360	540	700
Free Cooling		○	○	○	●	○	●	●	○
Two Sources		○	○	○	●	○	●	●	○

* Performance refers to: R410A refrigerant; condensing temperature 45°C; incoming air 24°C-45%Rh; water 7/12°C; external static pressure 30 Pa. The declared performance does not take into account the heat generated by fans, which must be added to the system thermal load.
 EER (Energy Efficiency Ratio) = total cooling capacity / compressors power consumption + fans power consumption (air cooled condensers excluded).
 Sound levels at a 2 m distance, in a free field, as per UNI EN ISO 3744:2010.

YORK YC-G Series Close Control Air Conditioners

A complete range from 43.3 kW up to 170.2 kW



Applications

"G" Series YORK air conditioners consist of a family of units specially designed to exploit the plant characteristics of the latest generation of large Data Centres.

In the design of air conditioning equipment for large Data Centres, the necessities of cable housing and for the distribution of the enormous quantities of air required to cool the servers have made it necessary to raise the height of the false floor to now reach the current 600–800 millimetres. This creates an ample space below the air conditioner destined to the installation of the plinth. This large space under the raised floor was therefore considered as the housing for the discharge fans. The air conditioners are supplied in two separate sections: the under-base containing the discharge fans to be installed under the floating floor, and the treatment unit with the exchanger coil, filters and the electrical panel.

This large space under the raised floor is used to house the supply air fans. The air conditioners are therefore supplied in two separate sections:

- The treatment unit with enlarged heat exchanger coil, filters and electrical panel.
- The plinth containing the supply air fans, to be installed under the raised floor. The plinth with the fans is supplied to match the height indicated in the order from the customer.

The two sections, shipped separately, are easy to install on-site as they require only electrical connection of the two junction boxes in the air conditioner and the plinth.

Downflow supply



Standard version for perimeteral installation inside the Data Centre: the height of the raised floor must be minimum 550 mm.



Version for perimeteral installation inside the Data Centre with raised floor height less than 550 mm. In this case, the plinth with fixed height of 550 mm is supplied with lateral closure panels and must be installed above the floor. It is essential to check that the height of the ceiling is sufficient to ensure good air suction.



Version for installation outside the Data Centre, without raised floor, rear air supply. In this case the plinth (fixed height 550 mm) is supplied with side closure panels and rear supply air grilles. Installation of the plenum with rear re-intake system is optional, if there is no ductwork.

Technical Characteristics

YC-UGA: direct expansion air conditioners with air-cooled or water-cooled condensers and downflow air supply				
Models		461	612	932
Total cooling capacity (1)	kW	50.6	63.4	95.6
Sensible cooling capacity (1)	kW	50.4	57	95.6
EER (2)		3.98	3.32	3.8
Airflow	m ³ /h	9.500	10.000	19.000
Sound pressure level (3)	dB(A)	57	58	59
Lenght	mm	1.490	1.490	2.390
Depth	mm	921	921	921
Height	mm	1.990	1.990	1.990
Net weight	kg	630	680	870

YC-UGU: chilled water coil air conditioners with downflow air supply					
Models		70	150	230	300
Total cooling capacity (1)	kW	43.3	85.1	123	170.2
Sensible cooling capacity (1)	kW	43.3	85.1	123	170.2
EER (2)		31.15	32.48	34.55	39.13
Airflow	m³/h	9.500	19.000	28.500	38.000
Sound pressure level (3)	dB(A)	57	59	61	60
Lenght	mm	1.320	2.220	3.120	4.020
Depth	mm	921	921	921	921
Height	mm	1.990	1.990	1.990	1.990
Net weight	kg	610	750	930	1.250

(1) Performance refers to: R410A refrigerant; condensing temperature 45°C; incoming air 32°C-30%Rh; water 15/20°C; external static pressure 30 Pa.

The declared performance does not take into account the heat generated by fans, which must be added to the system thermal load.

(2) EER (Energy Efficiency Ratio) = total cooling capacity / compressors power consumption + fans power consumption (air cooled condensers excluded).

(3) Sound levels at a 2 m distance, in a free field, as per UNI EN ISO 3744:2010.



Manufacturer reserves the rights to change specifications without prior notice.

YORK YC-R Series Close Control Air Conditioners

A complete range from 21.9 kW up to 36 kW



Applications

“R” Series YORK air conditioners consist of a family of units specially designed and constructed to have the same dimensions as the racks.

In the design of air conditioning plant for large Data Centres, the reduction of energy consumption is of ever increasing importance. For this reason the following concepts have become consolidated international standard practice:

- The racks containing the servers are more often positioned according to the “hot corridor aisle” and “cold corridor/aisle” layout.
- The working air temperatures are now allowed to go up to 30–35°C in the hot corridor and 20–25°C in the cold one, with very low humidity (never above 30%). Consequently, also the water temperature is allowed to rise up to 20–28°C, using the Free Cooling system to the best effect.
- Server capacities keep going up while their dimensions keep going down. This means that more servers can be installed in a rack so that some of these racks, remaining empty, can be removed. At the same time the heat dissipated rises and more capacity is required from the air conditioners.
- The servers work day and night albeit with a night time reduction of their capacity. It is therefore essential for the air conditioning installation to have an efficient modulating cooling capacity control and to be designed for minimum energy consumption and minimum environmental impact.

Horizontal supply



Version for in-row installation with front and lateral air supply.

Technical Characteristics

YC-HRA: direct expansion air conditioners with air-cooled or water-cooled condensers and horizontal air supply				
Models		231	361	
Total cooling capacity (1)	kW	21.9	35.1	
Sensible cooling capacity (1)	kW	21.8	33.9	
EER (2)		3.52	3.75	
Airflow	m³/h	6.000	6.800	
Sound pressure level (3)	dB(A)	52	54	
Length	mm	600	600	
Depth	mm	1.222	1.222	
Height	mm	1.985	1.985	
Net weight	kg	215	215	
Free Cooling		●	○	
Two Sources		●	○	

YC-HRU: chilled water coil air conditioners with horizontal air supply				
Models		20	40	
Total cooling capacity (1)	kW	24.1	36	
Sensible cooling capacity (1)	kW	24.1	36	
EER (2)		18.12	29	
Airflow	m³/h	6.000	9.000	
Sound pressure level (3)	dB(A)	56	61	
Length	mm	300	600	
Depth	mm	1.200	1.222	
Height	mm	1.970	1.985	
Net weight	kg	120	190	
Free Cooling		○	●	
Two Sources		○	●	

(1) Performance refers to: R410A refrigerant; condensing temperature 45°C; incoming air 32°C-30%Rh; water 15/20°C; external static pressure 30 Pa.

The declared performance does not take into account the heat generated by fans, which must be added to the system thermal load.

(2) EER (Energy Efficiency Ratio) = total cooling capacity / compressors power consumption + fans power consumption (air cooled condensers excluded).

(3) Sound levels at a 2 m distance, in a free field, as per UNI EN ISO 3744:2010.




Manufacturer reserves the rights to change specifications without prior notice.

Factory fitted controls

As the need for ever more connected buildings and controls grows, and the Internet of Things approaches, factory fitted controls from Johnson Controls offers control solutions that reduce cost, enhance quality and optimise commissioning time.

Once on site, the equipment can be started immediately. Commissioning time is dramatically reduced, allowing to better control the project costs through simplifying equipment installation and commissioning.

Quality is ensured through application and testing to European Installation regulations at the factory. Pre-installed software is configured to deliver air at the specified volume, temperature and humidity.

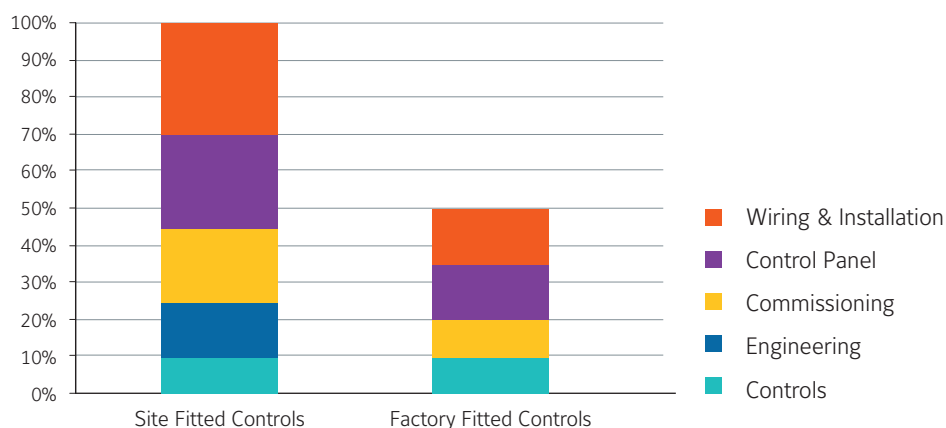

PLUG & PLAY EXPERIENCE



Factory fitted controls for YORK Air Handling units

The Air Handling Unit arrives on site **ready to connect** to the site network, and final commissioning is simplified through the unit's keypad and display.

Panel Power wiring, controls wiring, Variable Speed Drive, pre-engineered controller and required peripheral devices are all supplied, factory fitted and tested.



Factory fitted controls for YORK Fan Coil units


YORK Fan Coil Units are available with factory fitted controls and numerous options for controllers and valves **to allow reduced installation time on site.**

A range of standard configurable or fully programmable controllers are offered along with a choice of Industry standard protocols. Valve requirements can also be met with a wide range of modulating and on/off actuators and isolation valves available and factory fitted.



Factory fitted controls for YORK Rooftop & Close Control units

Factory fitted controls' solution enable, to **dramatically reduce on-site commissioning costs.** Both are delivered to site with pre-installed controls, factory tested and ready to apply the power.

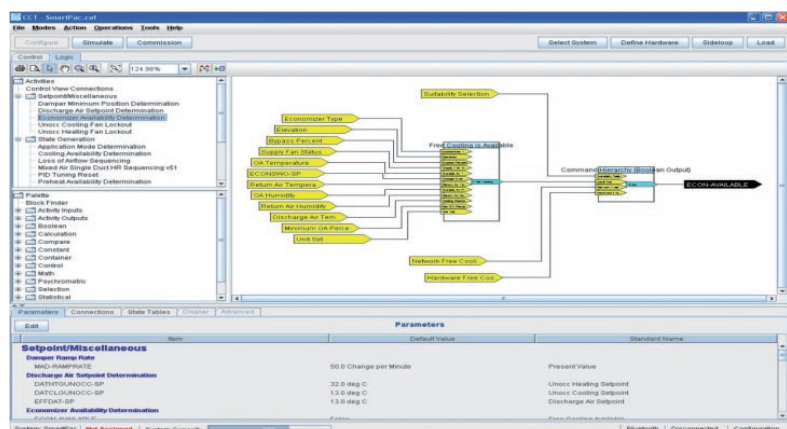

YORK Standard Control panel

Furthermore, Variable Speed Drives give **extra efficiency communicating** with the Johnson controller using industry standard protocols and providing for seamless communications with existing BAS control systems.

Advanced Control Made Easy

Comfort, productivity and up to half of the energy used in your building – these are all factors affected by how your chiller operates and how it interacts with other components in your HVAC&R system. To help maximize efficiency and keep you in control, some of our YORK Airside equipment is available with integrated SMART EQUIPMENT. This technology allows the equipment to connect seamlessly to building controls like our world-class Verasys system, where smart-enabled equipment can self-identify and interoperate. Verasys provides a truly plug-and-play experience, with no programming or commissioning tools required. Remote access over a secure internet connection and alarm notifications via email or text are

possible through Verasys. The user-friendly graphical interface provides easy access to critical equipment and facility information to help minimize the risk of unplanned downtime and costly repairs. Verasys also provides enhanced energy efficiency control, allowing a facility owner to potentially move from an average Class D efficiency classification to a Class A efficiency classification according to the EN 15232 standard. The key to this efficiency is demand control, where Verasys routes the energy requirements of a room or space to the heating and cooling equipment – matching the demand-side and the supply-side to provide greater overall energy efficiency.



Manufacturer reserves the rights to change specifications without prior notice.



✈ 登机 003-013 060-067
✈ 登机 023-043 005-098

003 013 014	005 006 007	019 020 021
023 024 025	027 028 029	031 032 033

Rooftop Equipment


Rooftop

Large Rooftop

Split Rooftop System

Control System

YKN2open



The YKN2open is a controller regulating all components and accessories. It will pro actively manage cool and heat stages to maintain a stable room temperature maximizing the efficiency.

Additionally, the benefits are:

- Redundancy on cool and heat stages (if one step is locked out, the PCB starts another one automatically).
- Random start between units to minimise electrical tariff.
- All stages will start in sequence to reduce peak inrush.
- Reduces nuisance calls by using 3 times "you are out" on all safeties before a hard lockout occurs.
- Automatic restart after power failure. Compressors run time priority.
- Alarm output relay and led diagnostic code. No parameters to check before starting.
- Lockout and incident level of protection. Last 10 lockouts stored in a non-volatile memory.
- 4 heating stages on hot water heating.
- **BMS connection (N2 Open protocol).**



YKtool N2open

The Yktool is the perfect tool to use on a regular basis for comissioning and service on site. For comissioning, it will override the thermostat and start the cooling or heating stages. Being a plug and play device, you will have direct access to all sensors and status of each components and accessories installed (lockout & incidents, temperatures, defrost test...).

Code: S613786031





Thermostat DPC-1


- Day (normal), night (economy) and unoccupied (stand by).
- Lockout code on screen gives direct diagnostics.
- ON/OFF or programmable from dip switch setting.
- Day or night programmable state avoids wide internal temperature variation.
- 3 preset and 3 programmable profiles.
- Temperature override.
- Select the control sensor you want to use (integrated in the thermostat, return air in duct or room sensor).
- Turbo, normal or economy logic from dip switch setting.
- From -3°C to +3°C sensor offset.
- Average temperature with room or duct sensors.

Thermostats with integrated sensors

Thermostat models		DPC-1	DPC-1R
	Code	S603786044	S603786045
Rooftop	All models	0	0
Rooftop Split	VIRSAH & VIRSAH	X	0

Main features			
Strategy	Turbo, normal or economy		
Auto restart after power failure	•		•
Number of cool stages	2	1	2
Number of heat stages	2	1	2
Auxiliary Heat	•		•
Automatic Heat/Cool change over	•		•
Continuous or auto indoor fan	•		•
Manual setback (Day/Night key)	Day, night and unoccupied		
Override possibility	•		•
Compressor anti short cycle	•		•
°C Range cooling / heating	10 to 32°C / 9 to 32°C		
Programmable, 7-day	•		•
Lockout codes	•		•
Outdoor air temperature	•	with YKN2open	
Sensor selection	•		•

X : Delivered as standard with the unit.
O : Optional. • : Function available.

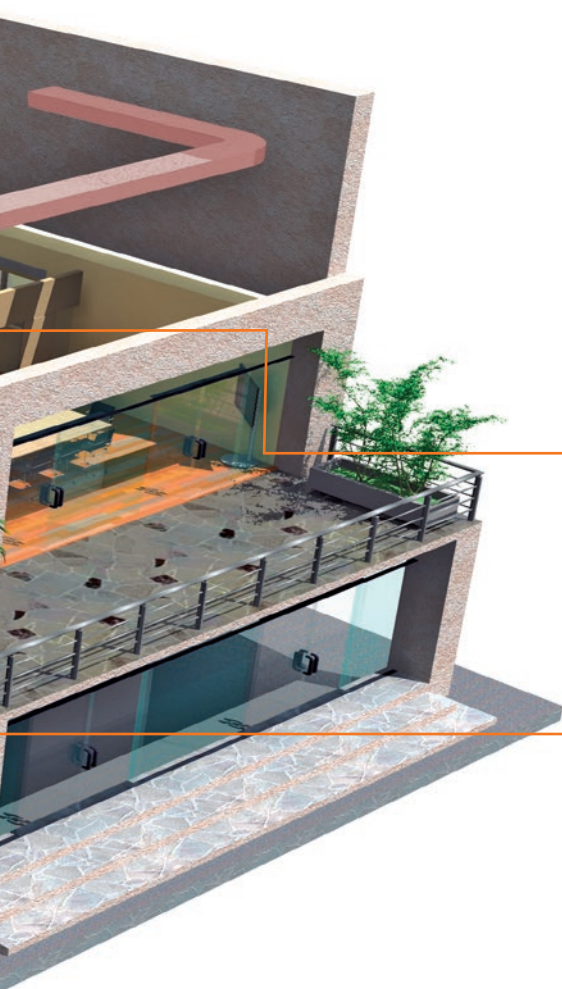

RS-1

Room sensor

Indoor remote probe to provide close control of the ambient temperature at a location away from the DPC-1 and DPC-1R thermostats.

Code: S603786042



AS-1

Ambiance sensor

Digital remote probe to provide close control of the ambient temperature at a location away from DPC-1 and DPC-1R thermostats. Up to 4 remote probes can be connected to make an average of the room conditioned.

Code: S603786049





DS-1

Duct sensor

Remote probe to provide close control of the return air temperature in the duct, at a location away from DPC-1 and DPC-1R thermostats. The use of this probe is recommended when an indoor remote probe cannot be installed in the area where temperature is to be controlled.



Code: S603786047



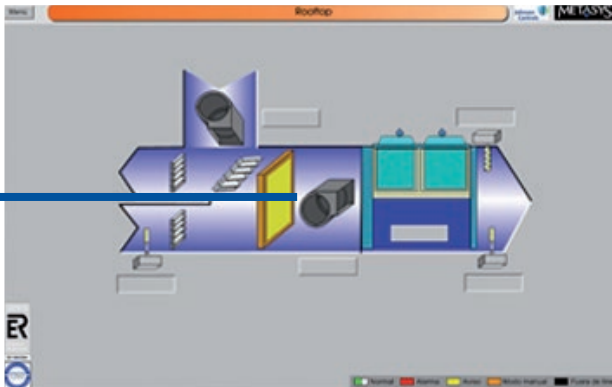

Sample screen

- BMS communication through new board YKN2open delivered as standard (N2open protocol)
- Possibility to fully control the unit and monitor more than 160 variables per unit.
- Can be integrated with other systems like lighting, fire&security or other HVAC equipment.
- Fully tailored solutions available (ask JCI sales office)

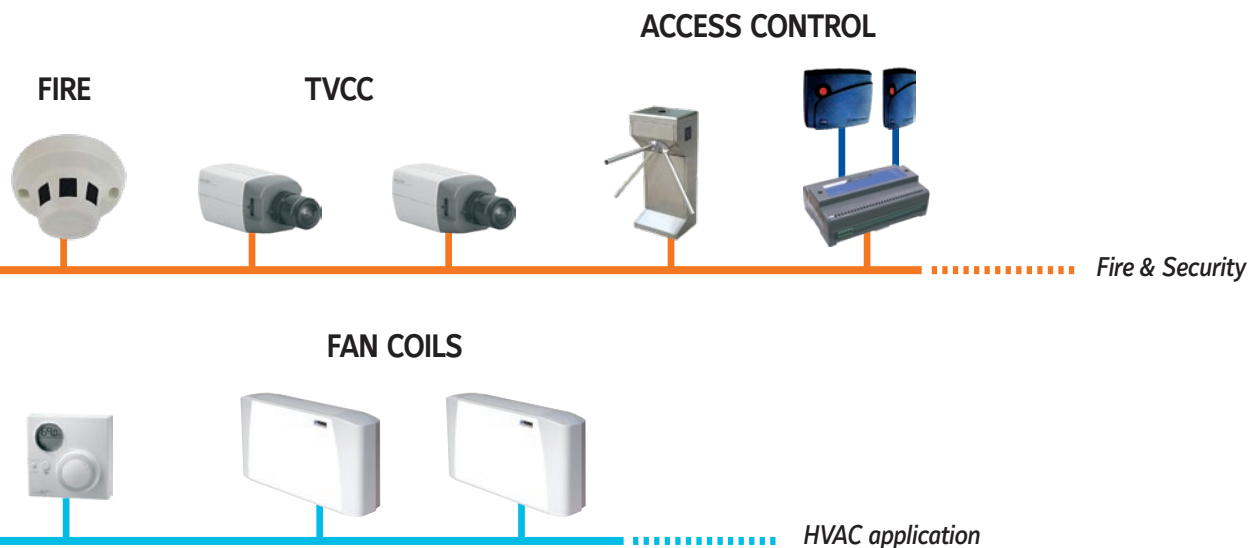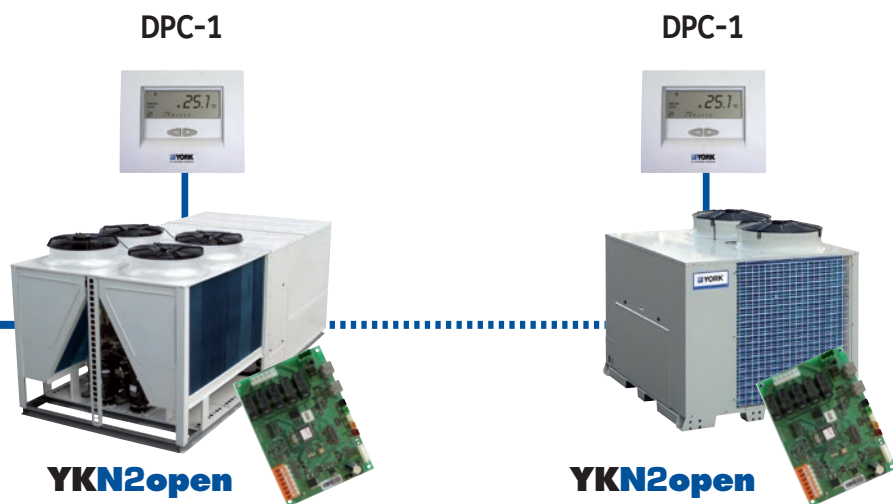

ACTIVA Rooftop

ARC-ARG-ARH-ARD

A complete range from 17 kW up to 40 kW



YKN2open

Features

- High efficiency EER and COP
- Ecodesign ErP 2018 compliant
- Low noise level
- EC supply fan
- All configurations: Cooling only, Cooling + gas, Heating, Heating + Gas
- BMS connection as standard (N2Open protocol)
- Compact design
- Energy recovery (enthalpy wheel)
- External HP & LP access
- Filters G4, F6 & F7 available

A R C 032 A B Nomenclature

- B = Blue fin
- C = Copper fin (ask JCI)
- A, B = version
- Capacity range:**
032 = 32 kW
- Product category:**
C = Cooling
H = Heat pump
G = Cooling & Gas
D = Heat pump & Gas (Dual)
- Rooftop
- Activa series

ACTIVA Rooftop

ARC-ARG-ARH-ARD 017 to 040 AB/BB



Technical features

Cooling only models			ARC 017 AB	ARC 022 AB	ARC 032 AB	ARC 040 AB
Net cooling capacities	kW		18.2	22.2	31	39.9
Power input	kW		5.5	7.4	9.9	14.2
SEER			3.82	3.85	4.06	3.28
ηs,c			149.6	151.1	159.4	128.1
Working range (full load / partial load)	°C		7°C ~ 46°C / -10°C ~ 52°C			
Heat pump models			ARH 017 BB	ARH 022 BB	ARH 032 AB	-
Net cooling capacities	kW		16.6	20.4	31	-
Power input in cooling	kW		5.9	7.3	9.9	-
Heating capacities (1)	kW		17.2	23.3	30.9	-
Power input in heating	kW		6.4	7.7	9.8	-
SCOP			2.96	2.96	2.96	-
ηs,h			115.2	115.2	115.3	-
Working range (full load / partial load)	°C		-10°C ~ 46°C / -10°C ~ 52°C			
Cooling only + Gas heating models			ARG 017 AB	ARG 022 AB	ARG 032 AB	ARG 040 AB
Net cooling capacities	kW		18.2	22.2	31	39.9
Cooling power input	kW		5.5	7.4	9.9	14.2
Standard Heating capacities (1) NET	kW		23	23	41	41
Natural gas 2ND-H, G20	m³/h		2.5	2.5	4.5	4.5
Working range (full load / partial load)	°C		-15°C ~ 46°C / -15°C ~ 52°C			
Heat pump + Gas heating models			ARD 017 BB	ARD 022 BB	ARD 032 AB	-
Net cooling capacities	kW		16.6	20.4	31	-
Power input in cooling	kW		5.9	7.3	9.9	-
Heating capacities (1)	kW		17.2	23.3	30.9	-
Power input in heating	kW		6.4	7.7	9.8	-
Standard Heating capacities (1) NET	kW		23	23	41	-
Natural gas 2ND-H, G20	m³/h		2.5	2.5	4.5	-
Working range (full load / partial load)	°C		-15°C ~ 46°C / -15°C ~ 52°C			
Common characteristics						
Power supply			400V/3 + N/ 50Hz			
Main switch	A		20	25	40	50
Main cable	Nbr. x mm²		5 x 4	5 x 6	5 x 10	5 x 16
Cable to thermostat	Nbr. x mm²		10 x 0.22			
Number of circuits / Compressor type			1 / 1 x Scroll		1 (Tandem) / 2 x Scroll	
Evaporator fan at nominal airflow	Airflow	m³/h	3400	4300	5700	7400
	ASP	Pa	600	600	600	600
Nett dimensions	Height	mm	1 420	1 420	1 420	1 420
	Length	mm	1 866	1 866	2 135	2 135
	Depth	mm	1 540	1 540	1 850	1 850
Nett weight ARC / ARG	kg		420 / 462	440 / 482	581 / 642	585 / 646
Nett weight ARH / ARD	kg		425 / 467	445 / 487	587 / 648	-

All the data are at EUROVENT conditions with 400V/3+N/50Hz.

Cooling : Entering indoor coil temp. 27°C / 19°C WB and outdoor temperature 35°C - Heating : Entering indoor coil temp. 20°C and outdoor temperature 7°C / 6°C WB

(1) Add indoor fan motor consumption to know total heating capacity.


Codes

Cooling only models	ARC 017 AB	ARC 022 AB	ARC 032 AB	ARC 040 AB
	S661752110	S661752120	S661752130	S661752150
Heat pump models	ARH 017 BB	ARH 022 BB	ARH 032 AB	-
	S661752513	S661752127	S661752133	-
Cooling only + Gas heating models	ARG 017 AB	ARG 022 AB	ARG 032 AB	ARG 040 AB
	S661752111	S661752121	S661752131	S661752151
Heat pump + Gas heating models	ARD 017 BB	ARD 022 BB	ARD 032 AB	-
	S661752118	S661752128	S661752132	-
Thermostat				
to be ordered separately			DPC-1	



Manufacturer reserves the rights to change specifications without prior notice.

Activa rooftop details & features

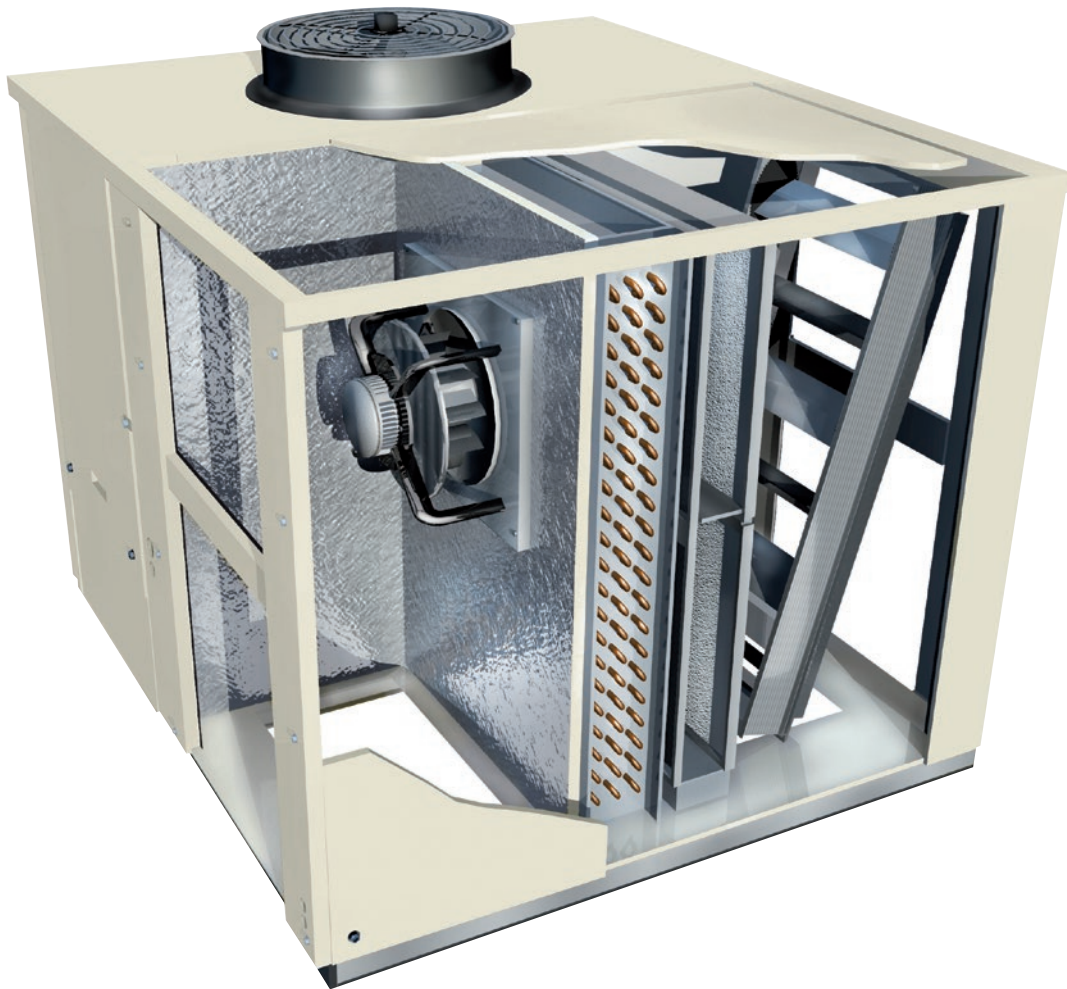


High Efficiency

High efficiency compressor and fans managed by an smart control allows the unit to achieve and maintain the level of comfort required in the most efficient way, reducing therefore the energy bill.



Low Noise

Ultra quiet fans and optimized airflow reduces the noise level increasing the comfort. Compressors are mounted on shock absorbers and anti-vibration springs are available to avoid vibration transmissions into de building.



Easy Installation and Maintenance

The high level of usability of the control, the internal solutions adopted (like direct driven fans with variable speed) and the easy access to components simplify and reduce the need of external interventions. Full information on commissioning and maintenance plan are provided to help to ensure unit keeps running always in optimal conditions.



Compact Design

The refrigerant circuit layout has been redesigned and high efficiency exchangers been used to reduce the footprint and improve the transport and handling. Transition roofcurbs are available to fit in existing installations.

Accessories & options

	Code	Cooling only				Heat pump			Cooling + gas heating				Heat pump + gas heating		
		017	022	032	040	017	022	032	017	022	032	040	017	022	032
Thermostat DPC-1	S603786044	A	A	A	A	A	A	A	A	A	A	A	A	A	A
YNK2Open Gateway BACnet / IP - JCI Metasys N2	S606791244	A	A	A	A	A	A	A	A	A	A	A	A	A	A
YNK2Open Gateway Modbus TCP / IP - JCI Metasys N2	S606791245	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Dry bulb triple input economizer or motorized air damper with rain hood	S611752301	O	O			O	O		O	O			O	O	
	S611752311			O	O			O			O	O			O
Enthalpy probes	S613990081	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Indoor air quality sensor	S606819964	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Power Exhaust	S611752302	A	A			A	A		A	A			A	A	
	S611752312			A	A			A			A	A			A
Barometric relief damper and rain hood	S611752472	A	A			A	A		A	A			A	A	
	S611752473			A	A			A			A	A			A
Fresh air damper and rain hood (2)	S611752303	A	A			A	A		A	A			A	A	
	S611752313			A	A			A			A	A			A
Low ambient kit	S611752381	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Roofcurb adapter (3)	S611752886	A	A			A	A		A	A			A	A	
	S611752887			A	A			A			A	A			A
Fixed roof curb	S611752881	A	A			A	A		A	A			A	A	
	S611752882			A	A			A			A	A			A
Adjustable roof curb	S611752883	A	A			A	A		A	A			A	A	
	S611752884			A	A			A			A	A			A
Dirty filter switch	S613990085	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Smoke detector	S613995382	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Fire detection thermostat	S613903003	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Hot water coil	S611752351	O	O			O	O								
	S611752352			O	O			O							
Electric heaters	16 kW	S611752516	O	O		O	O								
	16 kW	S611752616			O	O		O							
	25 kW	S611752525	O	O		O	O								
	25 kW	S611752625			O	O		O							
	37 kW	S611752537			O	O		O							
Propane conversion Kit	S611752780								A	A	A	A	A	A	A
Filter kit F6	S611752401	O	O			O	O		O	O			O	O	
	S611752402			O	O			O			O	O			O
Filter kit F7	S611752411	O	O			O	O		O	O			O	O	
	S611752412			O	O			O			O	O			O
Grill condenser coil protection	S611752451	O	O			O	O		O	O			O	O	
	S611752452			O	O			O			O	O			O
Antivibration mounting kit	S611752461	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Energy recovery	S611752501	A	A			A	A		A	A			A	A	
	S611752511			A	A			A			A	A			A
Filter kit F6 for energy recovery	S611755506	O	O			O	O		O	O			O	O	
	S611755516			O	O			O			O	O			O
Filter kit F7 for energy recovery	S611752507	O	O			O	O		O	O			O	O	
	S611752517			O	O			O			O	O			O
Alarm relay board	S606791243	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Copper-copper coil	Contact us	O	O	O	O	O	O	O	O	O	O	O	O	O	O

O=Option (factory fitted). A=Accessory (supplied loose). O/A=If you want this item factory fitted, precise it in the order form.

(1) Energy recovery accessory includes: economizer, rain hood, indoor air quality sensor and G4 filters.


(2) Fresh air damper can not be installed if economizer or motorized damper is fitted.

(3) Transition roofcurbs to fit in D_IC/D_IG/B_IG existing installations (090-150 kbtu/h).

ACTIVA Rooftop

ARC-ARG-ARH-ARD

A complete range from 48 kW up to 84 kW




YKN2open

Features

- High efficiency EER and COP
- Ecodesign ErP 2018 compliant
- Low noise level
- All configurations: Cooling only, Cooling + gas, Heating, Heating + Gas
- BMS communication as standard (N2Open protocol)
- Energy recovery (enthalpy wheel)
- EC Return fan
- External HP & LP access
- Filters G4, F6 & F7 available
- Tandem configuration (up to 52°C outdoor temperature)

A R C 045 B B Nomenclature

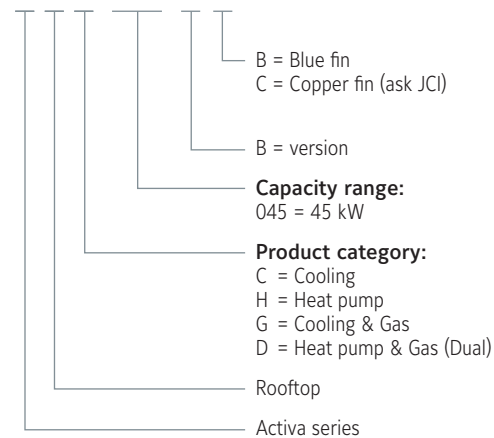

ACTIVA Rooftop

ARC-ARG-ARH-ARD 045 to 090 BB



Technical features

Cooling only models		ARC 045 BB	ARC 060 BB	ARC 075 BB	ARC 090 BB
Net cooling capacities	kW	48	62	75	83
Power input	kW	15.0	20.9	26.0	30.0
SEER		3.03	3,00	3.01	3.01
ηs,c		118.1	116.9	117.1	117.2
Working range (full load / partial load) *	°C	7°C ~ 46°C / -10°C ~ 52°C			
Heat pump models		ARH 045 BB	ARH 060 BB	ARH 075 BB	ARH 090 BB
Net cooling capacities	kW	48	62	72	84
Power input in cooling	kW	17.0	20.0	28.0	36.0
Heating capacities (1)	kW	45.2	58.0	71.7	86.5
Power input in heating	kW	16.0	19.0	27.0	33.0
SCOP		3.19	3.10	3.05	3.15
ηs,h		124.6	121.0	119.1	123.0
Working range (full load / partial load) *	°C	-10°C ~ 46°C / -10°C ~ 52°C			
Cooling only + Gas heating models		ARG 045 BB	ARG 060 BB	ARG 075 BB	ARG 090 BB
Net cooling capacities	kW	48	62	75	83
Cooling power input	kW	15.0	20.9	26.0	30.0
Standard Heating capacities (1)	kW	76.0	76.0	76.0	76.0
Natural gas 2ND-H, G20	m³/h	8.60	8.60	8.60	8.60
High Heating capacities (1)	kW	90.0	90.0	90.0	90.0
Natural gas 2ND-H, G20	m³/h	9.80	9.80	9.80	9.80
Working range (full load / partial load) **	°C	-15°C ~ 46°C / -15°C ~ 52°C			
Heat pump + Gas heating models		ARD 045 BB	ARD 060 BB	ARD 075 BB	ARD 090 BB
Net cooling capacities	kW	48	62	72	84
Cooling power input	kW	17.0	20.0	28.0	36.0
Heating capacities (1)	kW	45.2	58.0	71.7	86.5
Power input in heating	kW	16.0	19.0	27.0	33.0
Standard Heating capacities (1)	kW	76.0	76.0	76.0	76.0
Natural gas 2ND-H, G20	m³/h	8.60	8.60	8.60	8.60
High Heating capacities (1)	kW	90.0	90.0	90.0	90.0
Natural gas 2ND-H, G20	m³/h	9.80	9.80	9.80	9.80
Working range (full load / partial load) **	°C	-15°C ~ 46°C / -15°C ~ 52°C			
Common characteristics					
Power supply		400V/3 + N/ 50Hz			
Main switch	A	50	63	80	80
Main cable	Nbr. x mm²	5 x 10	5 x 16	5 x 25	5 x 25
Cable to thermostat	Nbr. x mm²	10 x 0.22			
Number of circuits / Compressor type		1 (tandem) / 2 x scroll		2 (tandem) / 4 x scroll	
Evaporator fan at nominal airflow	Airflow	m³/h	8 500	11 500	12 000
	Power input	kW	3	4	5.5
Nett dimensions	Height	mm	1 316	1 316	1 367
	Length	mm	3 180	3 180	3 750
	Depth	mm	2 337	2 337	2 337
Nett weight ARC / ARG		kg	900 / 1 010	945 / 1 055	1 118 / 1 228
Nett weight ARH / ARD		kg	930 / 1 040	985 / 1 095	1 145 / 1 255

All the data are at EUROVENT conditions with 400V/3+N/50Hz.

Cooling : Entering indoor coil temp. 27°C / 19°C WB and outdoor temperature 35°C - Heating : Entering indoor coil temp. 20°C and outdoor temperature 7°C / 6°C WB

(1) Add indoor fan motor consumption to know total heating capacity.

* With Premium kit (full load / partial load): -10°C ~ 50°C / -10°C ~ 52°C

** With Premium kit (full load / partial load): -20°C ~ 50°C / -20°C ~ 52°C

Codes

Cooling only models	ARC 045 BB	ARC 060 BB	ARC 075 BB	ARC 090 BB
	S661752149	S661752165	S661752175	S661752195
Heat pump models	ARH 045 BB	ARH 060 BB	ARH 075 BB	ARH 090 BB
	S661752147	S661752167	S661752177	S661752197
Cooling only + Gas heating models	ARG 045 BB	ARG 060 BB	ARG 075 BB	ARG 090 BB
	S661752146	S661752166	S661752176	S661752196
Heat pump + Gas heating models	ARD 045 BB	ARD 060 BB	ARD 075 BB	ARD 090 BB
	S661752148	S661752168	S661752178	S661752198
Thermostat				
to be ordered separately			DPC-1	



Manufacturer reserves the rights to change specifications without prior notice.

Activa rooftop details & features




Condenser fan

New condenser fans with high technology blades and outdoor bell that reduce the turbulences in the air and therefore increase the efficiency and improve the noise level performance.



Tandem scroll compressors

Tandem compressors configuration allows the unit to operate at partial load (only with one compressor) with higher efficiency and increases the working range up to +52°C ambient temperature.



PCB board

The YKN2Open board keeps same features and benefits as YKlon V3 and adds new logical to control the tandem circuit, the new options (heat recovery, return fan) and the possibility to communicate with BMS system as standard (only N2Open protocol).



PCB board



Return fan

Located in a special roof curb underneath the rooftop, it works simultaneously with the indoor fan in order to balance the amount of air supplied to and removed from the space. It is the best suited for systems with high return path static pressures. Also, incorporates EC technology and a differential pressure gauge to easy set up and maintain automatically the working point in the installation.


Energy recovery system

It is the preferred solution to solve two conflicting requirements: reduce running costs (increase efficiency) while maintaining the indoor air quality at high levels (through ventilation).

An enthalpy rotary wheel retains the energy from the exhaust air and transmits it to the fresh air stream that is being supplied in the conditioned space.


The material used is manufactured with the latest technology to increase the energy transmission in both sensible and latent heat.

The wheel is split into 6 portions that can be easily removed for cleaning.

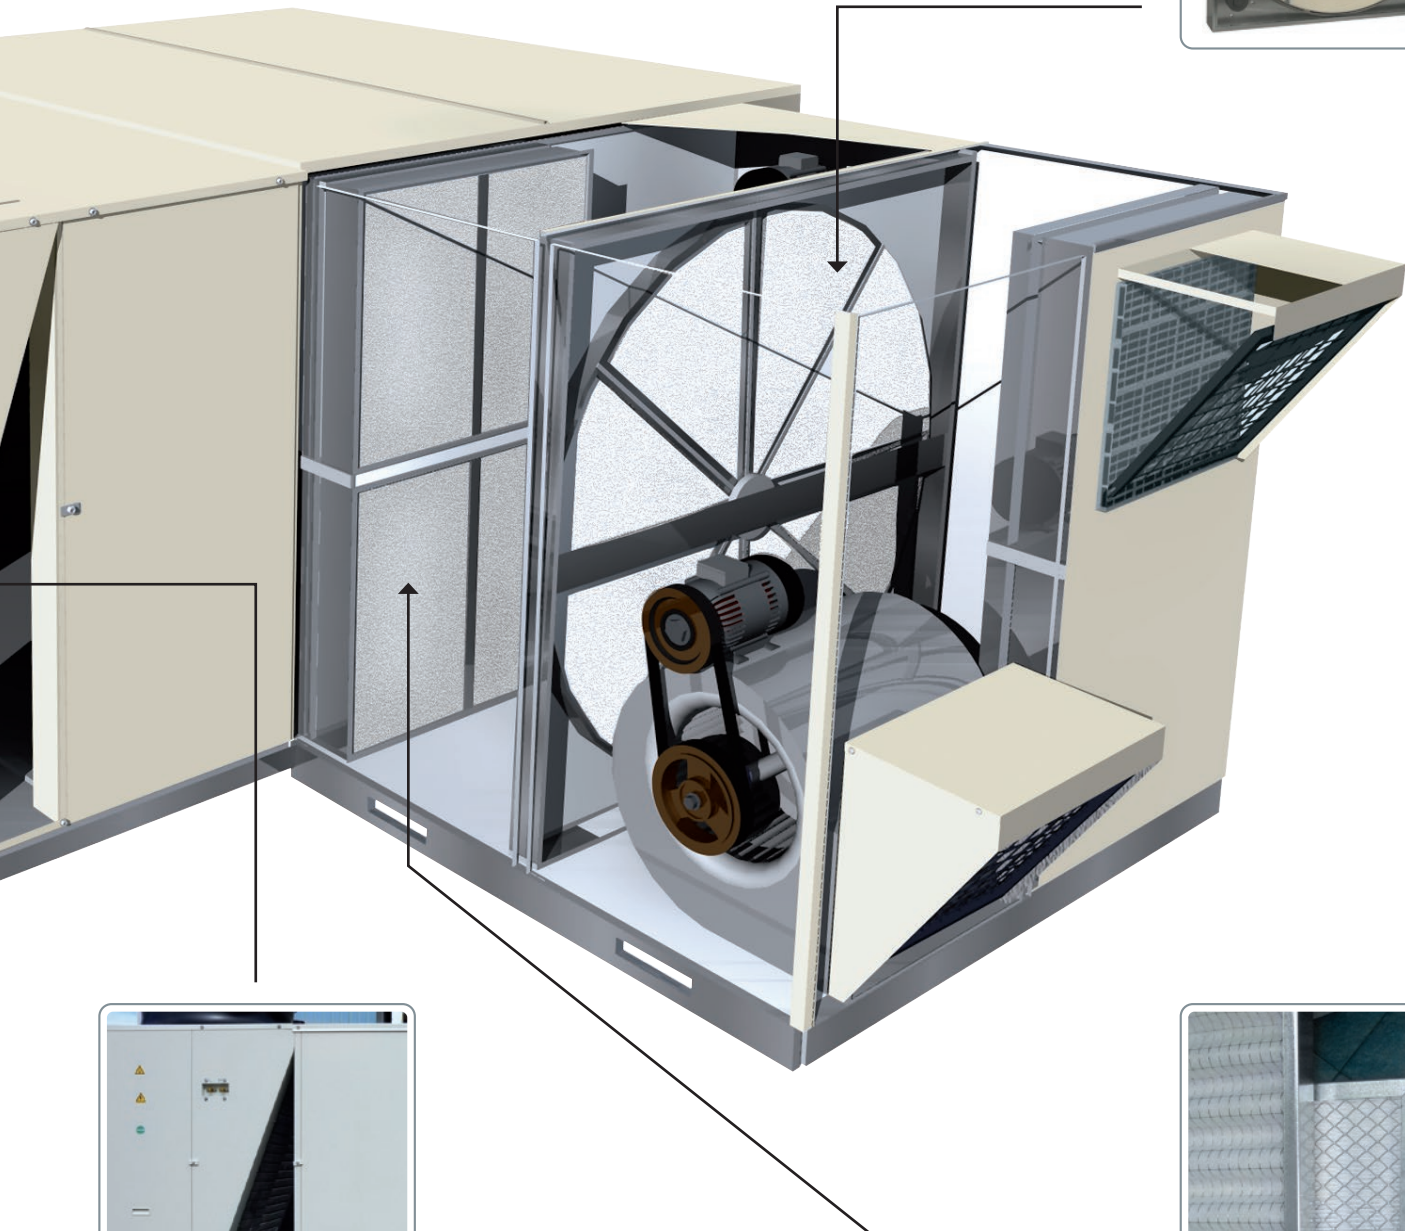

V-Coils

Made in blue fin (or in copper for harsh conditions under special request), increases the heat exchange surface for a given rooftop footprint. The floor pan is sloped for easy condensates drainage.



Filter options

Washable air filters: G4 class filter (gravimetric efficiency above 90%) and M1 fire class, it comes with galvanized sheet metal frame that allows easy cleaning and replacement. Delivered as standard.

Filter kit F6: for Average Opacimetric efficiency (em) $60\% \leq em \leq 80\%$

Filter kit F7: for Average Opacimetric efficiency (em) $80\% \leq em \leq 90\%$

As per EN 779

Accessories & options

Accessories & options

		Code	Cooling only				Heat pump			
			45	60	75	90	45	60	75	90
Thermostat DPC-1		S603786044	A	A	A	A	A	A	A	A
YNK2Open Gateway BACnet / IP - JCI Metasys N2		S606791244	A	A	A	A	A	A	A	A
YNK2Open Gateway Modbus TCP / IP - JCI Metasys N2		S606791245	A	A	A	A	A	A	A	A
Dry bulb triple input economizer or motorized air damper with rain hood		S661752301	O	O			O	O		
		S661752311			O	O			O	O
Enthalpy probes		S613990081	O	O	O	O	O	O	O	O
Indoor air quality sensor		S606819964	A	A	A	A	A	A	A	A
Power Exhaust		S661752302	A	A			A	A		
		S661752322			A	A			A	A
Barometric relief damper and rain hood		S613990472	A	A			A	A		
		S613990473			A	A			A	A
Fresh air damper and rain hood (2)		S661752303	A	A			A	A		
		S661752323			A	A			A	A
High pressure drive	4 kW	S611990401	O				O			
	5.5 kW	S611990601		O				O		
	7.5 kW (IE3)	S611990701			O				O	
	7.5 kW (IE3)	S611990702				O				O
	11 kW (IE3)	S611990903				O				O
Soft start indoor fan	5.5 kW	S606744690	O	O	O	O	O	O	O	O
	11.5 kW	S606744691			O	O			O	O
Premium Kit (LAK included) *		S613118302	O	O			O	O		
		S613118304			O				O	
Side duct flanges		S613991482	A	A			A	A		
		S613991483			A	A			A	A
Fixed roof curb		S613991884	A	A			A	A		
		S613991885			A	A			A	A
Adjustable roof curb		S613992081	A	A			A	A		
		S613992082			A	A			A	A
Dirty filter switch		S613990085	O	O	O	O	O	O	O	O
Smoke detector		S613995382	O	O	O	O	O	O	O	O
Fire detection thermostat		S613903003	O	O	O	O	O	O	O	O
Hot water coil		S611083351	O	O	O	O	O	O	O	O
Electric heaters	12 kW	S611761584	O	O	O	O	O	O	O	O
	25 kW	S611762284	O	O	O	O	O	O	O	O
	37 kW	S611763385	O	O	O	O	O	O	O	O
	50 kW	S611764485	O	O	O	O	O	O	O	O
Propane conversion Kit		S611801780	A	A	A	A	A	A	A	A
High heat gas conversion kit		S611803080	O	O	O	O	O	O	O	O
Filter kit F6		S611300401	O	O			O	O		
		S611300701			O				O	
		S611300901				O				O
Filter kit F7		S611300402	O	O			O	O		
		S611300702			O				O	
		S611300902				O				O
Grill condenser coil protection		S661752304	O				O			
		S661752324		O				O		
		S661752314			O	O			O	O
Antivibration mounting kit		S613990411	A	A	A	A	A	A	A	A
Return fan bottom duct		S613993042	A	A			A	A		
		S613993072			A	A			A	A
Energy recovery	Q6000 (1)	S611994511	A	A			A	A		
	Q3000 (1)	S611994512	A	A			A	A		
	Q9000 (1)	S611997511			A	A			A	A
	Q4500 (1)	S611997512			A	A			A	A
Filter kit F6 for energy recovery		S611994506	O	O			O	O		
		S611997506			O	O			O	O
Filter kit F7 for energy recovery		S611994507	O	O			O	O		
		S611997507			O	O			O	O
Alarm relay board		S606791243	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Copper-copper coil		Contact us	O	O	O	O	O	O	O	O

O=Option (factory fitted). A=Accessory (supplied loose). O/A=If you want this item factory fitted, precise it in the order form.

(1) = Energy recovery accessory includes: economizer, rain hood, indoor air quality sensor and G4 filters.

(2) Fresh air damper can not be installed if economizer or motorized damper is fitted.

* Features: increased efficiency by 0.15, extended max outdoor temperature up to +50°C at full load, Low ambient kit.



Accessories & options

		Code	Cooling + gas heating				Heat pump + gas heating			
			45	60	75	90	45	60	75	90
Thermostat DPC-1		S603786044	A	A	A	A	A	A	A	A
YNK2Open Gateway BACnet / IP - JCI Metasys N2		S606791244	A	A	A	A	A	A	A	A
YNK2Open Gateway Modbus TCP / IP - JCI Metasys N2		S606791245	A	A	A	A	A	A	A	A
Dry bulb triple input economizer or motorized air damper with rain hood		S661752301	O	O			O	O		
		S661752311			O	O			O	O
Enthalpy probes		S613990081	O	O	O	O	O	O	O	O
Indoor air quality sensor		S606819964	A	A	A	A	A	A	A	A
Power Exhaust		S661752302	A	A			A	A		
		S661752322			A	A			A	A
Barometric relief damper and rain hood		S613990472	A	A			A	A		
		S613990473			A	A			A	A
Fresh air damper and rain hood (2)		S661752303	A	A			A	A		
		S661752323			A	A			A	A
High pressure drive	4 kW	S611990401	O				O			
	5.5 kW	S611990601		O				O		
	7.5 kW (IE3)	S611990701			O				O	
	7.5 kW (IE3)	S611990702				O				O
	11 kW (IE3)	S611990903				O				O
Soft start indoor fan	5.5 kW	S606744690	O	O	O	O	O	O	O	O
	11.5 kW	S606744691			O	O			O	O
Premium Kit (LAK included) *		S613118302	O	O			O	O		
		S613118304			O				O	
Side duct flanges		S613991482	A	A			A	A		
		S613991483			A	A			A	A
Fixed roof curb		S613991884	A	A			A	A		
		S613991885			A	A			A	A
Adjustable roof curb		S613992081	A	A			A	A		
		S613992082			A	A			A	A
Dirty filter switch		S613990085	O	O	O	O	O	O	O	O
Smoke detector		S613995382	O	O	O	O	O	O	O	O
Fire detection thermostat		S613903003	O	O	O	O	O	O	O	O
Hot water coil		S611083351								
Electric heaters	12 kW	S611761584								
	25 kW	S611762284								
	37 kW	S611763385								
	50 kW	S611764485								
Propane conversion Kit		S611801780	A	A	A	A	A	A	A	A
High heat gas conversion kit		S611803080	O	O	O	O	O	O	O	O
Filter kit F6		S611300401	O	O			O	O		
		S611300701			O				O	
		S611300901				O				O
Filter kit F7		S611300402	O	O			O	O		
		S611300702			O				O	
		S611300902				O				O
Grill condenser coil protection		S661752304	O				O			
		S661752324		O				O		
		S661752314			O	O			O	O
Antivibration mounting kit		S613990411	A	A	A	A	A	A	A	A
Return fan bottom duct		S613993042	A	A			A	A		
		S613993072			A	A			A	A
Energy recovery	Q6000 (1)	S611994511	A	A			A	A		
	Q3000 (1)	S611994512	A	A			A	A		
	Q9000 (1)	S611997511			A	A			A	A
	Q4500 (1)	S611997512			A	A			A	A
Filter kit F6 for energy recovery		S611994506	O	O			O	O		
		S611997506			O	O			O	O
Filter kit F7 for energy recovery		S611994507	O	O			O	O		
		S611997507			O	O			O	O
Alarm relay board		S606791243	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Copper-copper coil		Contact us	O	O	O	O	O	O	O	O

O=Option (factory fitted). A=Accessory (supplied loose). O/A=If you want this item factory fitted, precise it in the order form.

(1) = Energy recovery accessory includes: economizer, rain hood, indoor air quality sensor and G4 filters.

(2) Fresh air damper can not be installed if economizer or motorized damper is fitted

* Features: increased efficiency by 0.15, extended max outdoor temperature up to +50°C at full load, Low ambient kit.

Large ACTIVA Rooftop

ARC-ARH 100 to 175 AB

A complete range from 108 kW up to 169 kW




YKN2open

Features

- High efficiency EER and COP
- Ecodesign ErP 2021 compliant
- Quiet operation
- Configurations: Cooling only and Heating
- BMS communication as standard (N2Open protocol)
- Partial loads
- Extended working range (up to 52°C outdoor temperature)
- F6 & F7 filters available as option (G4 standard)
- Energy recovery (ask JCI for availability)

ARC 150 AB Nomenclature

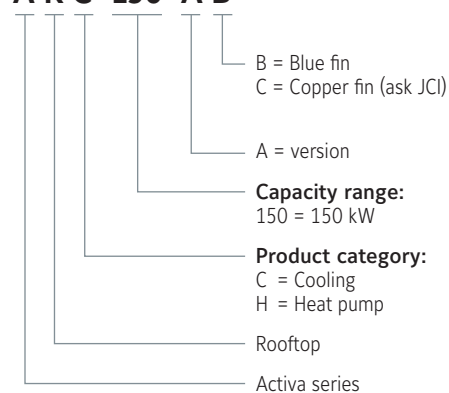

Large ACTIVA Rooftop

ARC-ARH 100 to 175 AB



Technical features

Cooling only models			ARC 100 AB	ARC 125 AB	ARC 150 AB	ARC 175 AB
Net cooling capacities	kW		108.1	121.8	149.3	169.0
Power input	kW		34	41	59	64
SEER			4.95	4.58	3.72	3.53
ηs,c			195.0	180.1	145.7	138
Working range (full load / partial load) *	°C		7°C ~ 46°C / -10°C ~ 52°C			
Heat pump models			ARH 100 AB	ARH 125 AB	ARH 150 AB	ARH 175 AB
Net cooling capacities	kW		108.1	121.8	149.3	169.0
Power input in cooling	kW		34	41	59	64
Heating capacities (1)	kW		104.6	118.4	147.0	167.0
Power input in heating	kW		33	37	53	61
SCOP			3.58	3.44	3.44	3.44
ηs,h			140.2	134.5	134.6	134.5
Working range (full load / partial load) *	°C		-10°C ~ 46°C / -10°C ~ 52°C			
Common characteristics						
Power supply			400V / 3 / 50Hz			
Main switch	A		100	125	160	200
Main cable	Nbr. x mm²		3 x 35	3 x 50	3 x 50	3 x 70
Cable to thermostat	Nbr. x mm²		10 x 0,22			
Number of circuits / Compressor type			2 (tandem) / 4 x scroll			
Evaporator fan at nominal airflow	Airflow	m³/h	19 000	21 000	27 000	31 000
	Power input	kW	3.0	3.3	8.3	9.1
Nett dimensions	Height	mm	2 142		2 142	
	Length	mm	4 036		5 085	
	Depth	mm	2 250		2 250	
Nett weight ARC	kg		1 737	1 744	2 074	2 090
Nett weight ARH	kg		1 765	1 772	2 135	2 150

All the data are at EUROVENT conditions with 400V/3+N/50Hz.

Cooling : Entering indoor coil temp. 27°C / 19°C WB and outdoor temperature 35°C - Heating : Entering indoor coil temp. 20°C and outdoor temperature 7°C / 6°C WB

(1) Add indoor fan motor consumption to know total heating capacity.

* With Premium kit (full load / partial load): -10°C ~ 50°C / -10°C ~ 52°C


Codes

Cooling only models	ARC 100 AB	ARC 125 AB	ARC 150 AB	ARC 175 AB
	S661852400	S661852420	S661852450	S661852480
Heat pump models	ARH 100 AB	ARH 125 AB	ARH 150 AB	ARH 175 AB
	S661852403	S661852423	S661852453	S661852483
Thermostat				
to be ordered separately		DPC-1		



Manufacturer reserves the rights to change specifications without prior notice.

Large Activa rooftop details

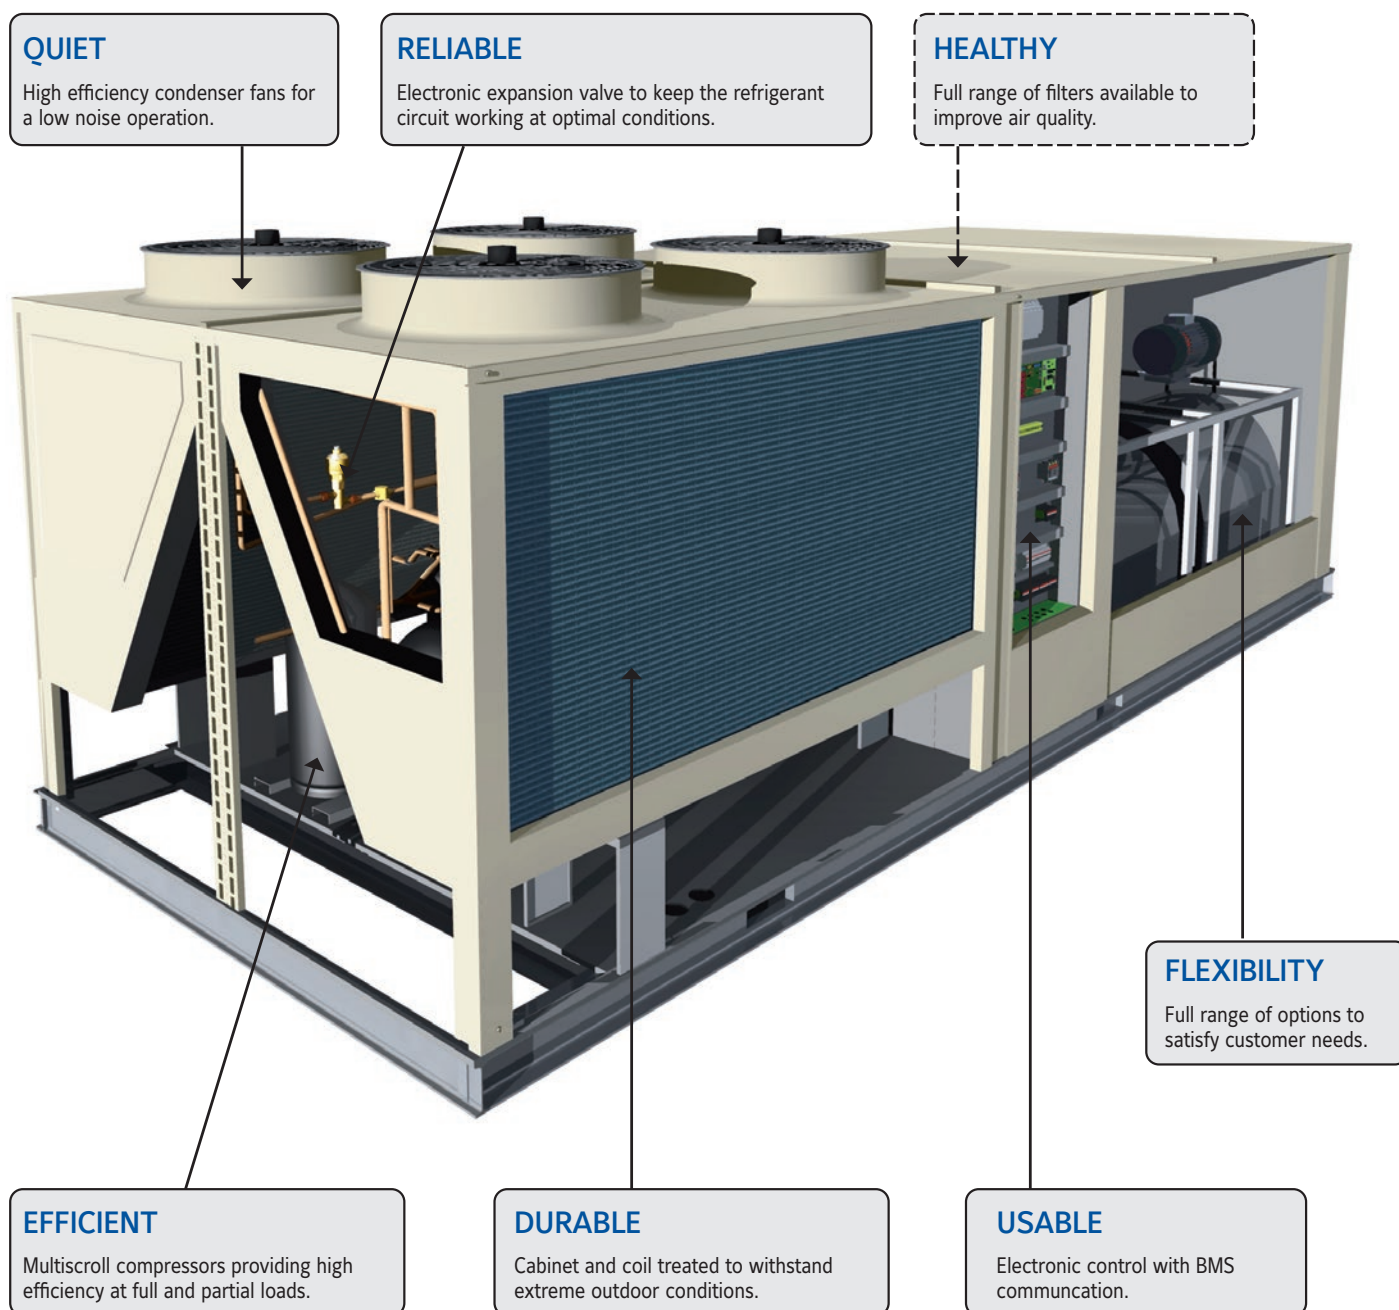

Accessories & options

		Code	Cooling only				Heat pump			
			100	125	150	175	100	125	150	175
Thermostat DPC-1		S603786044	A	A	A	A	A	A	A	A
YNK2Open Gateway BACnet / IP – JCI Metasys N2		S606791244	A	A	A	A	A	A	A	A
YNK2Open Gateway Modbus TCP / IP – JCI Metasys N2		S606791245	A	A	A	A	A	A	A	A
Dry bulb triple input economizer or motorized air damper with rain hood		S611751011	O	O			O	O		
		S611751511			O	O			O	O
Enthalpy probes		S613990081	O	O	O	O	O	O	O	O
Indoor air quality sensor		S606819964	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Power Exhaust		S611751021	A	A			A	A		
		S611751521			A	A			A	A
Barometric relief damper		S611751031	A	A			A	A		
		S611751531			A	A			A	A
Fresh air damper		S613751021	A	A			A	A		
		S613751521			A	A			A	A
High pressure drive	7.5 kW (IE3)	S611751091	O	O			O	O		
	11 kW (IE3)	S611751093	O	O			O	O		
	5.5 kW (IE3)	S611751591			O				O	
	7.5 kW (IE3)	S611751592			O	O			O	O
Side duct supply		S611751061	O	O			O	O		
		S611751561			O	O			O	O
Soft start indoor fan	5.5 kW	S606744690	O	O	O	O	O	O	O	O
	11.5 kW	S606744691	O	O	O	O	O	O	O	O
Premium Kit (LAK included) *		S611751071	O	O	O	O	O	O	O	O
Fixed roof curb		S611751081	A	A			A	A		
		S611751581			A	A			A	A
Adjustable roof curb		S611751082	A	A			A	A		
		S611751582			A	A			A	A
Dirty filter switch		S613990085	O	O	O	O	O	O	O	O
Smoke detector		S613995382	O	O	O	O	O	O	O	O
Fire detection thermostat		S613903003	O	O	O	O	O	O	O	O
Hot water coil		S611751051	O	O			O	O		
		S611751551			O	O			O	O
Electric heaters	37 kW	S611751037	O	O	O	O	O	O	O	O
	50 kW	S611751050	O	O	O	O	O	O	O	O
	60 kW	S611751060	O	O	O	O	O	O	O	O
Filter kit F6		S611751046	O	O			O	O		
		S611751546			O	O			O	O
Filter kit F7		S611751047	O	O			O	O		
		S611751547			O	O			O	O
Grill condenser coil protection		S611751041	O	O			O	O		
		S611751541			O	O			O	O
Antivibration mounting kit 100/125		S613751011	O	O			O	O		
Antivibration mounting kit 150/175		S613751511			O	O			O	O
Alarm relay board		S606791243	O/A	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Copper-copper coil		Contact us	O	O	O	O	O	O	O	O

O=Option (factory fitted). A=Accessory (supplied loose). O/A=If you want this item factory fitted, precise it in the order form.

(1) = Energy recovery accessory includes: economizer, rain hood, indoor air quality sensor and G4 filters.

* Features: increased efficiency by 0.15, extended max outdoor temperature up to +50°C at full load, Low ambient kit.

Rooftop & Large Rooftop accessories & options




Triple input economizer

This system utilizes 3 probes: Return Air, Outdoor Air and Supply Air. The Outdoor Air damper and the Return Air dampers are mechanically interconnected in order to provide the same airflow at the coil inlet, with a single damper motor. The PCB compares sensor values and modulates the dampers providing maximum efficiency of the economiser system (free cooling) and comfort (Supply Air > 12°C). Combined with the air quality sensor, your payback will be ensured within few months. The rain hood is painted to match the basic unit and aluminium mesh pre-filter prevents water penetration.




Indoor air quality

This sensor measures concentrations of pollutant gases, such as tobacco smoke, human body odours, kitchen odours, carbon monoxide, etc... It automatically overrides the economizer when pollutant levels rise above preset limits. A shoring plug will set the algorithm to acceptable, good or very good air quality. This VOC sensor (Volatile Organic Compounds) sends an ON/OFF signal to the control PCB. The YKN2Open will then adjust the fresh air damper, optimising indoor air quality and minimising the energy consumption.



Motorised outdoor air damper

Equipped with the same dampers as the economizer, the Return Air probe is not used. Outdoor air damper opens to pre-set position whenever the indoor fan is operating (selected from the thermostat, the indoor fan can be activated with the compressor or to operate continuously) and will drive fully closed when the indoor fan shuts down. The rain hood is painted to match the basic unit and aluminium mesh pre-filter prevents water penetration.



Premium Kit - Low ambient control

All our rooftops are designed to work in cooling mode down to 7°C ambient temperatures. Although this working range suits most applications, the units can operate correctly down to -18°C with optional Premium Kit. The Premium Kit option consists on an EC condensing fan that will allow us to increase the airflow at reduced consumption. Also we have condensing and evaporating pressure control that will extend our operating limits. It's estimated an increased efficiency by +0.15% in EER and COP.




Enthalpy sensors

To control the economizer in humid areas, or when indoor air humidity needs to remain dry, you should select enthalpy regulation. Enthalpy sensors will be used with the triple input economizer.



High pressure drive

The high pressure drive will increase the supply fan performance for applications requiring greater air flow and/or static pressure. Please consult technical guide for more information.




Barometric relief damper

This accessory can be used to relieve internal air pressure on units equipped with triple input economiser or motorised air damper but no power exhaust. When the rooftop is working in free cooling or introducing fresh air, the damper opens to relieve over pressure from the return air section. This accessory is comprised of a rain hood, a protective grille and a fully assembled damper.



Power Exhaust

Used to mechanically relieve internal air pressure from the Return Air section and ensure efficient fresh air introduction on units equipped with triple input economiser or motorised air damper. The power exhaust fan motor works when enough Outdoor Air is blowing into the room and if Outdoor Air temperature is acceptable (12°C < t° < 30°C).



Fresh air damper and rain hood

The most cost effective method with a complete rain hood and a fixed damper that can be adjusted to provide approximately 10, 15 or 25% of fresh air.




Smoke detector

The smoke detector is protecting the AHU but must not be used to ensure a full building protection against smoke danger. If smoke is detected the AHU is shutdown (lockout). A manual reset is necessary.




Fire detection thermostat

This fire detection thermostat is protecting the AHU but must not be used to ensure a full building protection against fire danger. The standard AHU is protected as standard with a Supply Air probe that shuts the unit down (lockout) when temperature exceeds 80°C. The electro-mechanical fire detection thermostat is used to fulfil specific local requirement. A manual reset is necessary.



Dirty filter switch


Ensures that clean air is being supplied, advises when maintenance is required to prevent excessive depression and ensures water integrity of the AHU. These are the main advantages of filter dirty switch. Connected with the DPC-1 thermostat, the filter icon will appear on the thermostat screen when a filter change is required.



Fixed and adjustable roof curbs


Ideal for down-flow applications, it is a great help for installation allowing duct connections, electrical connection and weatherproofing between the roofcurb and the roof of the building. Shipped in kit form, it also gives sufficient height for condensate trap operation.

The adjustable roof curbs have the same benefits as the fixed roof curb, it allows the rooftop to be levelled on a roof with up to 7° slope (4%).



Hot water coil with control


The hot water coil and his control are always fitted, wired and factory tested. Located in the supply air section, side or bottom duct connection is possible without any modification. Complete with an anti-frost thermostat, the PCB will activate the modulated valve (24V supply, 0 – 10V modulating signal) in order to get the best comfort. A jumper will allow using hot water coil as 1st heating stage.



Side duct flanges

It's an optional (factory fitted) required when rooftops from sizes 45-175 need to work with horizontal air configuration. It's not required for models 17 to 40.

Composed of easy to install sheet metal panels to allow ductwork connections on the side of the AHU for horizontal return air and/ or supply air.



Electric heaters

Available on cooling only and Heat pump units, the electric heater is protected with two overheats per element.

When the overheat operates, there is a lock out of the faulty electric heater stage and the PCB starts automatically another heat stage.




Kit conversion propane

This kit comprises replacement burner, pilot injectors and all necessary instructions for converting the natural gas burner to propane gas. The nominal pressure of the propane gas should be 37 mbar.




High heat gas

This kit comprises replacement burner injectors and all necessary instructions to provide high heat capacity for gas rooftop.




Energy recovery

Attached to the return air box of the rooftop, a rotary enthalpy wheel retrieves the energy of the exhausted air and transmits it to the fresh air intake. A special material used in the wheel allows that latent heat as well as sensible heat are transmitted.



Antivibration mounting kit

It is composed by a set of stainless steel springs, to be assembled underneath the rooftop in a specific position. Their installation avoids the potential vibration transmission of the equipment to the building and reduces therefore the noise level (compressors have their own shock absorbers delivered as standard).




Indoor fan soft start

Compact control unit with a motor with AC semiconductors, designed for soft starting and stopping of three-phase motors for centrifugal fans. The starting time, the stopping time and the initial torque are adjusted by mean of independent potentiometers.




Return fan

Used to overcome high return path pressure drops, works in series with the indoor fan to maintain the air pressure of the conditioned space within acceptable levels. (Only available in models ARx 45-90).



Grill condenser protection

Metallic frame painted with oven-baked polymerized paint (800h salt spray resistance) to protect the fins of the coils from external damages.



Air filters

G4, F6 and F7 filters are available to purify the air in the room. M1 fire class and manufactured in sheet metal frame, they are easy to install and clean.

VITALITY Split Rooftop

VIRSAC / VIRSAH 20 to 90 AB

A complete range from 19.1 kW up to 86.1 kW




Features

- Split rooftop for installation where space is at a premium
- Available with energy efficient axial fan on outdoor unit
- YKN2open board
- High technology fan blades increases efficiency and reduces noise level
- Service valves
- Economizer or motorized damper
- Return fan
- Indoor air quality
- Hot water coil and control
- Scroll compressor with crankcase heater
- Digital thermostat DPC-1 included

VIRSAC 45 AB

Nomenclature

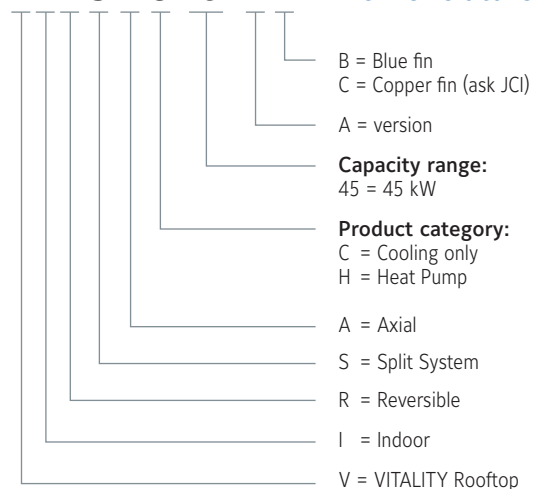

VITALITY Split Rooftop

VIRSAC / VIRSAH 20 to 90 AB



Technical features

COMPLETE MODEL		VIRSAC20AB	VIRSAC25AB	VIRSAC30AB	VIRSAC45AB	VIRSAC60AB	VIRSAC75AB	VIRSAC90AB
		VIRSAH20AB	VIRSAH25AB	VIRSAH30AB	VIRSAH45AB	VIRSAH60AB	VIRSAH75AB	VIRSAH90AB
INDOOR UNITS								
Cooling only and Heat pump	VIR	25AB		40AB	45AB	60AB	75AB	90AB
OUTDOOR UNITS								
Cooling only models	VAC	20AB	25AB	30AB	45AB	60AB	75AB	90AB
Cooling capacities	kW	19.10	23.00	28.80	42.90	54.00	72.30	86.10
Power input in cooling	kW	5.60	6.99	9.60	13.53	18.60	23.09	28.60
SEER		3.49	3.30	3.01	3.32	3.10	3.21	3.25
ηs,c		136.7	129.0	117.5	129.6	121.2	125.4	126.9
Refrigerant charge on site for 7 m piping length	kg	12	12	12.5	2 x 11	2 x 11.5	2 x 15.5	2 x 15
Heat pump models	VAH	20AB	25AB	30AB	45AB	60AB	75AB	90AB
Cooling capacities	kW	19.10	23.00	28.80	42.90	52.10	72.30	86.10
Power input in cooling	kW	5.60	6.99	9.60	13.53	18.60	23.09	28.60
Heating capacities	kW	21.20	25.20	31.90	44.80	59.40	81.00	93.10
Power input in heating	kW	4.94	6.73	8.41	12.69	17.06	22.13	28.82
SCOP		2.97	2.96	2.96	3.03	3.02	2.98	2.96
ηs,h		115.8	115.4	115.5	118.2	117.9	116.2	115.4
Refrigerant charge on site for 7 m piping length	kg	12	12	12.5	2 x 11	2 x 11.5	2 x 15.5	2 x 15
Power supply		400V/3 + N/ 50Hz						
Nominal / Starting current	A	8.5 / 74	11.8 / 95	15 / 118	2 x 12 / 95	2 x 15 / 118	2 x 19 / 140	2 x 25 / 198
Main switch (1)	A	20	25	32	50	63	80	100
Main cable to the outdoor unit (1)	Nbr x mm²	5 x 4	5 x 4	5 x 6	5 x 10	5 x 16	5 x 25	5 x 35
Interconnecting cable (1)	Nbr x mm²	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 2.5
Cable to standard thermostat (2)	Nbr x mm²	10 x 0.22						
Insulated refrigerant piping		Suction	1-1/8"	1-1/8"	1-1/8"	2 x 1-1/8"	2 x 1-1/8"	2 x 1-3/8"
		Liquid	1/2"	1/2"	5/8"	2 x 1/2"	2 x 5/8"	2 x 7/8"
Evaporator fan VIR at nominal airflow (3)	Airflow	m³/h	4 590	4 590	7 500	9 000	10 500	13 000
	Standard ESP	Pa	172		153	150	178	240
	ESP with HSD	Pa	267		242	203	277	399
	ESP with HSDM	Pa	267		242	203	277	399
Nett dimensions outdoor VAC / VAH	Height	mm	1 230	1 230	1 382	1 378 / 1 429	1 378 / 1 429	1 534
	Length	mm	882	882	882	1 627	1 627	1 627
	Depth	mm	1 354	1 354	1 354	1 453	1 453	2 099
Nett dimensions indoor VIR	Height	mm	592		665	764	764	838
	Length	mm	1360		1740	2240	2240	2653
	Depth	mm	785		785	772	772	892
Nett weight	VAC / VAH	kg	227	228	250	470	483	610
	VIR	kg	128		173	223	223	310

(1) For information only. These should be checked for compliance with local regulations depending also on installation and conductor type.

(2) Shield type cable only. (3) ESP = External static pressure HSD = High speed drive HSDM = High speed drive and motor

All the data are at EUROVENT conditions with 400V/3+N/50Hz.

Cooling : Entering indoor coil temp. 27°C / 19°C WB and outdoor temperature 35°C Heating : Entering indoor coil temp. 20°C and outdoor temperature 7°C / 6°C WB

Please note indoor and outdoor units can no longer be purchased as individual items, they can only be supplied as a matching pair to comprise the Split Rooftop system.

Vitality Split Rooftop systems comprise of following matched pairs:

CODES	PRODUCT	OLD PRODUCT
S661522073	VIRSAC20AB (Blue fin)	VAC20AB + VIR 25 AB (Blue fin)
S661522573	VIRSAC25AB (Blue fin)	VAC25AB + VIR 25 AB (Blue fin)
S661523073	VIRSAC30AB (Blue fin)	VAC30AB + VIR 40 AB (Blue fin)
S661524673	VIRSAC45AB (Blue fin)	VAC45AB + VIR 45 AB (Blue fin)
S661526173	VIRSAC60AB (Blue fin)	VAC60AB + VIR 60 AB (Blue fin)
S661527673	VIRSAC75AB (Blue fin)	VAC75AB + VIR 75 AB (Blue fin)
S661529173	VIRSAC90AB (Blue fin)	VAC90AB + VIR 90 AB (Blue fin)

CODES	PRODUCT	OLD PRODUCT
S662532073	VIRSAH20AB (Blue fin)	VAH20AB + VIR 25 AB (Blue fin)
S662532573	VIRSAH25AB (Blue fin)	VAH25AB + VIR 25 AB (Blue fin)
S662533073	VIRSAH30AB (Blue fin)	VAH30AB + VIR 40 AB (Blue fin)
S662534673	VIRSAH45AB (Blue fin)	VAH45AB + VIR 45 AB (Blue fin)
S662536173	VIRSAH60AB (Blue fin)	VAH60AB + VIR 60 AB (Blue fin)
S662537673	VIRSAH75AB (Blue fin)	VAH75AB + VIR 75 AB (Blue fin)
S662539173	VIRSAH90AB (Blue fin)	VAH90AB + VIR 90 AB (Blue fin)



Manufacturer reserves the rights to change specifications without prior notice.

Accessories or options

Compatibility table / Codes

VITALITY UNITS							
Cooling only models	VAC 20 AB	VAC 25 AB	VAC 30 AB	VAC 45 AB	VAC 60 AB	VAC 75 AB	VAC 90 AB
	S661522073	S661522573	S661523073	S661524673	S661526173	S661527673	S661529173
Heat pump models	VAH 20 AB	VAH 25 AB	VAH 30 AB	VAH 45 AB	VAH 60 AB	VAH 75 AB	VAH 90 AB
	S662532073	S662532573	S662533073	S662534673	S662536173	S662537673	S662539173

Thermostat							
Delivered with the unit		DPC-1					
YNK2Open Gateway BACnet / IP - JCI Metasys N2	S606791244	A	A	A	A	A	A
YNK2Open Gateway Modbus TCP / IP - JCI Metasys N2	S606791245	A	A	A	A	A	A

Accessories or options for outdoor units

VAC/VAH models		20AB	25AB	30AB	45AB	60AB	75AB	90AB
Low Ambient Kit	S606819974	O	O	O				
	S606819975				O	O	O	O
Soft start compressor	S606744692	O	O	O				
	S606744693				O	O	O	O
Alarm relay board	S606791243	O/A	O/A	O/A	O/A	O/A	O/A	O/A
Copper-copper coil	Contact us	O	O	O	O	O	O	O
	S606819801	O	O	O				
	S606819802				O	O		
Power cut-off switch control panel mounted	S606819802				O	O		
	S608819803						O	O

Accessories or options for indoor units

VIR models			25A	40AB	45AB	60AB	75AB	90AB
Electrical Heaters (Inside the unit) (cable 20 m included)	10 kW (1 stage)	S611763704	O/A					
	15 kW (1 stage)	S611763714	O/A					
	10 kW (1 stage)	S611763724		O/A				
	20 kW (2 stages)	S611763734		O/A				
	15 kW (1 stage)	S611763744			O/A	O/A		
	30 kW (2 stages)	S611763754			O/A	O/A		
	30 kW (2 stages)	S611763764					O/A	O/A
	40 kW (2 stages)	S611763774					O/A	O/A
50 m connecting cable	1 stage	S611763780	A	A	A	A		
	2 stages	S611763781		A	A	A	A	A
Economizer or Motorised damper (dry bulb sensors included) (cable 20 m included)		S613994250	A					
		S613994400		A				
		S613994450			A	A		
		S613994750					A	A
Indoor air quality		S606819964	A	A	A	A	A	A
		S611082513	O					
Hot water coil and control (cable 20 m included)		S611084010		O				
		S611084512			O	O		
		S611087510					O	O
50 m communication cable (Economizer/HWC)		S611087520 *	A	A	A	A	A	A
Return fan		S613995450			A	A		
		S613995750					A	A
Vertical discharge Kit		S669482502	O					
		S669484002		O				
		S669486002			O	O		
		S669487502					O	O
Indoor fan smooth start up to 5,5 kW		S606744690	O	O	O	O	O	O
		S611991087	O					
High speed drive		S611991089		O				
		S611991091			O		O	
		S611991092				O		
		S611991095						O
High speed drive and motor		S611991088	O					
		S611991090			O			
		S611991093				O		
		S611991094					O	
		S611991096						O

O = Option (factory fitted) A = Accessory (supplied loose) O/A = If you want this item factory fitted, precise it in the order form


(1) Factory fitted, for horizontal airflow only.

* If the unit is equipped with economizer and hot water coil, only 1 communication cable is necessary.

Indoor units dimensions




VIR 25 AB

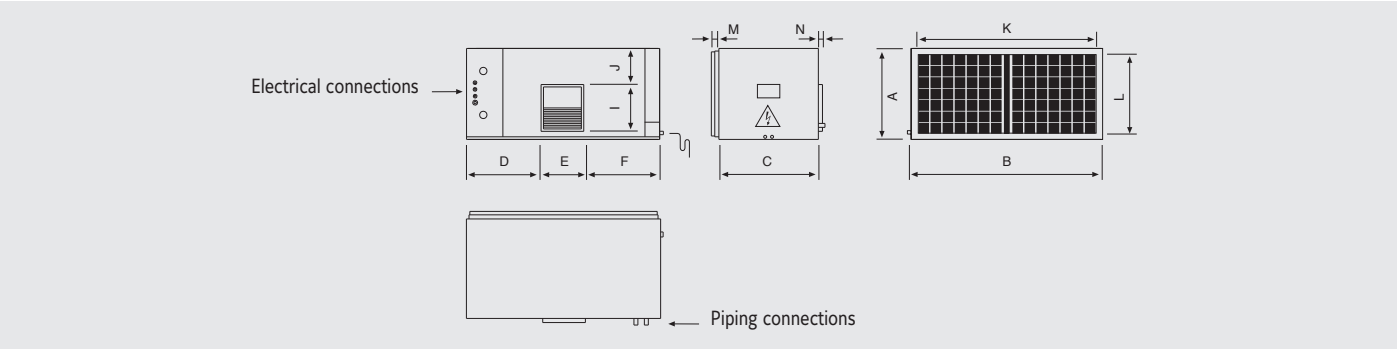

All dimensions in mm. Drawings not a scale.

Unit	A	B	C	D	E	F	G	H	I	J	K	L	M	N
VIR 25 AB	592	1360	785	480	403	480	-	-	347	40	1094	520	21	25


VIR 40-45-60 AB

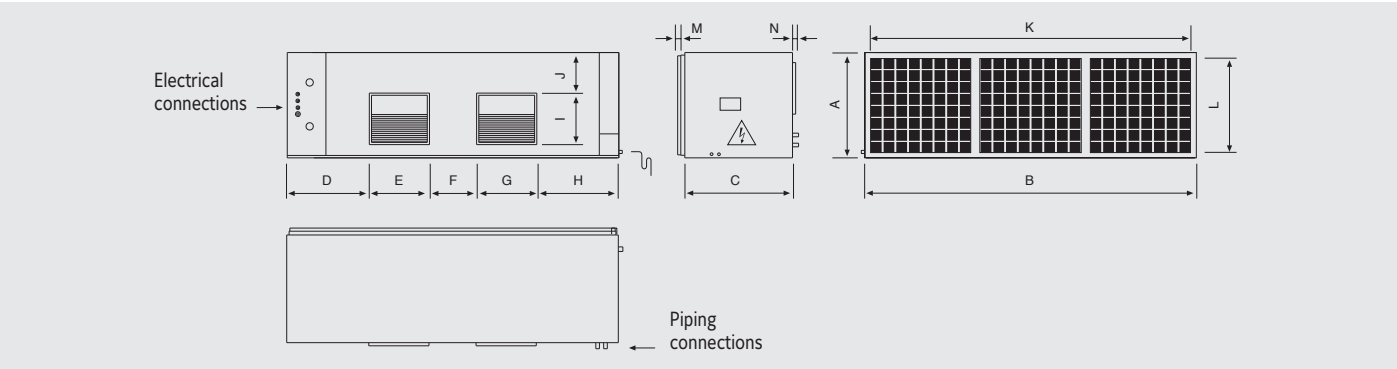

All dimensions in mm. Drawings not a scale.

Unit	A	B	C	D	E	F	G	H	I	J	K	L	M	N
VIR 40 AB	665	1740	785	442	316	229	316	442	347	79	1337	593	21	25
VIR 45 AB	764	2240	772	567	401	309	401	567	347	79	1920	692	21	25
VIR 60 AB	764	2240	772	567	401	309	401	567	347	79	1920	692	21	25

VIR 75-90 AB

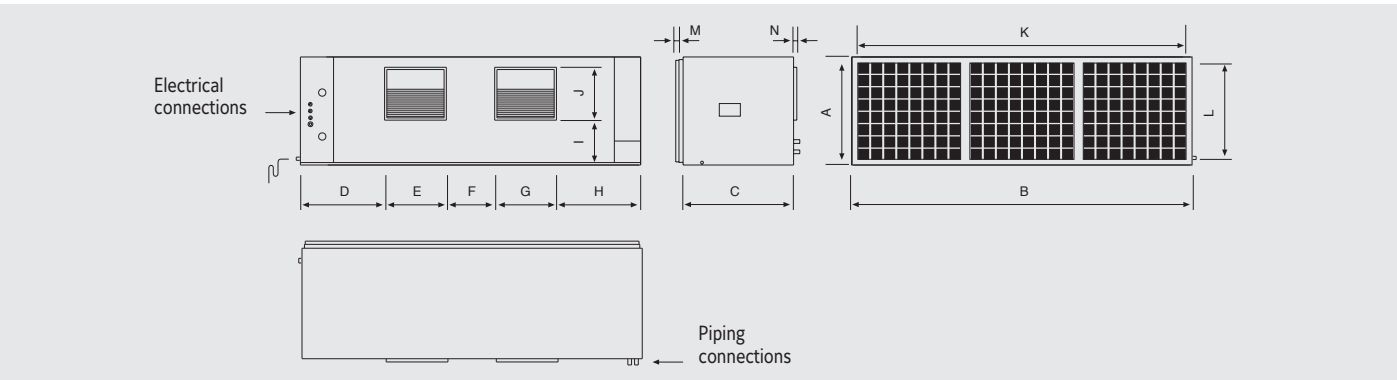


All dimensions in mm. Drawings not a scale.

Unit	A	B	C	D	E	F	G	H	I	J	K	L	M	N
VIR 75 AB	838	2653	892	663	478	376	478	663	409	79	2196	766	21	25
VIR 90 AB	838	2653	892	663	478	376	478	663	409	79	2196	766	21	25


Dimensions and space requirements for outdoor units

VAC-VAH 20-25-30 AB

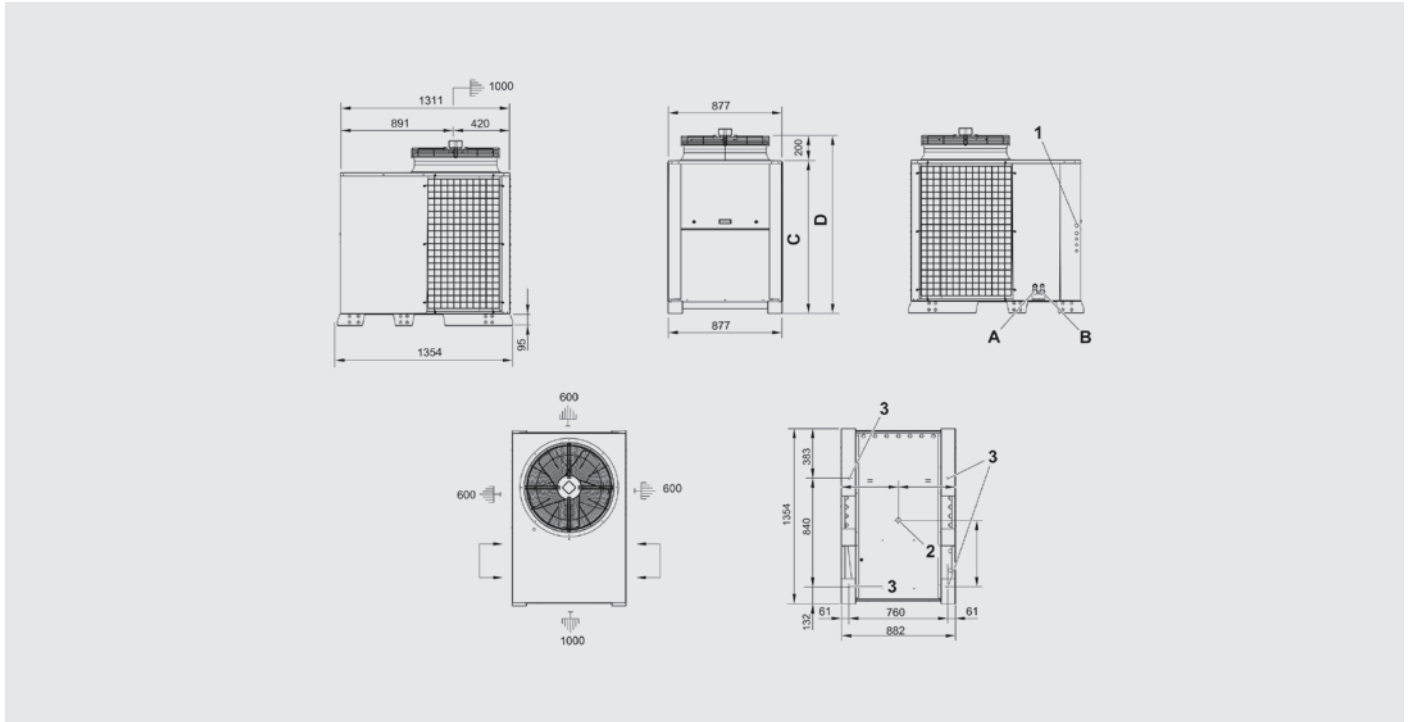

All dimensions in mm. Drawings not a scale.


VAC-VAH 45-60 AB

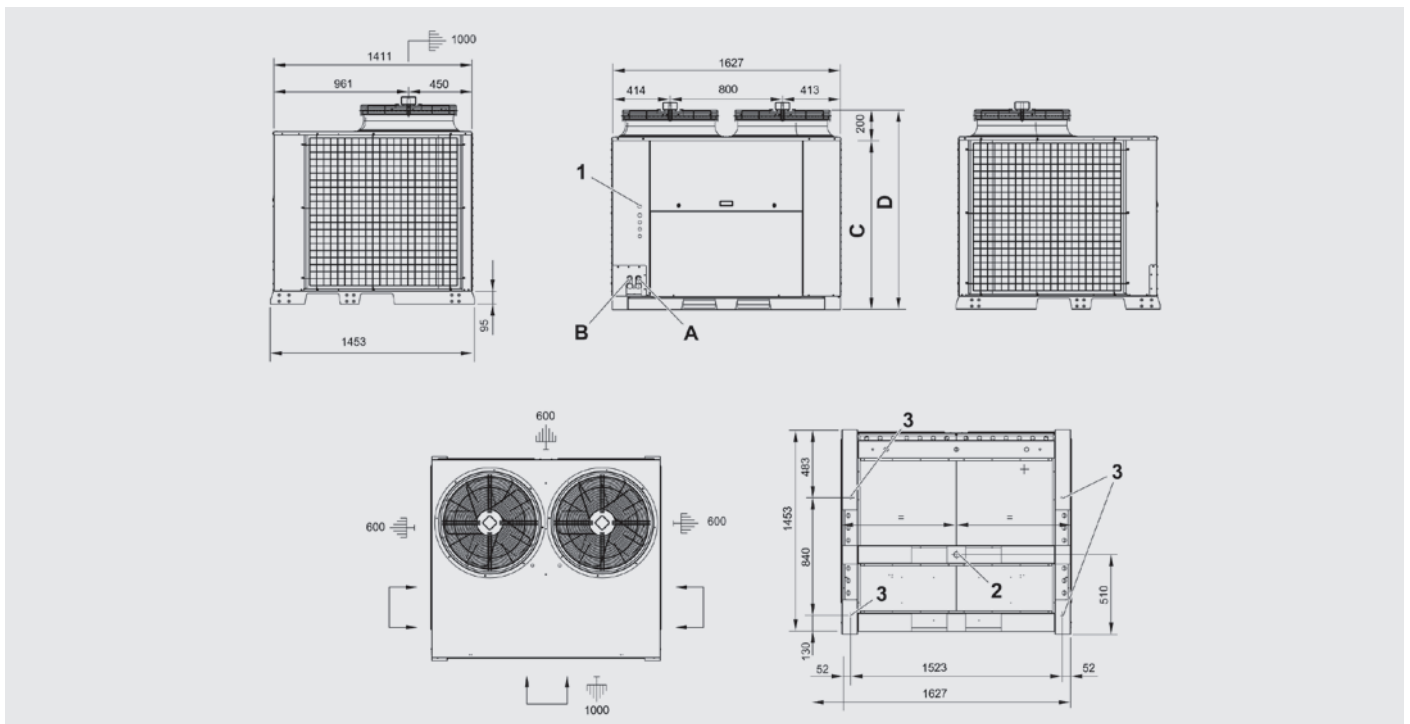

All dimensions in mm. Drawings not a scale.



VAC-VAH 75-90 AB

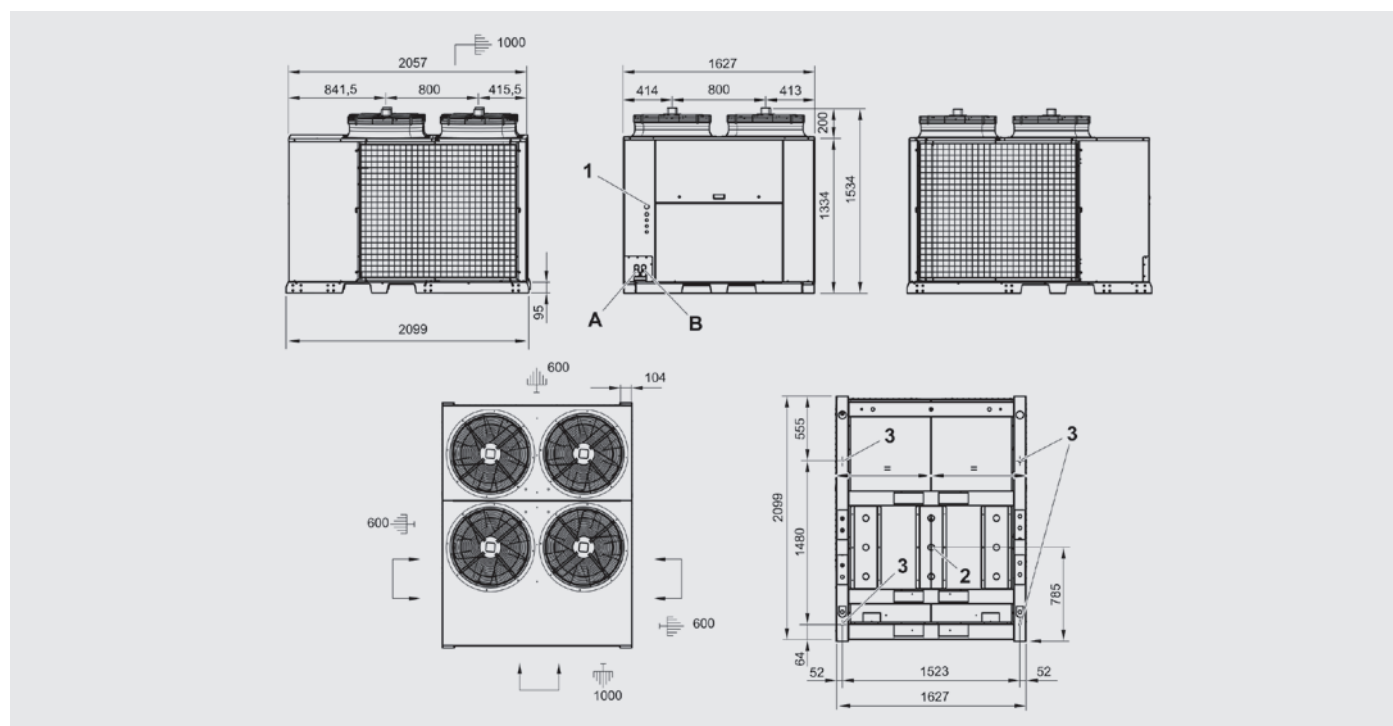

All dimensions in mm. Drawings not a scale.

VAC-VAH 20-25-30 AB

	A	B	C	D
Unit	Gas piping diameter	Liquid piping diameter	mm	mm
VAC 20 AB	1-1/8"	1/2"	1 030	1 230
VAH 20 AB	1-1/8"	1/2"	1 030	1 230
VAC 25 AB	1-1/8"	1/2"	1 030	1 230
VAH 25 AB	1-1/8"	1/2"	1 030	1 230
VAC 30 AB	1-1/8"	5/8"	1 182	1 382
VAH 30 AB	1-1/8"	5/8"	1 182	1 382

VAC-VAH 45-60 AB

	A	B	C	D
Unit	Gas piping diameter	Liquid piping diameter	mm	mm
VAC 45 AB	2 x 1-1/8"	2 x 1/2"	1 178	1 378
VAH 45 AB	2 x 1-1/8"	2 x 1/2"	1 129	1 429
VAC 60 AB	2 x 1-1/8"	2 x 5/8"	1 178	1 378
VAH 60 AB	2 x 1-1/8"	2 x 5/8"	1 129	1 429

VAC-VAH 75-90 AB

	A	B	C	D
Unit	Gas piping diameter	Liquid piping diameter	mm	mm
VAC 75 AB	2 x 1-3/8"	2 x 7/8"	-	-
VAH 75 AB	2 x 1-3/8"	2 x 7/8"	-	-
VAC 90 AB	2 x 1-3/8"	2 x 7/8"	-	-
VAH 90 AB	2 x 1-3/8"	2 x 7/8"	-	-



Comprehensive Solutions

Verasys Configurable building controls system for smarter buildings

Metasys Building Automation and Control Systems

Lifecycle Services



Configurable building controls system for smarter buildings

For Light Commercial Building Controls

Enterprises have more options to reduce costs and increase control of HVAC, refrigeration and lighting equipment. Verasys is a new plug-and-play control system with less complexity and more capabilities. It streamlines installation, commissioning, and servicing, and provides access to critical data – when you need it and where you need it – to help facilities perform at peak levels.

Verasys provides a simple user experience with configurable controllers (without tools), creating the first plug-and-play experience integrating HVACR equipment and controls for a certified system that's compliant for energy efficient operations.

Making buildings smarter by optimizing equipment.

The Verasys control system leverages smart equipment technology from any manufacturer. Verasys is a straightforward, easy way to control and optimize single-site and multi-site enterprises. All mechanical equipment seamlessly connect to it and self-identify without requiring any special programming tools. As a result, you can take advantage of a new level of insight into building operations, and provide facilities that better serve occupants.

Smart, integrated control. Simplified and supported.

Verasys gives users remote access over a secure internet connection. Plus, optional fault detection and diagnostics deliver alarm notifications immediately via email or text, and user-friendly graphics provide easy access to critical facility information to help minimize the risk of unplanned downtime and costly repairs. You can take advantage of predictive technologies solutions that deliver the quality and value your enterprise requires.

Enhanced energy efficient control for smaller commercial buildings allow for an even higher energy class according to the EN15232. The advantage is that a facility owner can move from an average class D to a class A. The key to this efficiency is demand control, where the consumer spaces/rooms send the energy demands signals/requirements to the heating/cooling equipment. Matching the demand side and the supply side guarantees an energy efficient system overall.

Whether it's one site, or one thousand, Verasys provides an advanced level of control flexibility, including scheduling, alarming, setpoints, custom trending, and more. It communicates using BACnet® MSTP, so Verasys is expandable to any BACnet® compliant system. And it works with third-party package equipment for greater application flexibility and to protect existing investments.



Leveraging Smart Equipment from Johnson Controls.

Smart Equipment from Johnson Controls identifies embedded equipment that has advanced technology and smarts already embedded. Verasys takes full advantage of our Smart Equipment technology. It provides real-time performance data. No programming or commissioning tools. No engineering required. Just plug-and-play.

The primary benefit of Smart Equipment is that it already has controls embedded by the manufacturer. This means it can connect seamlessly to controls systems like Verasys. It uses on-board controls to support data analytics, including fault detection, to support proactive maintenance and minimize downtime. Plus, control products/devices that are capable of controlling equipment without a supervisory controller provide a user interface experience. This allows it to self-discover and/or communicate with other Smart Equipment. In short, Smart Equipment helps maximize control for greater efficiency, extended equipment life and reduced operating costs.

To see how you can take advantage of Smart Equipment, visit www.getsmartequipment.com.



Built-in comfort and efficiency.

Verasys helps enable a smarter building which means more comfort, productivity and efficiency. Verasys connects you to data streams from smart controls in rooftop units, chillers, heat pumps, fan coils, zone dampers, refrigeration systems, lighting panels and more. Data can be accessed anywhere, at any time, from any mobile device. This unprecedented, real-time access to critical information ensures energy efficiency and lower operating costs throughout the building's lifecycle so you can identify issues before they result in unplanned downtime. This extends equipment life.


You also have the opportunity to save operating costs and simplify access to smart technology with Verasys, a complete buildings controls system that provides near real-time analysis of facility health and performance for optimal uptime. This includes access to a technologically advanced family of controllers which are configurable (no programming or tools needed), and access to a library with a vast array of applications that provides versatility and expandability.

A smarter way to transform your business.

Verasys provides the means, capabilities and reliable products to deliver leading-edge, end-to-end control technology to building owners. You get the best value and optimized building environments that support enterprise needs to increase productivity, efficiency, and maximize energy and cost savings.

Plug and play control system to manage smart buildings.

In a single building, or across an entire enterprise, Verasys offers a new kind of plug-and-play controls solution. Through an advanced yet intuitive user interface, it delivers a higher level of building control intelligence that optimizes building ecosystems, resulting in a building that better serves its occupants.

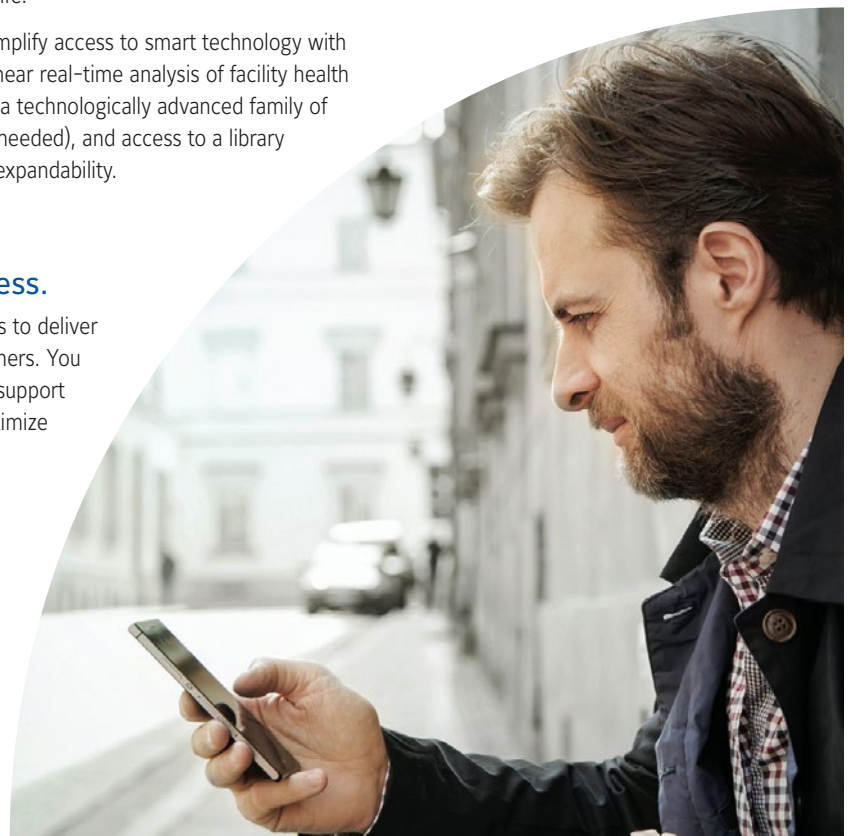

Metasys Building Automation and Control Systems

Metasys building management system from Johnson Controls ensures all of the building systems – comfort controls, lighting, fire safety, security and HVAC equipment – operate together in harmony. With an innovative, IT-based infrastructure, software and wireless capabilities, Metasys is the one building management system that coordinates and organizes all the information logically to deliver it where and when needed, giving more control and easier access to information than any other system of its kind.

Previously a winner of the Frost & Sullivan North American BAS Market Leadership Award, Metasys now offers even more.


Ease of use

- Easy to configure and deploy
- No special training is required to use it
- The new Metasys UI is designed to enhance our customers' productivity and effectiveness. It allows users to navigate by space to view summaries, trends, and activities, emulating the way they work every day. The new user interface is also optimized for all devices, enabling our customers to work smarter from any device and any location.



More efficiency, less costs

- The Energy Essentials leverages the Metasys Advanced Reporting System to take the existing data and present it in an organized and informative way, providing easy-to-configure, easy-to-use and actionable energy reports
- The improved Johnson Controls Central Plant Optimization 10 (CPO 10) helps facility managers operate their chiller plants more efficiently. CPO algorithms are used to operate and sequence plant equipment in an efficient and reliable manner, and to ensure that runtime, starts and stops are equalized across the individual plant components saving energy and improving reliability in the facility.

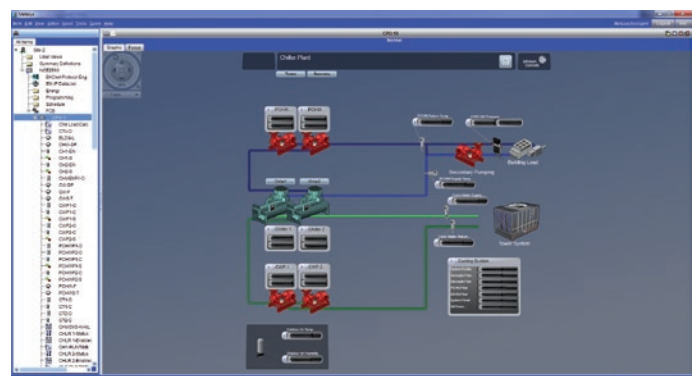

Single platform communication

- Enhanced, single platform interface of thousands of different hardwired and wireless systems, devices and equipment.
- Even more control options and better information access by users, thanks to:
 - Field Equipment Controllers redesigning
 - Terminal Equipment Controller updates and improvements
 - Added wireless and network sensors
 - Enhanced software and firmware



Wireless capabilities

- Increased control flexibility, streamlines retrofits and faster download times, thanks to the latest wireless technologies that Metasys incorporates into more devices.
- At system's user interface, network automation, field controller or room sensing levels, Wireless Building Technologies from Johnson Controls always result in increased application flexibility and cost effectiveness.




Room Automation Solution and Hotel Guest Room Management Solution

- Transponder readers, transponder holders, transponder encoders, transponder cards, key holders, electronic door panels... A complete access control solution where this kind of application is required.
- JSuite software dedicated for hotel management, for the supervision of KNX environments, access control and alarms.



Security features

- Metasys now incorporates P2000 Security Management System, whose software and network controllers ensure the safety of employees and security of company assets.
- P2000 open integration platform, designed for interoperability with a variety of security subsystems including access control, alarm & intrusion detection, video surveillance, visitor management.

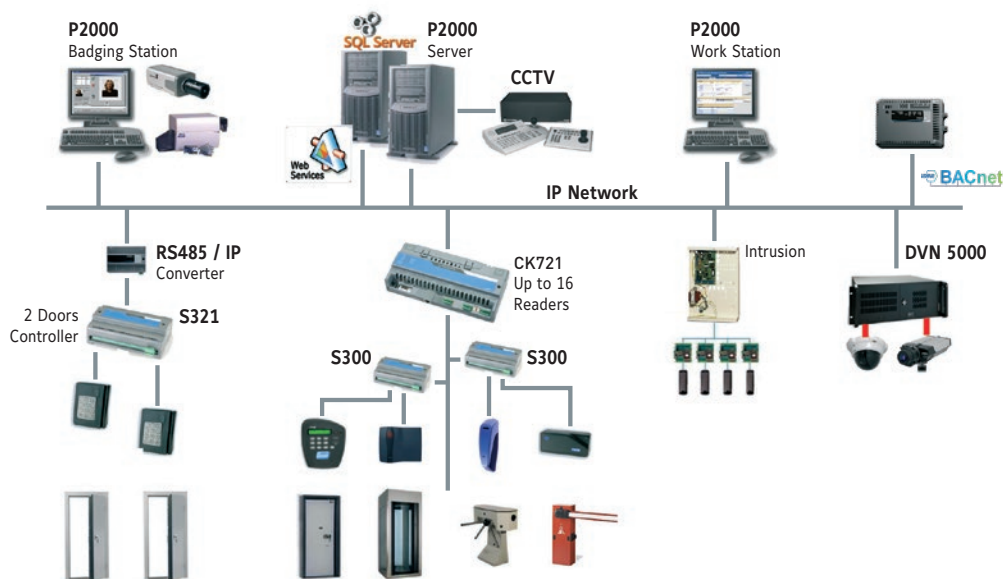


Manufacturer reserves the rights to change specifications without prior notice.

Lifecycle Services

Get the most out of your building

Johnson Controls Building Solutions & Services Lifecycle Program

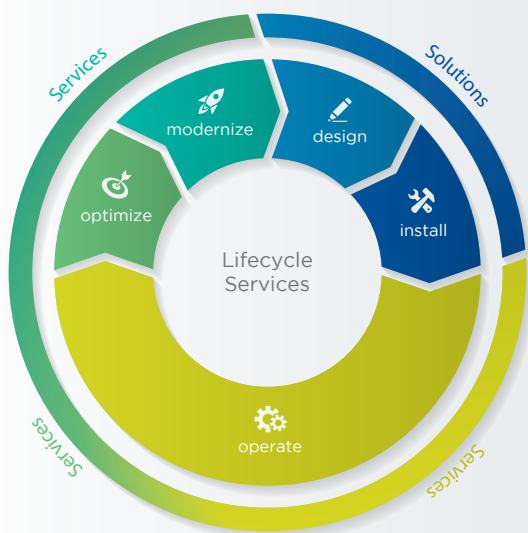

Making your business and facilities run at peak performance

Johnson Controls helps you **drive the outcomes that matter most in your building**. Ensuring the key stakeholders are involved during the design and installation cycles, this helps in providing the best solutions for creating comfortable, easy-to operate and sustainable smart buildings.

Our service experts are at the forefront of the best field and digital practices right from installation supervision, start-up and commission, to operate and maintain, until optimize and modernize. This preserves and enhance the building value by improving safety, productivity and sustainability, thereby optimizing the total cost of building ownership.



Design

Optimizing business facilities from the very beginning.



Install

Making business facilities work from day one.



Operate

Peace of mind and performance your facility needs.



Optimize

Optimizing business facilities with evolving regulations, solutions and requirements.



Modernize

Improve safety, productivity and sustainability with smart enhancements.

Rental Solutions | Comfort & Process cooling



Temporary temperature control services that ensure uninterrupted business operations

Ensure your temperature control process operates smoothly anytime, anywhere from emergency needs to contingency planning. It is essential for critical operations such as comfort or process cooling and heating to have a backup plan. Experience an extensive fleet of YORK equipment by renting directly from the original equipment manufacturer. This assures a large assortment of equipment, skillfully maintained and expertly installed and dismantled.

- **Fleet:** High-efficiency and low-noise equipment that covers all your needs.
- **Industries:** Comfort or process cooling and heating.
- **Agreement Modalities:** Tailored solutions adapted to any budget.

Design services



Optimizing business facilities from the very start

Knowledge and action – elements vital to continuous improvement

Using data and technology to ensure building systems are designed and built, with lifecycle costs in mind. It continues by integrating green practices to meet energy and other standards.

Johnson Controls' building design services are:

- **Technology navigation**

Showcase HVAC YORK technologies like air-cooled, water-cooled and absorption chillers, rooftops, air handling units, close control units and fancoils

- **Design assist**

Collaborative approach assures success.

Install services



Making business facilities work from day one

Reliable execution – Customized solutions that meet your expectations

Technology and data, coupled with our expertise, can provide tailor-made solutions for installing building systems according to manufacturer's specifications.

Johnson Controls buildings installation services, includes:

- **Installation Supervision**

Assist in ensuring your facility ramps up smoothly

- **Startup and Commissioning**

Peace of mind to ensure your operations run smoothly from day one.



Operate services

Unlock the complete potential of your facility

Ensure your facility delivers optimum value


Achieve complete peace of mind regarding the needs of your facility during the service life of equipment systems. Technology, data, and expertise ensure that building systems are **operated** and **maintained** according to manufacturer's **recommendations**.



Operate

Operation excellence helps to run facilities smoothly.

- **Remote Operations**
Ensure your facility is operated at optimal performance
- **Field Operations**
Experience and expertise to run your critical facilities.

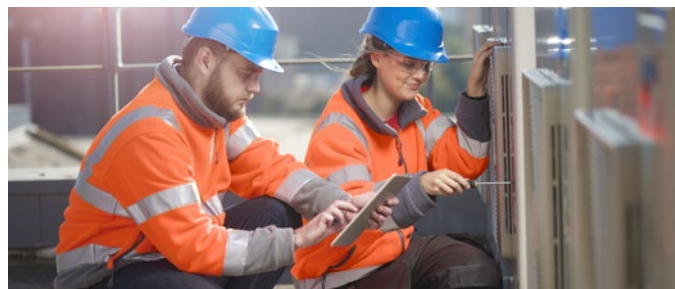

Maintain

Assistance to ensure your facility works at optimal performance with tailored planned maintenance agreements or ondemand.

- **Predictive Maintenance**
Advanced analytics and machine learning
- **Condition-Based Maintenance**
Diagnostics: oil, vibrations, thermographies, efficiency and more
- **Preventative Maintenance**
Customized onsite maintenance plans
- **Remote Maintenance**
Remote inspections to optimize maintenance plans
- **Emergency Management**
Prevent and mitigate damages during critical events
- **Repair**
Faster restarts and specifications recovery
- **Extended Warranty**
Optimized budget of your business beyond factory warranty.



Replacement parts


Get genuine parts and accessories you need to complete your work.



Training

Skills required for the smooth operation of your facility.

Optimize services

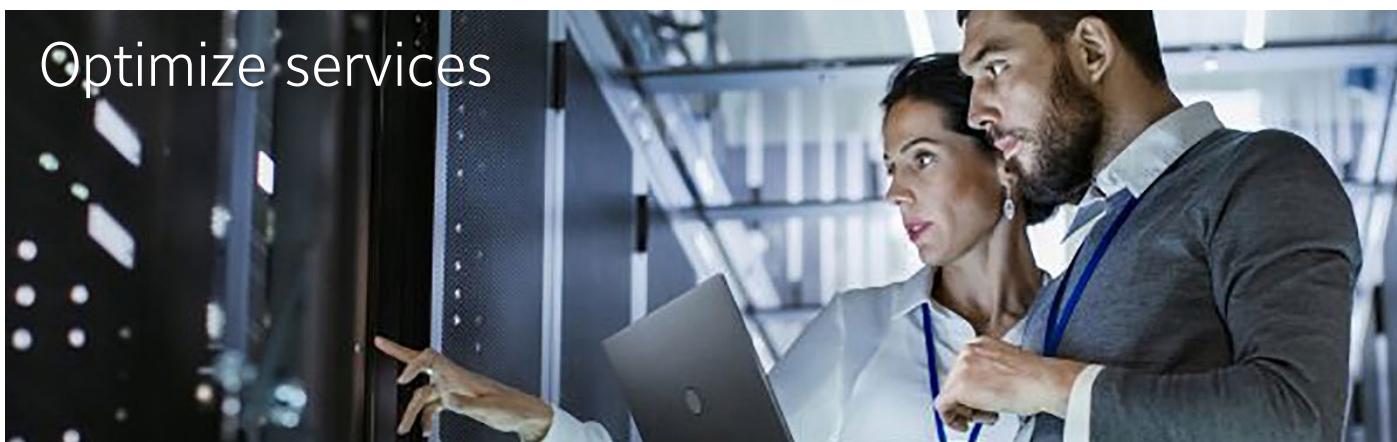

Plan ahead, get your buildings ready for the future

Optimizing business facilities because regulations, solutions and needs evolve

Equipment and systems, age because of usage, obsolete because of new generations with enhanced features, and unmatch your needs because they evolve along with the industry you are playing in. Despite annual reviews with your facility managers to analyze data and targets, to identify open issues and next course priorities, to discuss on budget deviations and next year budget planning based on business as usual.

- **Regulatory Compliance**

Assist in ensuring regulations-compliant facilities

- **Asset Management**

Align your asset management practices with your business strategy: Maintenance assist, Asset diagnostic and Modernization plans

- **Efficiency Management**

Operational efficiency helps to make buildings more productive: Energy efficiency services and Asset efficiency studies

Modernize services



Sustainable facilities with longer life

Ensure your facilities deliver their best for longer duration while maintaining sustainability

Discover a **wide program of solutions** to keep facilities at a peak performance while optimizing operational costs extending their service. Every solution is customized to your budget and business needs. Multiple factors like the condition of the system, its age, or its critically in business operations will determine the ease of each solution.

- **Enhance**

Smart upgrades for augmenting your facility's potential: Chiller plant alarm system, EC fans, Variable Speed Driver, Controller software, Chiller Plant Optimization and more

- **Retrofit**

Cost-efficient and high-performing replacement solutions for extending equipment lifespan: Compressor, Heat exchanger, Controller, Refrigerant migration and more

- **Renew**

Renovation solutions that are safe, efficient and reliable.


Johnson Controls' eCatalog

Johnson Controls' eCatalog, also known as the "Virtual Branch", is not only an extensive database of product information but also a point of entry into our organization.

Within the eCatalog you are connected to the cloud and hence stay up-to-date on all new product launches, product selection tool releases and updates, technical documents, eLearning modules and much more. You will reach our products in 3-clicks or less through the use of a powerful search engine and a very easy-to-browse navigation menu. You can also view the purchase prices online for many of our products and check the availability of stocked items at a glance. Also, rest assured that access to our network of Sales Representatives and Technical Support teams is directly available for your use.

**Call your Sales Representative
and request access now.**

<https://virtualbranch.johnsoncontrols.com/vb/>

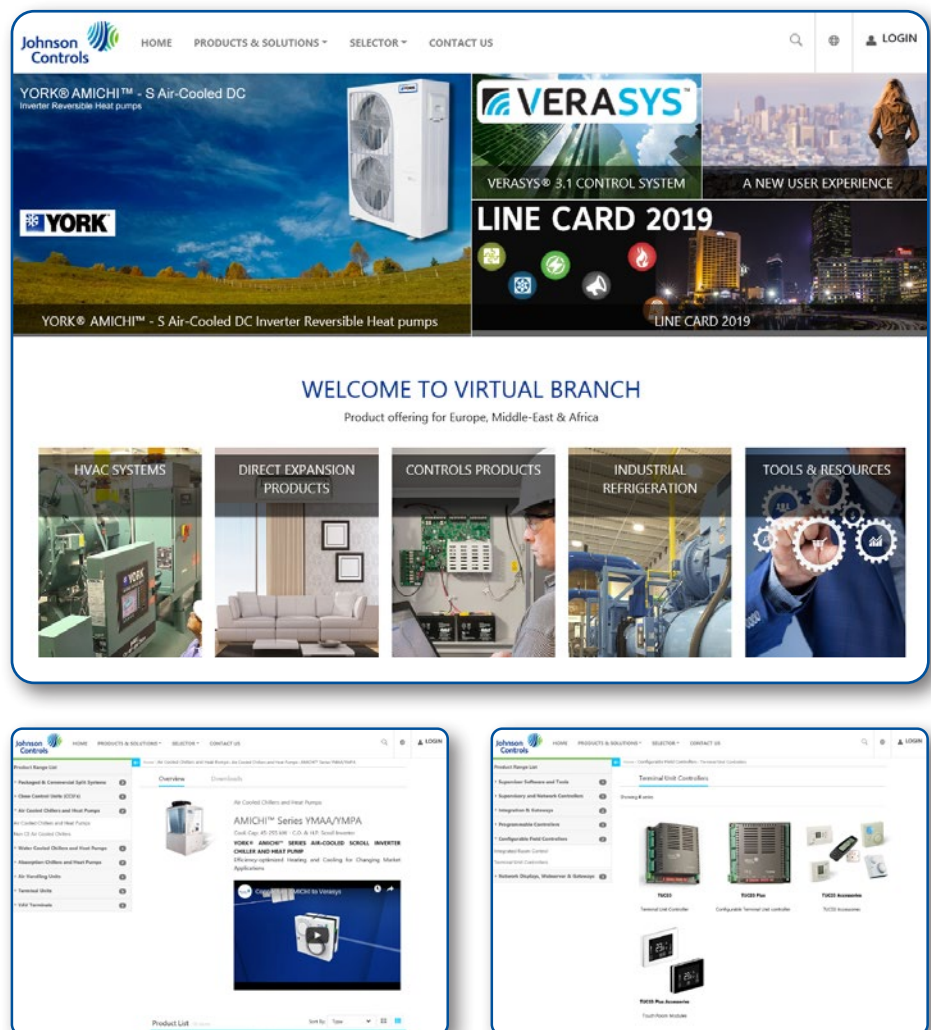





About Johnson Controls

Johnson Controls delivers products, services and solutions that increase energy efficiency and lower operating costs in buildings for more than one million customers.

Operating from 500 branch offices in more than 150 countries, the company is a leading provider of equipment, controls and services for heating, ventilating, air-conditioning, refrigeration and security systems. Johnson Controls is involved in more than 500 renewable energy projects including solar, wind and geothermal technologies.

Its solutions have reduced carbon dioxide emissions by 13.6 million metric tons and generated savings of \$7.5 billion since 2000. Many of the world's largest companies rely on Johnson Controls to manage 1.5 billion square feet of their commercial real estate.

For additional information, please visit www.johnsoncontrols.com or follow us [@johnsoncontrols](https://twitter.com/johnsoncontrols) on Twitter.

For additional information about YORK HVAC products, please visit www.johnsoncontrols.co.uk